


**Bio-Pure 5 E Range (Pumped Unit) Technical Sheet**

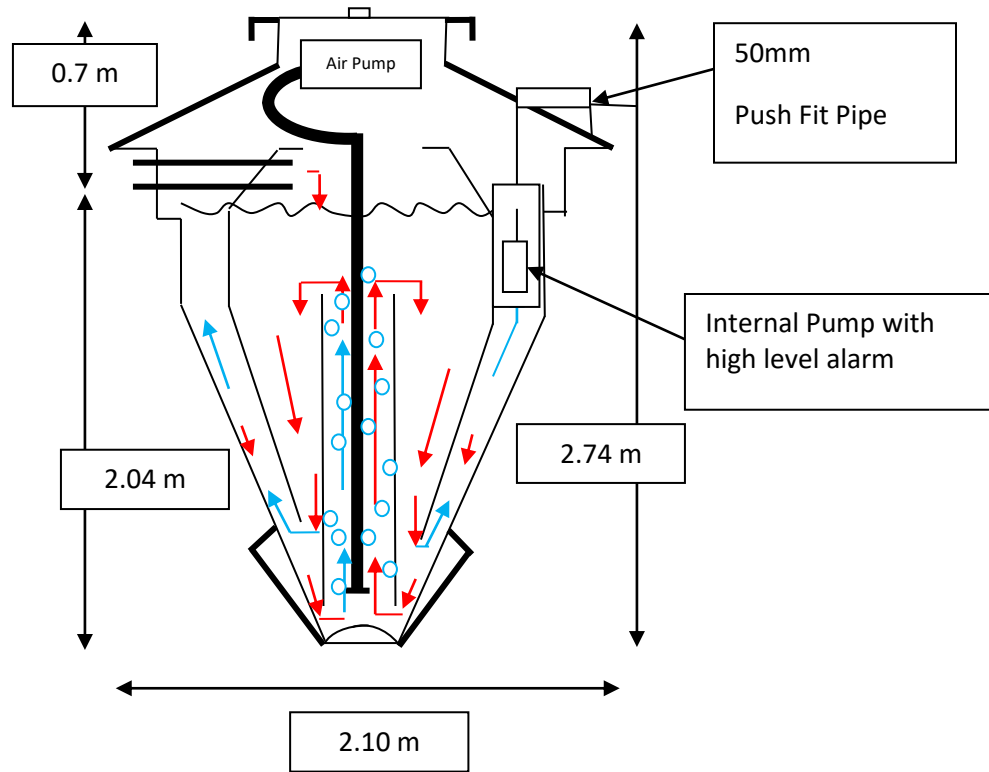

Independently Tested & Certificated to BS EN12566-3

No of Persons	14 to 22
Maximum average daily flow	3300 litres
Maximum BOD/day	1320 g
In ground depth	2.74 m
Outside diameter	2.10 m
Inlet Invert	0.7 m
Outlet Invert	0.8 m
Weight empty	230 kg
Total capacity	3975 litres
Power consumption	140 watts

<u>Discharge level</u>	
Biological oxygen demand (BOD)	20 mg/l
Suspended solids	30 mg/l
Ammonia (NH3)	20 mg/l