





EXISTING (PART) PLAN

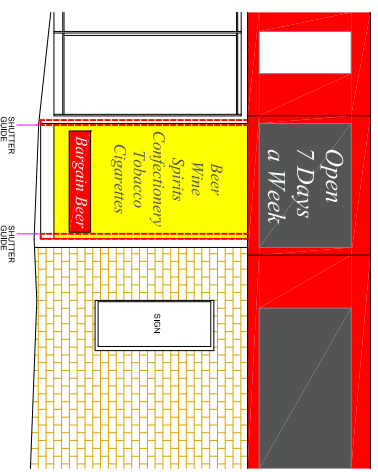


EXISTING ELEVATION

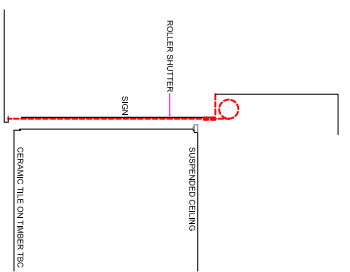


EXISTING SECTION VIEW A-A

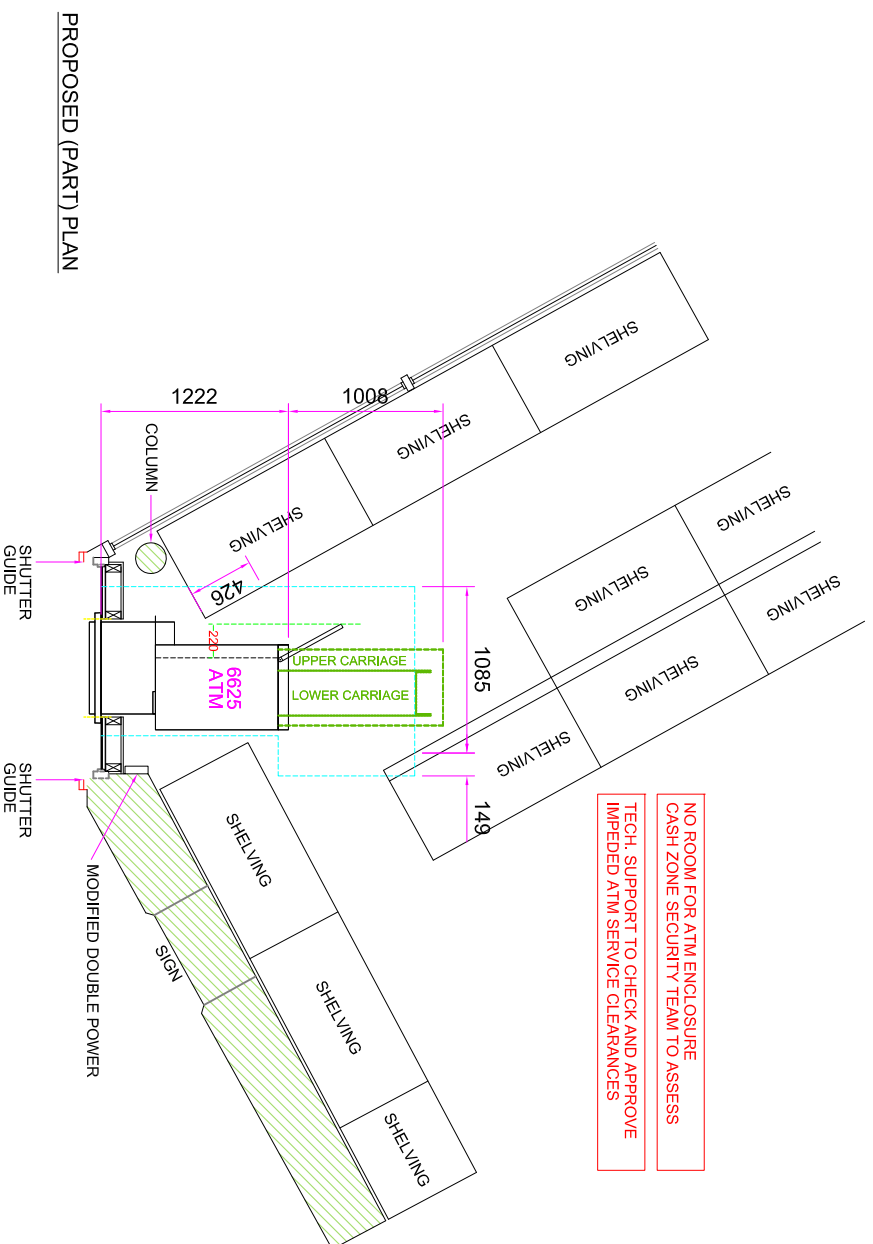

PROPOSED (PART) PLAN

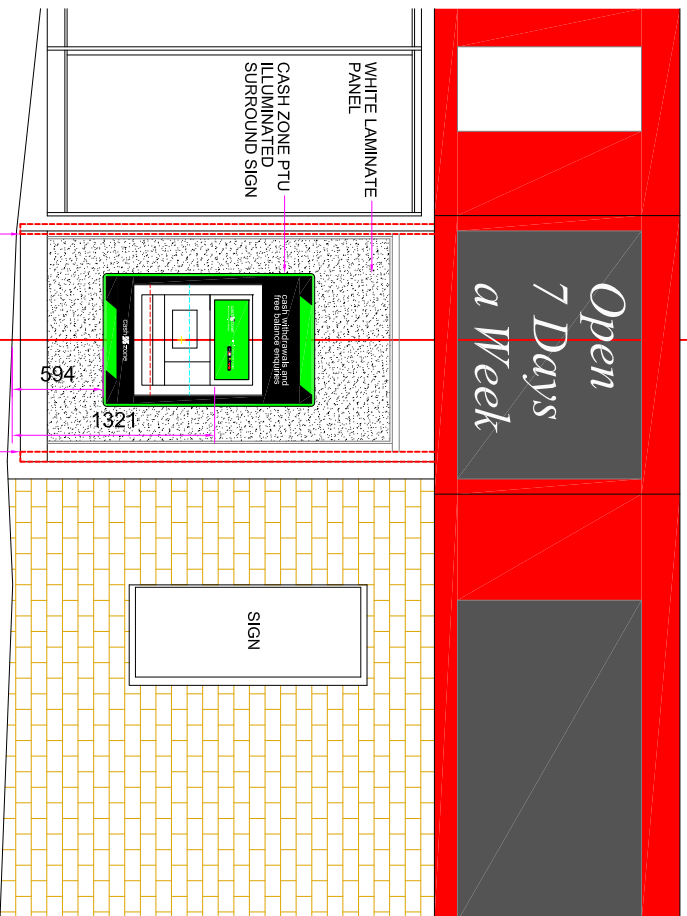

PROPOSED ELEVATION

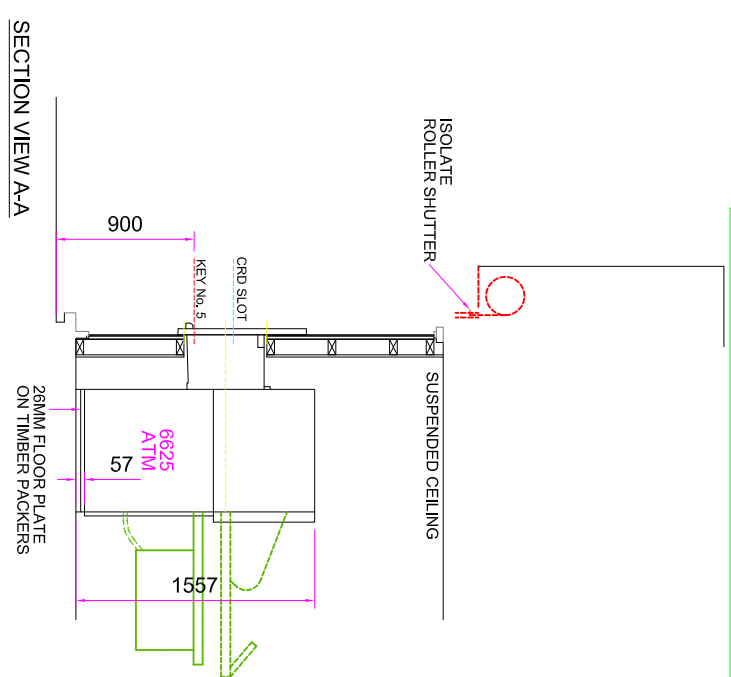

SECTION VIEW A-A



NO ROOM FOR ATM ENCLOSURE
CASH ZONE SECURITY TEAM TO ASSESS
TECH. SUPPORT TO CHECK AND APPROVE
IMPEDED ATM SERVICE CLEARANCES

DO NOT SCALE EXCEPT FOR PLANNING AND BUILDING REGULATION PURPOSES

GENERAL NOTES

LIGHTING:-
ALL LIGHTING TO BE POSITIONED TO AVOID DIRECT GLARE ON THE EYES OF THE USER AND UNWANTED REFLECTIONS FROM THE SCREEN OR OPERATING FEATURES. GLARE FROM LIGHTING TO BE AVOIDED.
SIGNAGE:-
ALL SIGNAGE TO CONFORM TO BS 8300:2001. SECTIONS 9.2.2 LOCATION & DESIGN OF SIGNS & INFORMATION AND 9.2.3 VISUAL SIGNS.
ALL NEW GLAZING CONFORMS TO BS 6206.
ALL ELECTRICAL WORK CONFORMS TO BS 7671.
IT IS ASSUMED THAT ALL PRELIMINARY WORKS CARRIED OUT / CONTRACTED BY THE SITE OWNER (SHOULD THEY BE REQUIRED BY THE PROJECT) ARE COMPLETED IN ACCORDANCE WITH CURRENT BUILDING REGULATIONS 2010 AND AMENDMENTS THEREAFTER

SITE NOTES

FLOOR CONSTRUCTION:
CERAMIC TILE ON TIMBER TBC
TTW INSTALL
REMOVE EXISTING SIGN AND GLAZING PANEL / LAMINATE PANEL WORKS TBC
ISOLATE ROLLER SHUTTER IN OPEN POSITION
INSTALL: WHITE LAMINATE PANEL. SECURITY STUDWORK. 28MM FLOOR PLATE ON TIMBER PACKERS, ATM AND ILLUMINATED SIGNAGE
MAKE GOOD INTERNAL APERTURE WITH WHITE PLASTIC TRIM
INSTALL FLOOR SUPPORTS TO BASEMENT - SUBJECT TO DES. SURVEY RESULTS
ELECTRICIAN TO CARRY OUT EICR & TEST TO EXISTING / MODIFIED ATM ELECTRICS

NOTES:
- NO ASBESTOS REG. - CSS TO ARRANGE SURVEY PRIOR TO FURTHER SURVEYS AND INSTALLATION WORKS COMMENCING
- NO ATM ENCLOSURE UNABLE TO FIT - C2 SECURITY TEAM TO ASSESS
- TECH SUPPORT TO CHECK AND APPROVE IMPEDED ATM SERVICE CLEARANCES
- NO ACCESS BEHIND SIGN / ROLLER SHUTTER IN ATM INSTALL LOCATION AT TIME OF SURVEY / BUILD UP UNKNOWN
- ABOVE WORKS SUBJECT TO DESTRUCTIVE WALL AND FLOOR SURVEY
- PARKING RESTRICTIONS APPLY / CHARGEABLE ON STREET PARKING MAX. STAY 90 MINS / PARKING TICKETS LIKELY

WORK TO BE CARRIED OUT BY OTHERS

RELOCATE: 1 X INT. CCTV CAMERA, 1X EXT. CCTV CAMERA, 1 X AISLE SHELVING UNIT
MODIFY EXISTING DOUBLE SOCKET TO ENSURE DEDICATED BREAKER FOR ATM USE
PROVIDE ACCESS TO ATM. BASEMENT AND MAINS ELECTRICS FOR ASBESTOS SURVEY
CLEAR ACCESS TO BASEMENT FOR CSS BUILDER TO CARRY OUT FURTHER WALL AND FLOOR SURVEY TO CONFIRM CONSTRUCTION OF BOTH AT ATM LOCATION AND ON DAY OF INSTALLATION WORKS

SITE ADDRESS

BARGAIN BEER
8A DICKSON ROAD,
BLACKPOOL,
FY1 2AA

TITLE	PROPOSED AUTOMATED TELLER MACHINE (ATM) INSTALLATION FOR CASHZONE
DRAWN	MAL
DATE	10/02/21
SCALE	VARIOUS @A3
REVISION	01
REVISION DESCRIPTION	

04	
03	
02	
01	

drawing approval

NAME:-	
POSITION:-	
DATE:-	
APPROVED:-	
SIGNED:-	

