

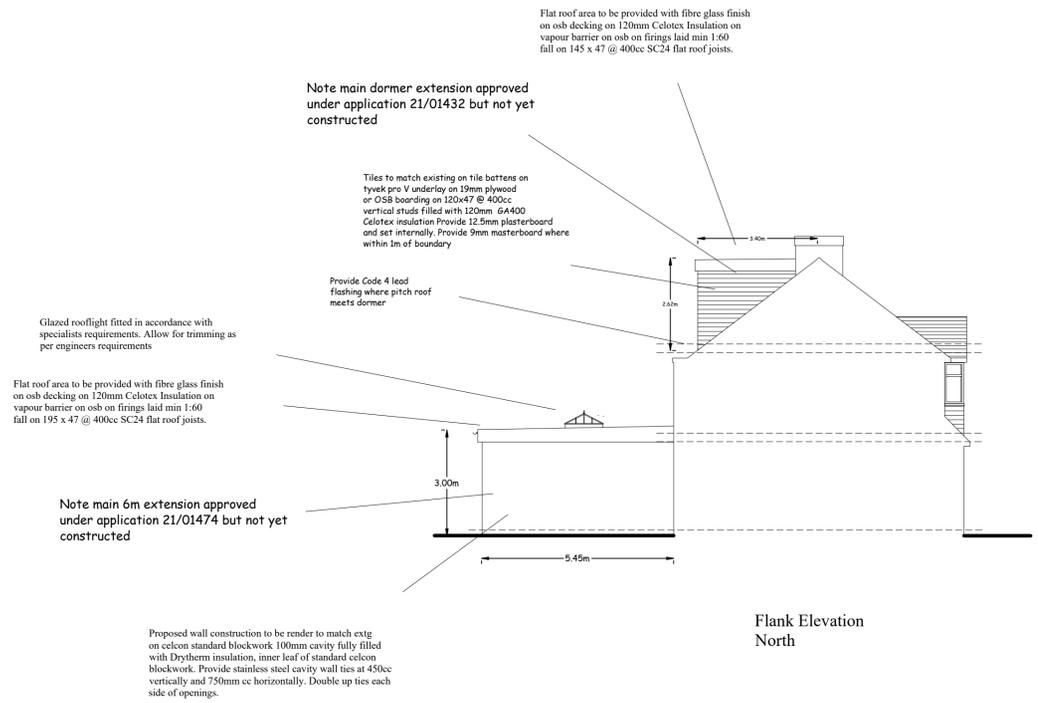


Note main 6m extension approved under application 21/01474 but not yet constructed

Proposed wall construction to be render to match extg on celcon standard blockwork 100mm cavity fully filled with Drytherm insulation, inner leaf of standard celcon blockwork. Provide stainless steel cavity wall ties at 450cc vertically and 750mm cc horizontally. Double up ties each side of openings.

Note bkw to ground floor extension to front

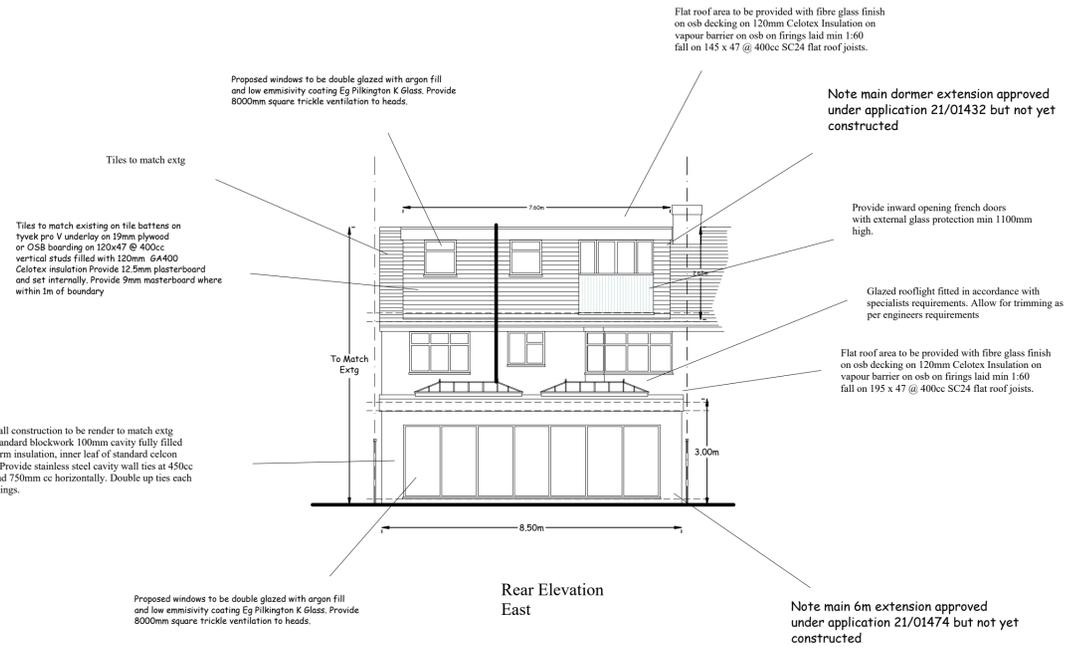

Client	Mr Richards	Drawing Title	Proposed Elevations
Job Title	14 Meadowview Road Ewell KT19 9UB	Scale	1:100
		Date	August 2021
		Drawing No	21/31-13
		Drawn By	KRS Designs