


Remove external ATM.
Infill aperture with outer leaf of natural stone, to match and course with the existing, minimum 50 residual cavity, 60 Kingspan TW50 partial fill cavity wall insulation, inner leaf of 100 solid concrete blockwork, and 57.5 Kingspan K118 thermally insulated plasterboard & skim internal lining, to meet the requirements of the Non-domestic Technical Handbook, Table 6.1. Tie the leaves to the existing wall. Install austenitic stainless steel wall ties with insulation retaining clips at maximum 450 centres vertically and horizontally.

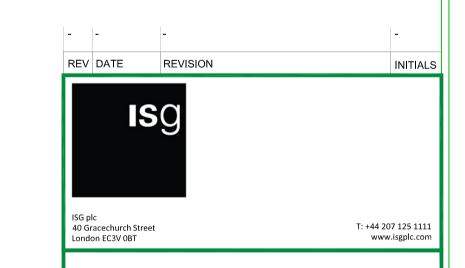

LLOYDS BANKING GROUP

ALL DIMENSIONS TO BE VERIFIED PRIOR TO COMMENCING WORK. DRAWING TO BE READ IN CONJUNCTION WITH PROJECT SPECIFICATIONS.

THIS DRAWING IS THE PROPERTY OF LLOYDS BANKING GROUP AND COPYRIGHT IS RESERVED BY THEM. THE DRAWING IS ISSUED ON CONDITION THAT IT IS NOT COPIED OR DISCLOSED BY OR TO ANY UNAUTHORISED PERSONS WITHOUT PRIOR CONSENT IN WRITING TO LLOYDS BANKING GROUP - GROUP PROPERTY. ALL MODIFIED DRAWINGS SHOULD BE RETURNED TO LLOYDS BANKING GROUP.

GROUP PROPERTY

BRISTOL - PO Box 112, Canons House, Canons Way, BRISTOL, BS99 7LB EDINBURGH -Sighthill South, 12 Bankhead Crossway South, EDINBURGH, EH11 4EN HALIFAX - Trinity Road, HALIFAX, West Yorkshire, HX1 2RG

	· · · · · · · · · · · · · · · · · · ·	
	PROJECT ADDRESS	SCALE
	Brand - BoS	A1 - 1:50
	Banff Low Street 29 Low Street BANFF AB45 1AU	A3 - 1:100
		DATE
	DRAWING DESCRIPTION	19-03-2024
	Front elevation	DRAWN BY
	As proposed	TJ
	DRAWING NUMBER	REVISION
	50963181-AR01-E1-0210	-