
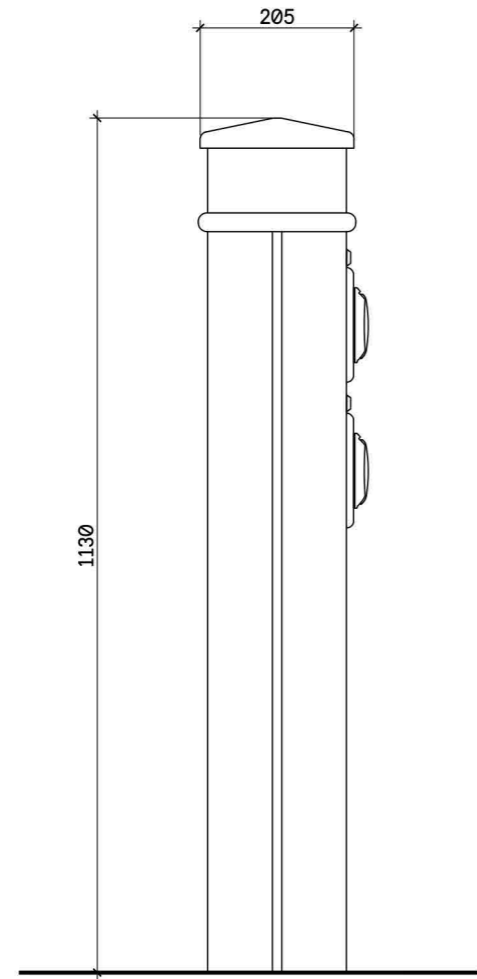



This copy has been made by or with the authority of Midlothian Council pursuant to Section 47 of the Designs and Patents Act 1988. Unless that Act provides a relevant exception to copyright, the copy must not be copied without the prior permission of the copyright owner.

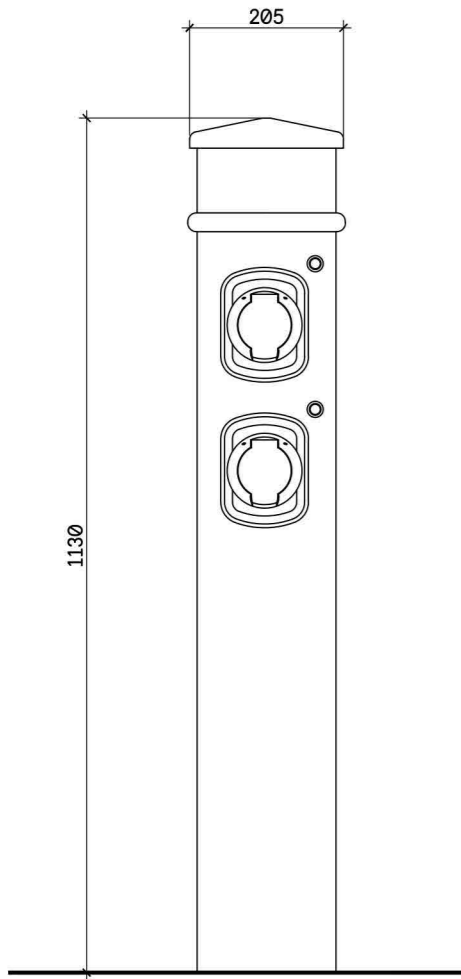

CHARGING POINT - FRONT ELEVATION  
SCALE: 1:10

CHARGING POINT - SIDE ELEVATION  
SCALE: 1:10

FOR PROPOSED LOCATIONS OF E.V. CHARGING POINTS  
REFER TO SITE PLAN AS PROPOSED



PROPOSED 50 BED CARE HOME  
HAWTHORN GARDENS  
LOANHEAD

EXTERNAL DETAILS:  
EV CHARGING POINT DETAILS

DWG NO: 173-702 REV: -

SCALE: 1:10 SIZE: A4 DRAWN BY: MP CHECKED BY: SD

PRODUCT SPECIFICATIONS

General

Model/Manufacutre	BASIC CHARGE Pedestal, 32amp, 2 Sockets Supplied by EV OneStop (www.evonestop.co.uk) Refer to relevant product data sheet for further details
Dimensions	205mm x 1130mm x 205mm (W x H x D)
Standard Body Colour	Black (Other colours available upon request)
Standard Pod Colour	Green (Other colours available upon request)
Pedestal Material	High impact resistant Foamex outer shell
Internal Chassis	Heavy duty, hot dipped galvanised steel
Operating Temperature	-30°C to +50°C
Certifications & Compliances	Wiring Regulations - BS 7671 (17th Edition) IET EV Regulations, Glow Wire Testing - IEC 60695-2-13 EMC Compliance - EN 61000-6-3:2007, EN 61000-6-2:2005 Safety Compliance - EN 60950-1:2006, EN 60950-22:2006, Low Voltage Directive (LVD) 2014/35/EU Environmental Protection - IP65 (Category 1) Weatherproof BS EN 60529, UL94 Flame Rating at V2 for 1.5mm and 3.0mm



ELECTRICAL

Product Code	EVCL2018
Charging Socket(s)	2x IEC 62196 (Type 2)
Rated Output	22kW
Rated Current	32A
Charge Protocol	Mode 3
EV Charging Compliance	EN 61851-1:2001, EN 61851-21:2002, EN 61851-22:2002
Input Voltage	400V AC/50Hz (3 Phase)

