


Notes:
 Please report all discrepancies, errors and omissions.
 Verify all dimensions on site before commencing any work on site or preparing shop drawings.
 All materials, components and workmanship are to comply with the relevant British Standards, Codes of Practice, and appropriate manufacturers recommendations that from time to time shall apply.
 For all specialist work, see relevant drawings.
 This drawing and design are copyright of RMB Consultants (Civil Engineering) Ltd.
 When this document is provided in electronic file format it is intended as a guide only and the recipient is to verify all dimensions and details with the Architects. If this is not acceptable, the files must be returned unused together with a written communication declining acceptance of this condition.

Key

- Public foul sewer
- Public SW sewer
- Foul drainage
- SW drainage
- Channel Drain
- Rodding eye
- F1 0.00 / 100
80.0 / 2.000 Reference / diameter gradient / length
- Tree Protection
- No dig hard surfacing
- New wearing course over existing hardstanding

Levels based on topographical survey and finished floor levels.

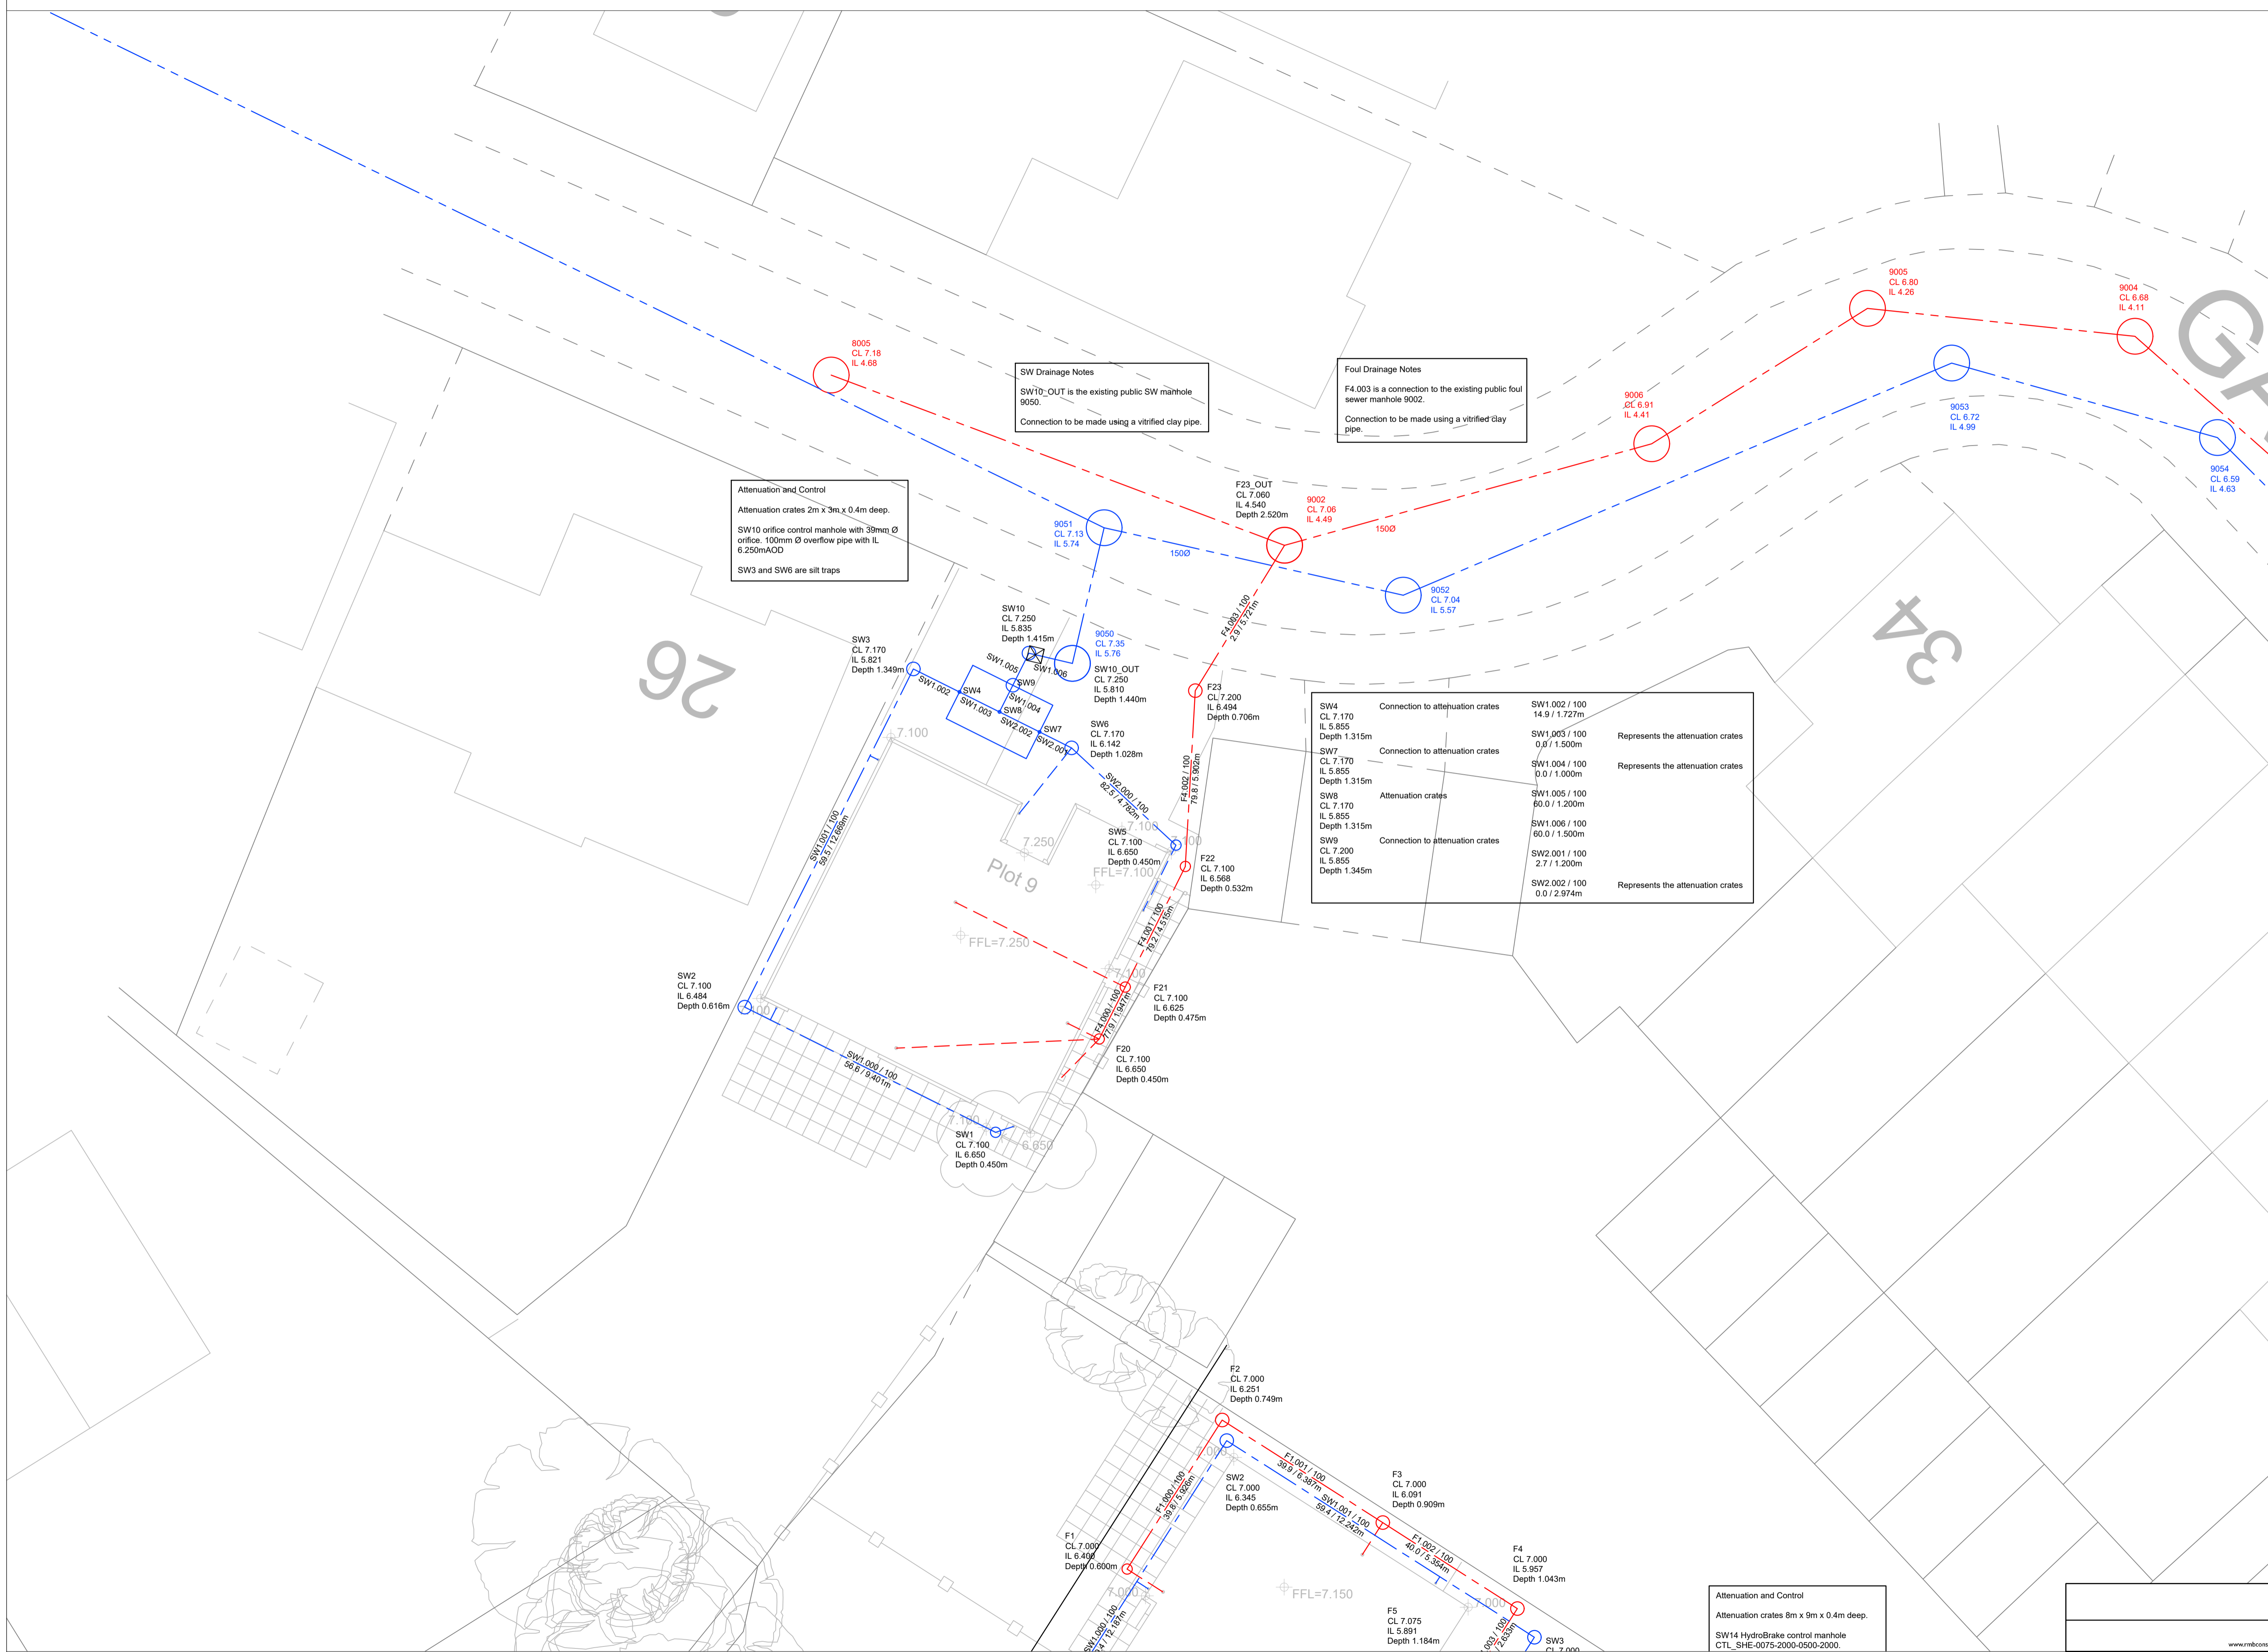

Rev.



Attenuation and Control
 Attenuation crates 8m x 9m x 0.4m deep.
 SW14 HydroBrake control manhole
 CTL_SHE-0075-2000-0500-2000.

RMB
 39 Cossington Road Canterbury Kent CT1 3HU
 Tel: Fax: 01227 471238 Mobile: 07886 185705
 www.rmbconsultants.co.uk robert.bee@rmbconsultants.co.uk