


# BIOTEC

Economical sewage  
treatment plant

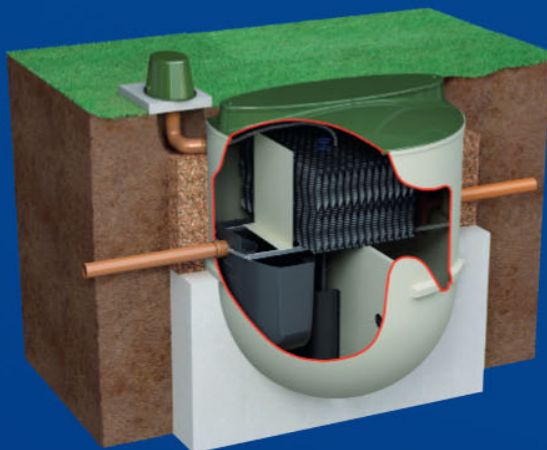


**60** YEARS OF  
Expertise &  
Innovation

1955-2015

# THE ECONOMICAL SEWAGE TREATMENT PLANT

The BioTec is the economical off-mains solution for single houses and employs the aerobic biological process for the treatment of domestic sewage. The BioTec range is fully compliant, tested and approved to EN 12566-3 and is CE marked to meet the latest Construction products regulations.

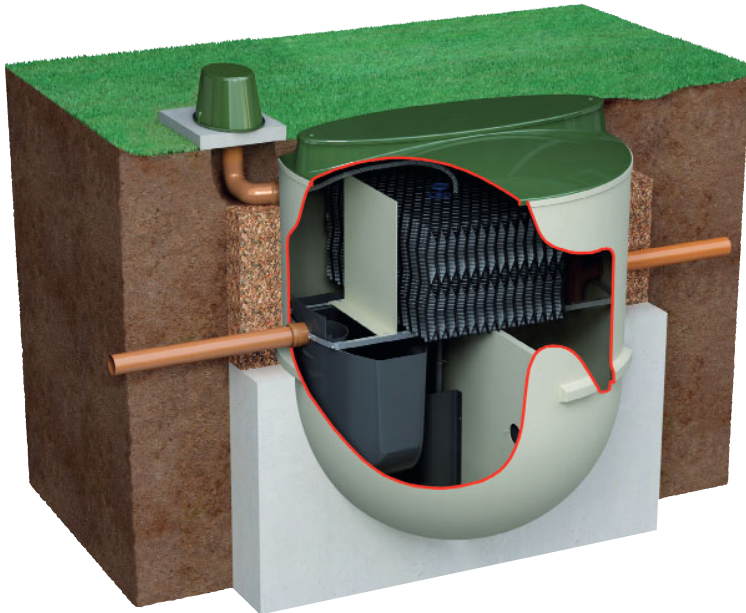

## FEATURES AND BENEFITS

- › Low-level visibility pedestrian cover
- › Treats sewage using a traditional elevated filter
- › Externally mounted blower for simple maintenance
- › Manufactured from robust GRP

## LEGISLATION, STANDARDS & CODES

- › EN 12566-3 tested and approved
- › CE marked

## SPECIFICATION

MODEL REF	INLET INVERT** OPTION	TESTED TO POPULATION EQUIVALENT	DESLUDGE PERIOD (months)*	WEIGH EMPTY APPROX. (kg)	OUTSIDE DIA. (m)	Height (m)	INLET INVERT TO BASE (m)	OUTLET INVERT TO BASE (m)
Biotec-1	1 m	6	12	250	1.85	2.2	1.2	1.00
Biotec-1 IPS	1 m	6	12	260	1.85	2.2	1.2	1.6
Biotec-2	1 m	12	8	275	1.85	2.7	1.7	1.6
Biotec-2 IPS	1 m	12	8	285	1.85	2.7	1.7	2.1
Biotec-3	1 m	18	9	300	2.7	2.6	1.6	1.5
Biotec-3 IPS	1 m	18	9	310	2.7	2.6	1.6	1.945
Biotec-4	1 m	25	6	320	2.7	2.6	1.6	1.5
Biotec-4 IPS	1 m	25	6	330	2.7	2.6	1.6	1.945

\* Desludge period based on full load. Reduced occupancy equates to increased desludge period.

\*\* 1.5m Inlet invert also available.

**5 Year  
EXTENDED WARRANTY  
OPTIONS AVAILABLE**



Kingspan Klargester is part of  
Kingspan Environmental

For further information:  
College Road North,  
Aston Clinton, Aylesbury  
Buckinghamshire HP 22 5EW  
Tel: 01296 633 000  
Fax: 01296 633 001  
[www.kingspanenviro.com/biotec](http://www.kingspanenviro.com/biotec)

Wardhead Park  
Stewarton  
Ayrshire, KA3 5LH  
Tel: 01560 486588  
Fax: 01560 486589