

Details

All windows manufactured by Preservation Windows are made from a 'Majou' hardwood to the specification and guidelines within BSEN942 "General Classifications of Timber Quality"


The glass to be installed (due to size restrictions) will be the 'Slimlite Heritage Range' and standard double glazed units. 4mm Super Low 'E' / 12mm Super Spacer - gas filled / 4mm clear. This will create a 20mm unit and a 'U' value of 1.4w/m2K.

The glazing units will be bedded in to the sashes using a Silfix U9 Sealant then another bead will be applied to the front edge of the glass. Once this has set a putty line is then applied using a linseed multi-purpose putty. The Silfix sealant is required to protect the bitumen from breaking down against the putty.

The process allows us to create a window with a traditional putty line and remains in keeping with the original single glazed windows.

All windows will be painted to the exterior with 3 coats Sherwin Williams Laqvin prime and finished with Laqvin Top and the interior will be colour/stained match to the existing.

All windows will have the concealed draught proofing system installed.

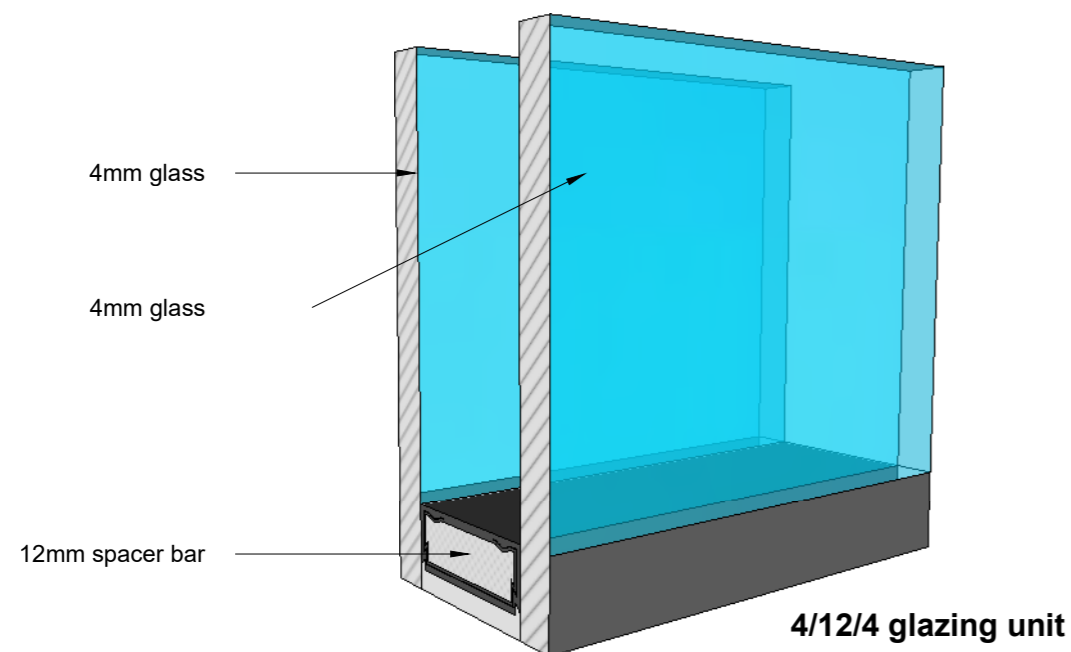

PRESERVATION WINDOWS
6 Telford Place
Lenziemill
Cumbernauld
G67 2NH

Glazing info