



VEHICLE ENTRY TO SITE



**PHEONIX REFUSE VEHICLE (3 AXLE)**  
 OVERALL LENGTH 11.0M  
 OVERALL WIDTH 2.450M  
 OVERALL BODY HEIGHT 3.814M  
 MIN BODY GROUND CLEARANCE 0.366M  
 TRACK WIDTH 2.450  
 LOCK TO LOCK TIME 4.00S  
 KERB TO KERB TURNING RADIUS 9.500M

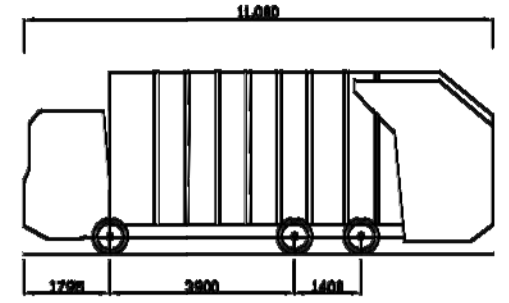

VEHICLE EXIT FROM SITE

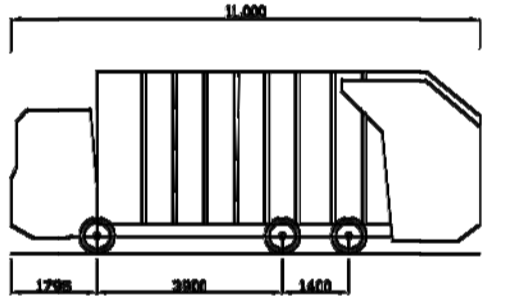

**PHEONIX REFUSE VEHICLE (3 AXLE)**  
 OVERALL LENGTH 11.0M  
 OVERALL WIDTH 2.450M  
 OVERALL BODY HEIGHT 3.814M  
 MIN BODY GROUND CLEARANCE 0.366M  
 TRACK WIDTH 2.450  
 LOCK TO LOCK TIME 4.00S  
 KERB TO KERB TURNING RADIUS 9.500M

Rev	Drawn	Date	Description

Contract  
**KEBBELL HOMES**  
 ST PETERS  
 MAIN ROAD  
 GAINFORD

Drawing Title  
**SWEPT PATH ANALYSIS**  
**FOR 11m REFUSE VEHICLE**  
**AT SITE ENTRANCE**

**MOOREHEAD SUTTON & LAING**  
 Consulting Civil, Structural and  
 Environmental Engineers  
 20 Woodlands Road, Middlesbrough TS1 3BE  
 ☎ 01642 240525  
 www.MSLEngineers.com

Scales (A1) 1:100 Date NOV 2021  
 Drawn GM Checked

Contract No. 4487M Drawing No. SPA01

REVISION	