


North Elevation (Window spec section 1.3). painted shut. age (Section 1.5)

South Elevation (Window spec section 1.3). all painted shut. age (Section 1.5)

FF 20-22 Remove existing Triple leaded light and dispose. Manufacture supply and install new Triple fixed light with leaded detail to match existing with privacy glass fitted.



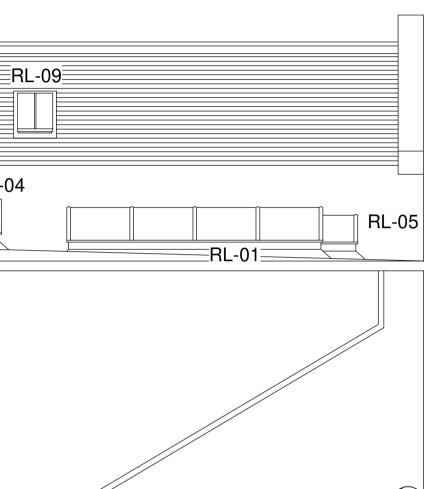

South 1:50

Allow for 80% of windows on North elevation to to have sills replaced

Allow for 100% of putty to be replaced. Allow for 80% of the sash frames to be reburbished. Unknown the full extent due to windows being painted shut.

Allow for paint removal (Section 1.8) on 50% of the windows. FF 1-7 all

Allow for 80% of windows ironmongery to be replaced due to wear and

Allow for 70% replacement of the sash cords and weights (Section 1.9)

Allow for 90% of windows on North elevation to to have sills replaced

Allow for 100% of putty to be replaced. Allow for 80% of the sash frames to be reburbished. Unknown the full extent due to windows being painted shut.

Allow for paint removal (Section 1.8) on 40% of the windows. GF 16-19

Allow for 90% of windows ironmongery to be replaced due to wear and

Allow for 90% replacement of the sash cords and weights (Section 1.9)