



single hinged in equal leg frame – face fix option  
(order code: SH-A-FF)



flush profiles create a super  
slim 54.6mm sightline  
whilst offering fully sealed  
draft exclusion




slimline profile allows for  
specified gauge fixing to  
be concealed after  
installation

## Key Features



- bespoke internal cam lock and inline handle with key locking feature, butt hinges allow for almost 180° internal opening.
- standard product white finish (semi-gloss) RAL colours special metallic and woodgrain finishes available
- minimum size: 300 x 300
- maximum size: 1000 x 2400

## Uses

- suitable for most window styles, often used in combination with horizontal or vertical sliders as part of a segment bay window solution.
- fix directly to primary window frame for optimum thermal effects
- position up to 150mm away from primary window glass for dramatic noise cancelling effects

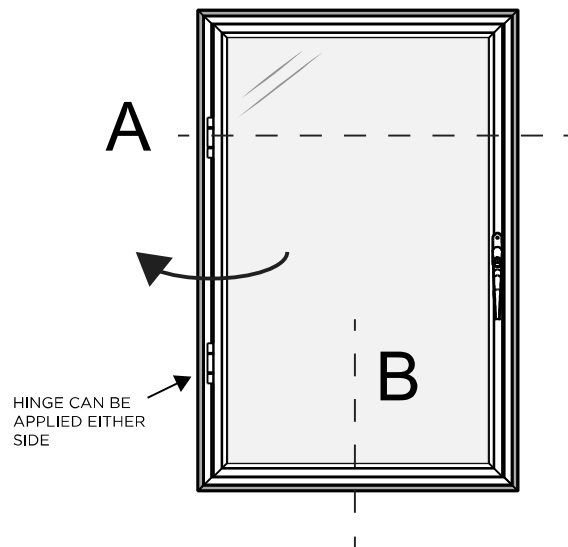

Material:	all aluminium sections manufactured in UK from 6063T6 extruded in UK to BS1474
Finish:	standard sections finish in SA098E semi gloss (Interpon) all to BS : 6496 1984, produced in a factory controlled by BS 5750 Part 2 (EN29002) ISO9002 approved by qualicoat supplier with seaside endorsement (Licence No. 1001). RAL colours or equivalent available on request. all products are supplied with trims.
Weather seat:	sealed with twin polypropylene – products tested to draft standard - windows with seal tested for performance to BS 6375 and BS 5358
Glazing:	all units glazed with 4mm toughened safety glass (BS 6262) as standard other glazing options are available on request
Ancillaries:	<ul style="list-style-type: none"> <li>- pre tensioned spiral balances manufactured in UK to ISO 9001:2008</li> <li>- stainless steel ball bearing rollers fitted to horizontal sliding products as standard</li> <li>- slide locks fitted to all horizontal sliding products as standard, optional key locking fitch catches available (non locking available on request)</li> <li>- acoustic trickle vents available (sub-framed models only)</li> <li>- butt hinge on side hung models manufactured in UK</li> <li>- espagnolette handles for hinged units carry a 10 year mechanical guarantee, all are corrosion tested to BS EN 1670. BBA approved</li> </ul>

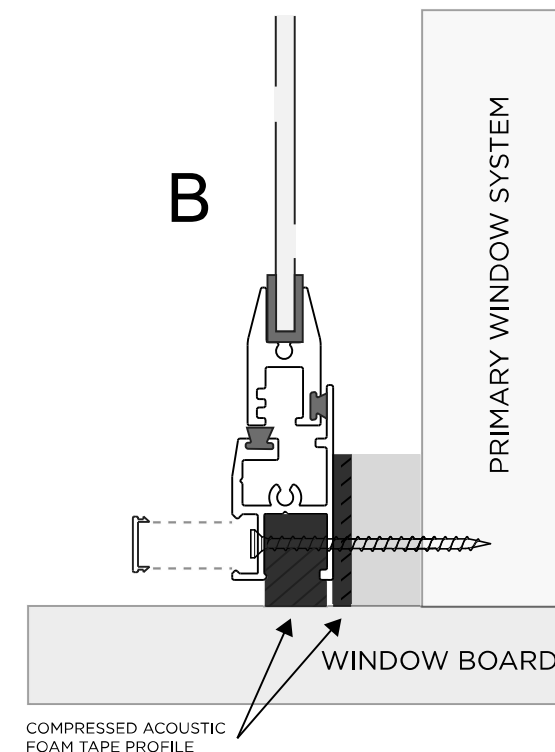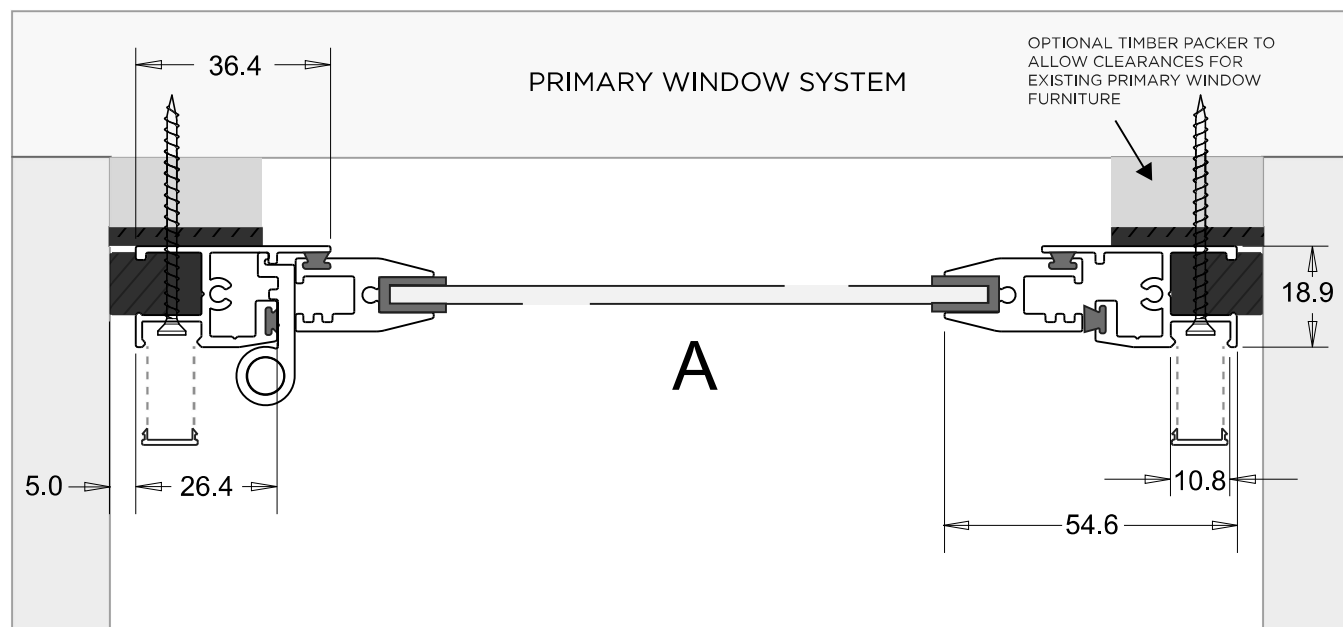

**Roseview**  
windows

Roseview Windows  
35 Stilebrook Road  
Olney  
MK46 5EA

Telephone: +44 1234 240 404  
Email: hello@roseview.co.uk

Specifications and results:		
50mm	100mm	150mm

Issue	Modification	Date
A	First Issue	14.04.2020
FOR REFERENCE ONLY. DO NOT SCALE FROM DRAWING. CHECK SIZE CALIBRATIONS.		
THIS DRAWING IS NOT FOR PRODUCTION PURPOSES. IT IS FOR EVALUATION ONLY.		
THIS DRAWING IS THE PROPERTY OF ROSEVIEW WINDOWS AND IS NOT TO BE USED OR REPRODUCED WITHOUT WRITTEN PERMISSION.		

Project:	SECONDARY GLAZING		
Title:	SINGLE HINGED IN EQUAL LEG FRAME - FACE FIX OPTION		
Drawing no:	SINGLE_HINGED_EQUAL_LEG_FACEFIX.pdf		
Created date:	14.04.2020	Units:	mm
Material:	SEE ABOVE	Scale:	1:1 @A3
Drawn by:	AM	Checked by:	AM
Notes:			
			pg 60