

# Air & Screen Wash

AIR-serv manufacture and supply the UK forecourt industry with market leading forecourt vending machines. The AIR-serv Air & Screen wash machine offers increased revenue potential by providing your customer with the ability to pay for both air and ready to use screen wash.

Available for customers through our unique Revenue Share and Rental programmes, AIR-serv provide the following benefits to forecourt operators:

- No capital costs - AIR-serv install and maintain the equipment at no cost to you.
- AIR-serv can supply the Screen wash concentrate.
- You share the revenue, and AIR-serv pay for the maintenance and upkeep.

## Machine Features:

- Cabinet made from high grade Stainless Steel
- Tallboy design cabinet for maximum visibility on site
- Intuitively operated digitally accurate tyre inflation
- Heavy duty retractable hose reel with heavy duty air hose
- Heavy duty retractable hose reel with heavy duty Screen wash hose and dispenser gun
- Machine fitted with frost protection, heating & insulation pack
- Machine presented in waterproof decal fitted with instructions and H&S disclaimers




## Vend Options:

- Cash Buy Time
- Contactless Payment
- Token
- Free vend

## Additional Options:


- Choice of vault
- Choice of protective kick plate
- Choice of decal

# Technical Specification

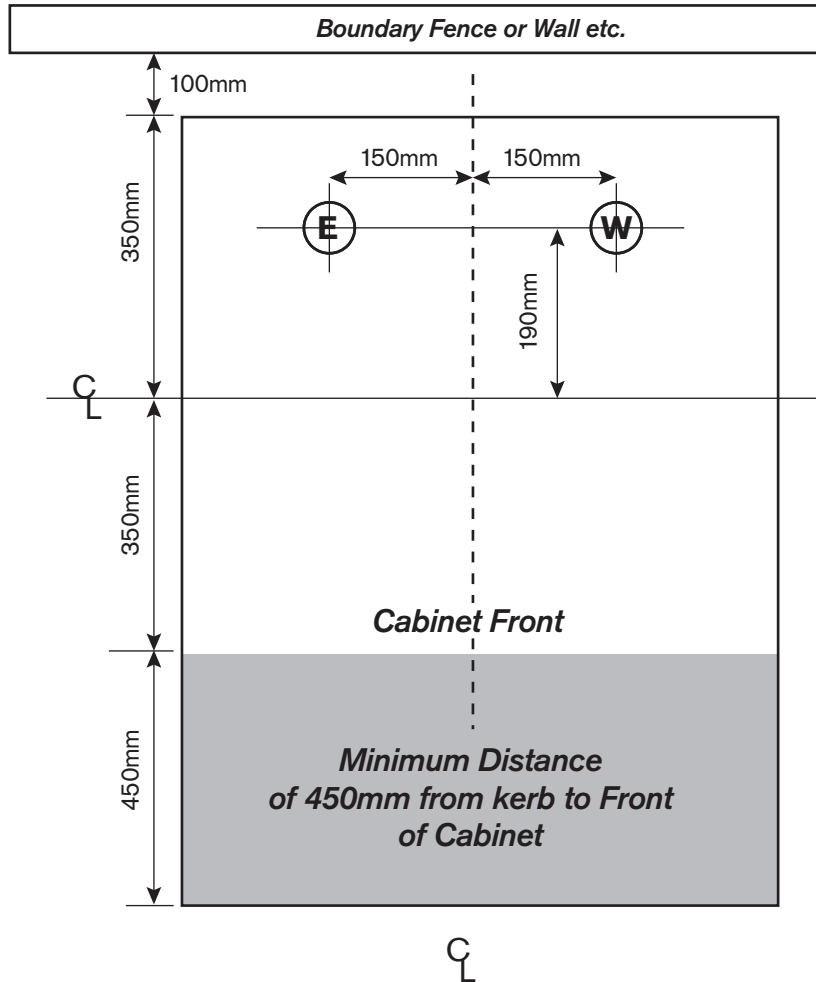

## Cabinet Footprint

Allow 450mm clearance for door opening



Allow 450mm clearance for door opening

## Base Specification

**Dimensions** Width 700mm x Depth 700mm.

**Base Thickness** 150mm Concrete.

**Cabinet to be securely Keyed in to the concrete.**

## Cabinet Dimensions

**Height** 1440mm

**Width** 560mm

**Depth** 520mm

**(E)** Electrical Supply Duct

**(W)** Water Supply Duct

## Electrical Requirements

- Constant 24 hour, 16 Amp 230/240 Volts AC Single Phase Supply
- Volt Drop must be calculated to ensure the above conditions are met
- All Supply Cables must be protected by RCD or RCBO Tripping current 30mA
- Also recommended a separate 6mm Earth Conductor (CPC)
- Minimum of 1 Metre of cable protruding above ground at the service point

## Water Requirements

- Constant 4 Litres per Minute
- Minimum of 1 Metre of 20mm insulated pipe protruding above the ground at the service point



Committed to promoting tyre safety  
AIR-serv are a member of Tyre Safe

CORRECTLY INFLATED TYRES  
A higher degree of safety - Upto 25% longer tyre life  
Lower fuel consumption - Lower CO2 emissions



AIR-serv, Redgate Road, South Lancashire Industrial Estate,  
Ashton-in-Makerfield, Lancashire WN4 8DT

sales@air-serv.co.uk  
www.air-serv.co.uk  
Telephone: +44 1942 722 333