



Site plan layout - existing access

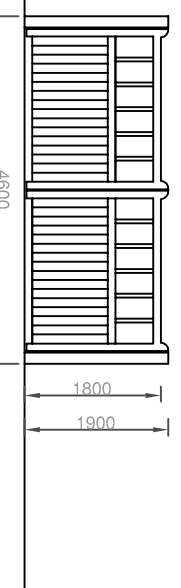

Gate detail

- Hedgerow Planting**
- New hedging to comprise Laurel:**
1. Planting should be carried out between 01 November and 31 March.
 2. Prior to planting, prepare the ground along a 1.5m wide strip to provide good soil conditions and as little competition from other vegetation as possible. Apply herbicide (glyphosate) to the 1.5m strip in the August/September/October prior to planting.
 3. Plants should be 2-year-old transplants about 450mm to 600mm in height.
 4. Plants should be in a staggered double row 40cm apart, with a minimum of 6 plants per metre.
 5. Plants should be protected with spiral guards supported with canes, and maintained clear of weeds until they're established.
 6. Failures should be replaced in the following planting season.
 7. Trim the newly planted hedge in at least the first 2 years to encourage bushy growth, allowing the hedge to become taller and wider at each cut.


NOTE - All trees, shrubs and bushes shall be maintained by the owner or owners of the land on which they are situated for a minimum of five years beginning with the date of completion of the scheme and during that period all losses shall be made good as and when necessary.

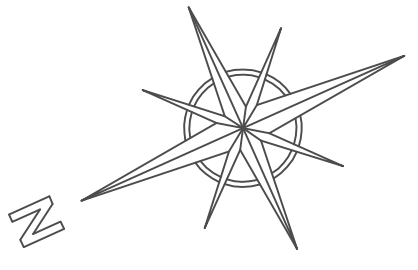

B2:1.22.: Landscaping amended, pavers added BK
 A:9.12.21.: Gates set further back & gates and hedge amended BK

Proposed extension & alterations to:
 Hedge House
 Main Road
 Hurdleby
 Spilsby

Entrance gate details

 <p>Bella King Design Architectural Design</p>	
<p>218 Burgh Road, Skegness Lincolnshire PE25 2LQ, Tel: 07887 950292</p>	
Date	December 2021
Drawn by	BK
Scale	1:100 @A3
Checked by	
Drawing no.	4594-05
Revision	B

DO NOT SCALE. ALL DIMENSIONS TO BE CHECKED ON SITE. DISCREPANCIES MUST BE REPORTED. DETAILS ON THIS DRAWING ARE COPYRIGHT OF BELLA KING DESIGN LTD. THESE ARE CONFIDENTIAL DOCUMENTS AND MUST NOT BE COPIED, USED OR DIVULGED IN ANY WAY WITHOUT PRIOR WRITTEN CONSENT.