

This drawing is the copyright of Kulsham Engineering Ltd. It must not be copied or reproduced or used in any way without written permission from Kulsham Engineering Ltd.

NOTES:

- GENERAL:**
1. All dimensions to be used in conjunction with all relevant drawings and schedules.
 2. All dimensions in millimeters & to be checked on site prior to commencement.
 3. Builder to verify all dimensions, heights & levels prior to commencement of work. No encroachment into neighbours property.
 4. All works to be in accordance with the Building Regulations and approved by the Local Authority.
 5. The Contractor is responsible for ensuring the stability of the existing and associated works relating existing structures throughout the construction.
 6. The contractor is responsible for all temporary works through out the project.
 7. The Contractor must bring to the attention of Design Coordinator if any notes on drawings, or any conditions with the design drawings or specifications, before any work commences.
 8. All the materials should be fixed as per manufacturer's guidelines/instructions.

STRUCTURAL STEELWORK

9. All steelwork to be S355 unless noted otherwise. All steelwork to comply with BS 5950.
10. All bolts and washers to be galvanneal to BS3774. All bolts to be Grade 8.8 bolts unless noted otherwise in accordance with:
BS 4000 for HSTC Bolts
BS 4000 for HSTC Bars
11. All welds to be minimum 6mm fillet welds and to be made in accordance with BS EN 288.

GROUND WORKS:

12. If a suitable bearing stratum is not obtainable at the levels shown on the drawings, excavations shall be continued as directed, to a suitable bearing stratum and the additional excavations made up in concrete.
13. Foundations for the structure shall be kept free of water. The foundation concrete shall be placed without delay following excavations to formation levels and approval of the bearing stratum.
14. Use as necessary, earthwork supports to sides of excavations where access for construction workers is required and remove on completion unless otherwise instructed.

CONCRETE WORKS:

15. Concrete to be Grade C28/35 UNO.
16. Completion of concrete shall be by means of mechanical Vibrators/Strainers.

Rev.	By	Date	Authorised
R1	KK	21/04/2024	KK
KK	KK		

Drawn Comments:
By: Authorised

THIS DRAWING ORIGINATED IN THE FOLLOWING OFFICE:
KULSHAM ENGINEERING LTD
DESIGN AND CONSULTANTS
14, ASHBY STREET, LONDON, SEVENOAKS, UK
TEL: 01892 621500


Client:
MR. SIVAJOTI SRIKANDA
114 INGRAVE ROAD
BRENTWOOD
CM13 2AQ

Project:
LOFT CONVERSION
CONVERT THE GARAGE INTO HABITABLE PLACE
AND A FRONT PORCH


TITLE:
BLOCK PLAN

Scale: 1:500 @ A3
Drawing number: KSEL/RE/P187/06
Rev: R1

EXISTING SITE PLAN
SCALE:- 1:500

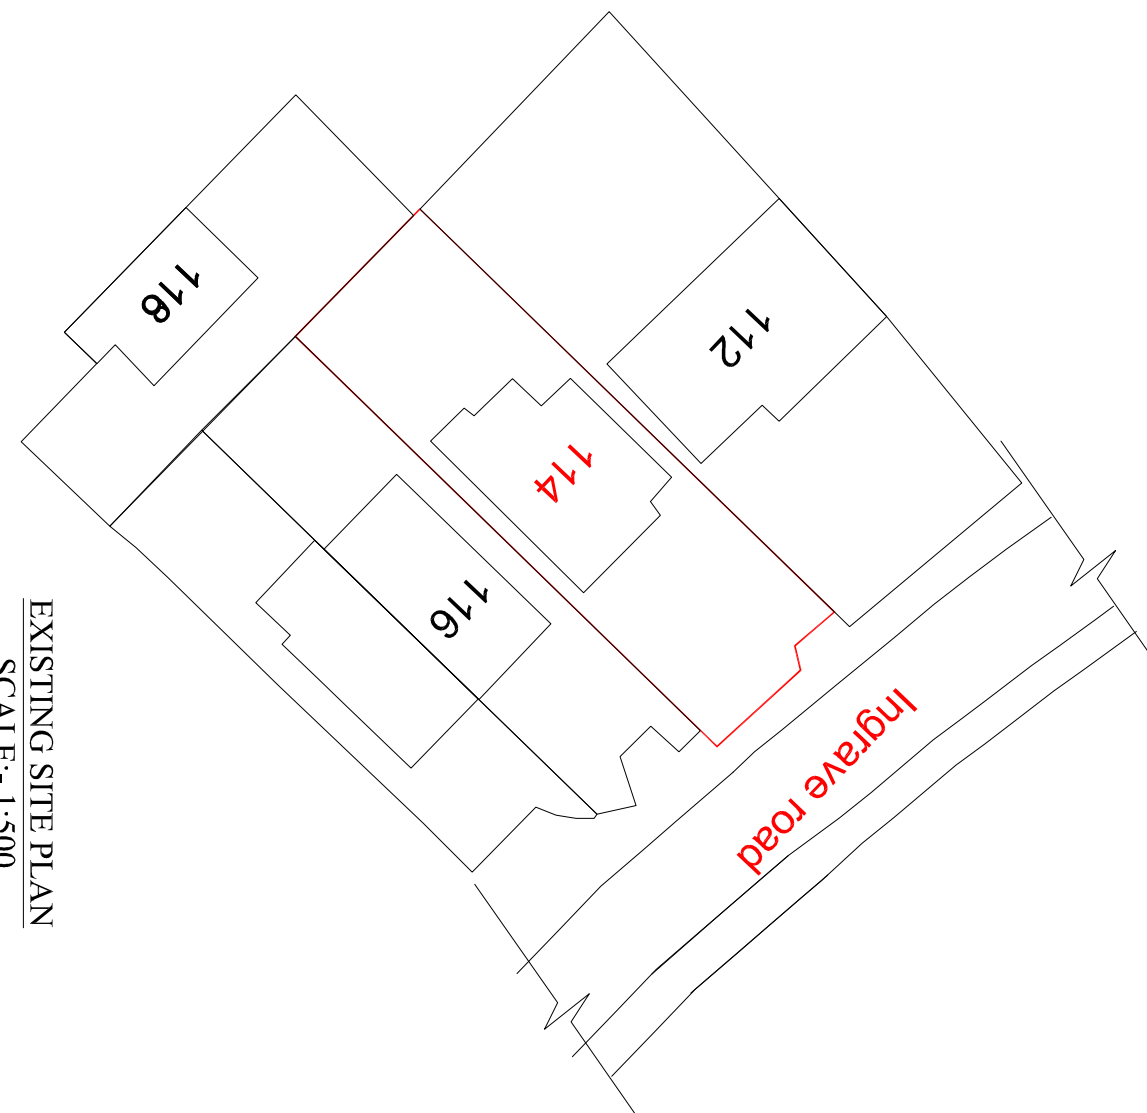

PROPOSED SITE PLAN
SCALE:- 1:500

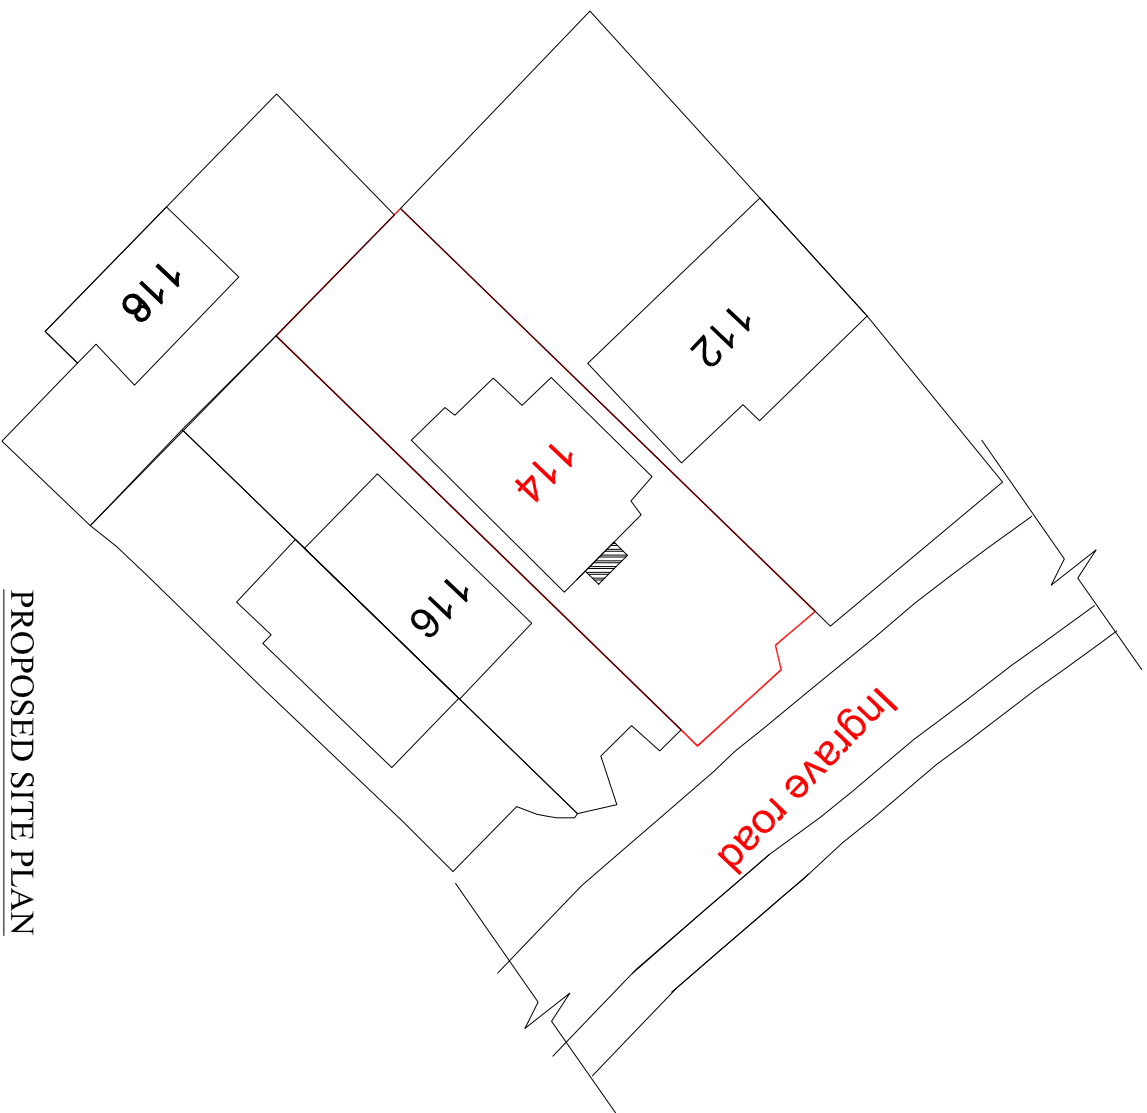

SCALE - 1:500@A3

