




Outbuilding to be demolished as part of proposed works




Example condition of Chimney

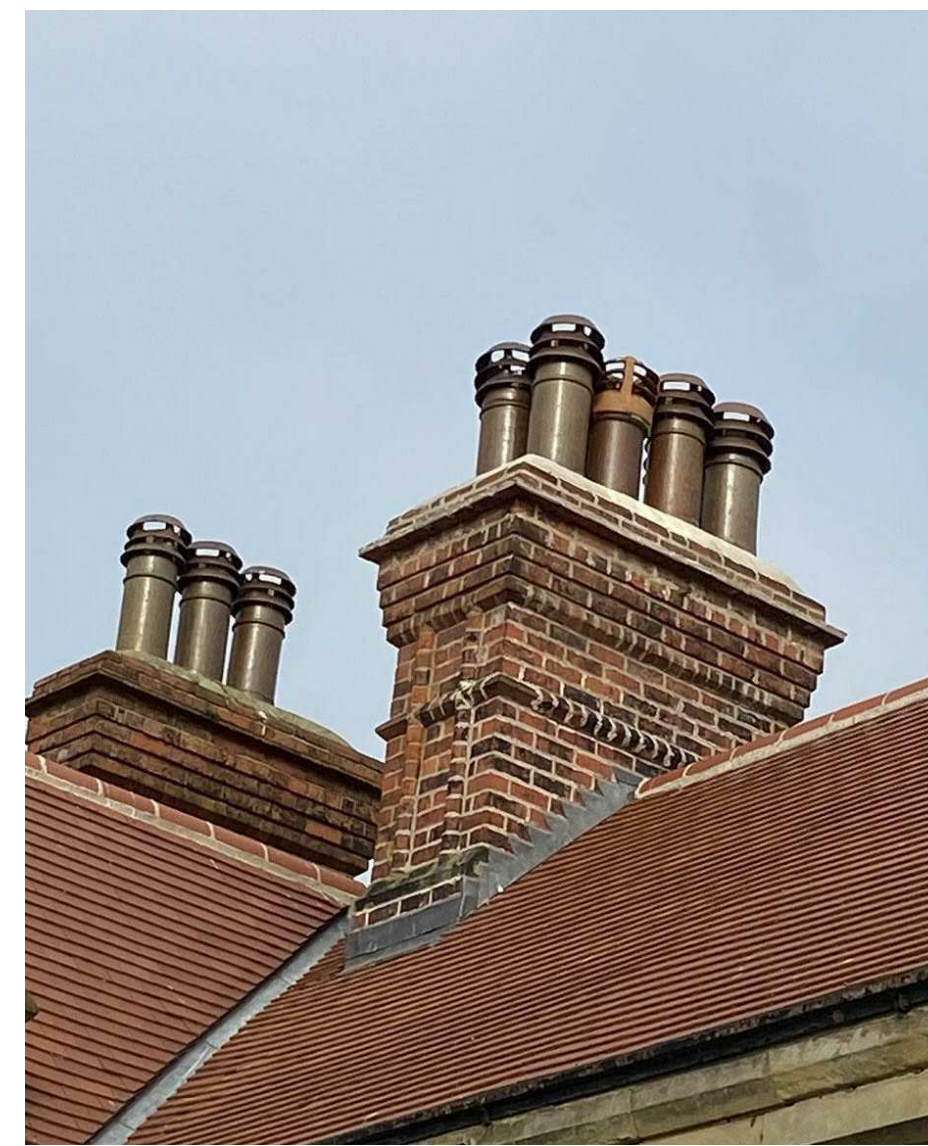

Example of General Masonry Condition



Example of Window and Stone Surround Condition

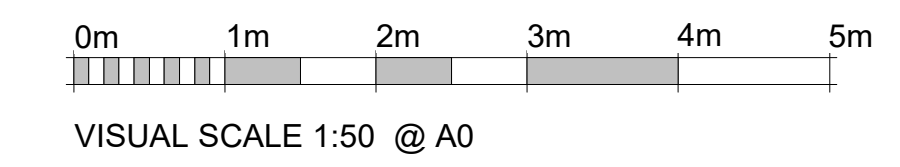


Do not scale from this drawing. The contractor is to check all dimensions on site and report any discrepancies to the architect. All notes described in chapter 10 of the contract, design and program 1998 have been generally assumed.

- Demolition Key**
- Clean / Repair
Doff clean existing brickwork. Replace any individual damaged bricks with new. Bake out all existing pointing and re-point.
 - Removal of Finish
Remove existing black paint using chemical stripper with TORC cleaning system.
 - Assess Area of Masonry for Replacement
 - Remove and Replace
Remove existing brick, stone, door/ window/ gutter/ RWP and replace with new.
 - To be removed cleaned / resored as necessary and repositioned
 - Roof to Buildings 1 & 2 Only
Remove existing timber battens and sarking felt and replace with new. Remove existing roof tiles (replace any damaged with new), clean and replace.


Important Note
Where TORC cleaning specified, Cleaning Specialist to advise on level/ type of abrasive to be used in mix. Sand-blasting is not to be used.

Important Note
This drawing graphically identifies areas of demolition and repairs and describes works to be undertaken. Principal Contractor and Architect to agree and mark-up on-site individual brickwork / stonework to be cut-out and replaced.

- Note**
Drawing to be read in conjunction with Maddison James Associates Drawings & Reports
- Proposed Stone Repairs R22032-100
 - Proposed Stone Repairs R22032-101
 - Elevations R22032-102
 - Window Report R22032/RJM
 - Heritage Statement R22032/RJM

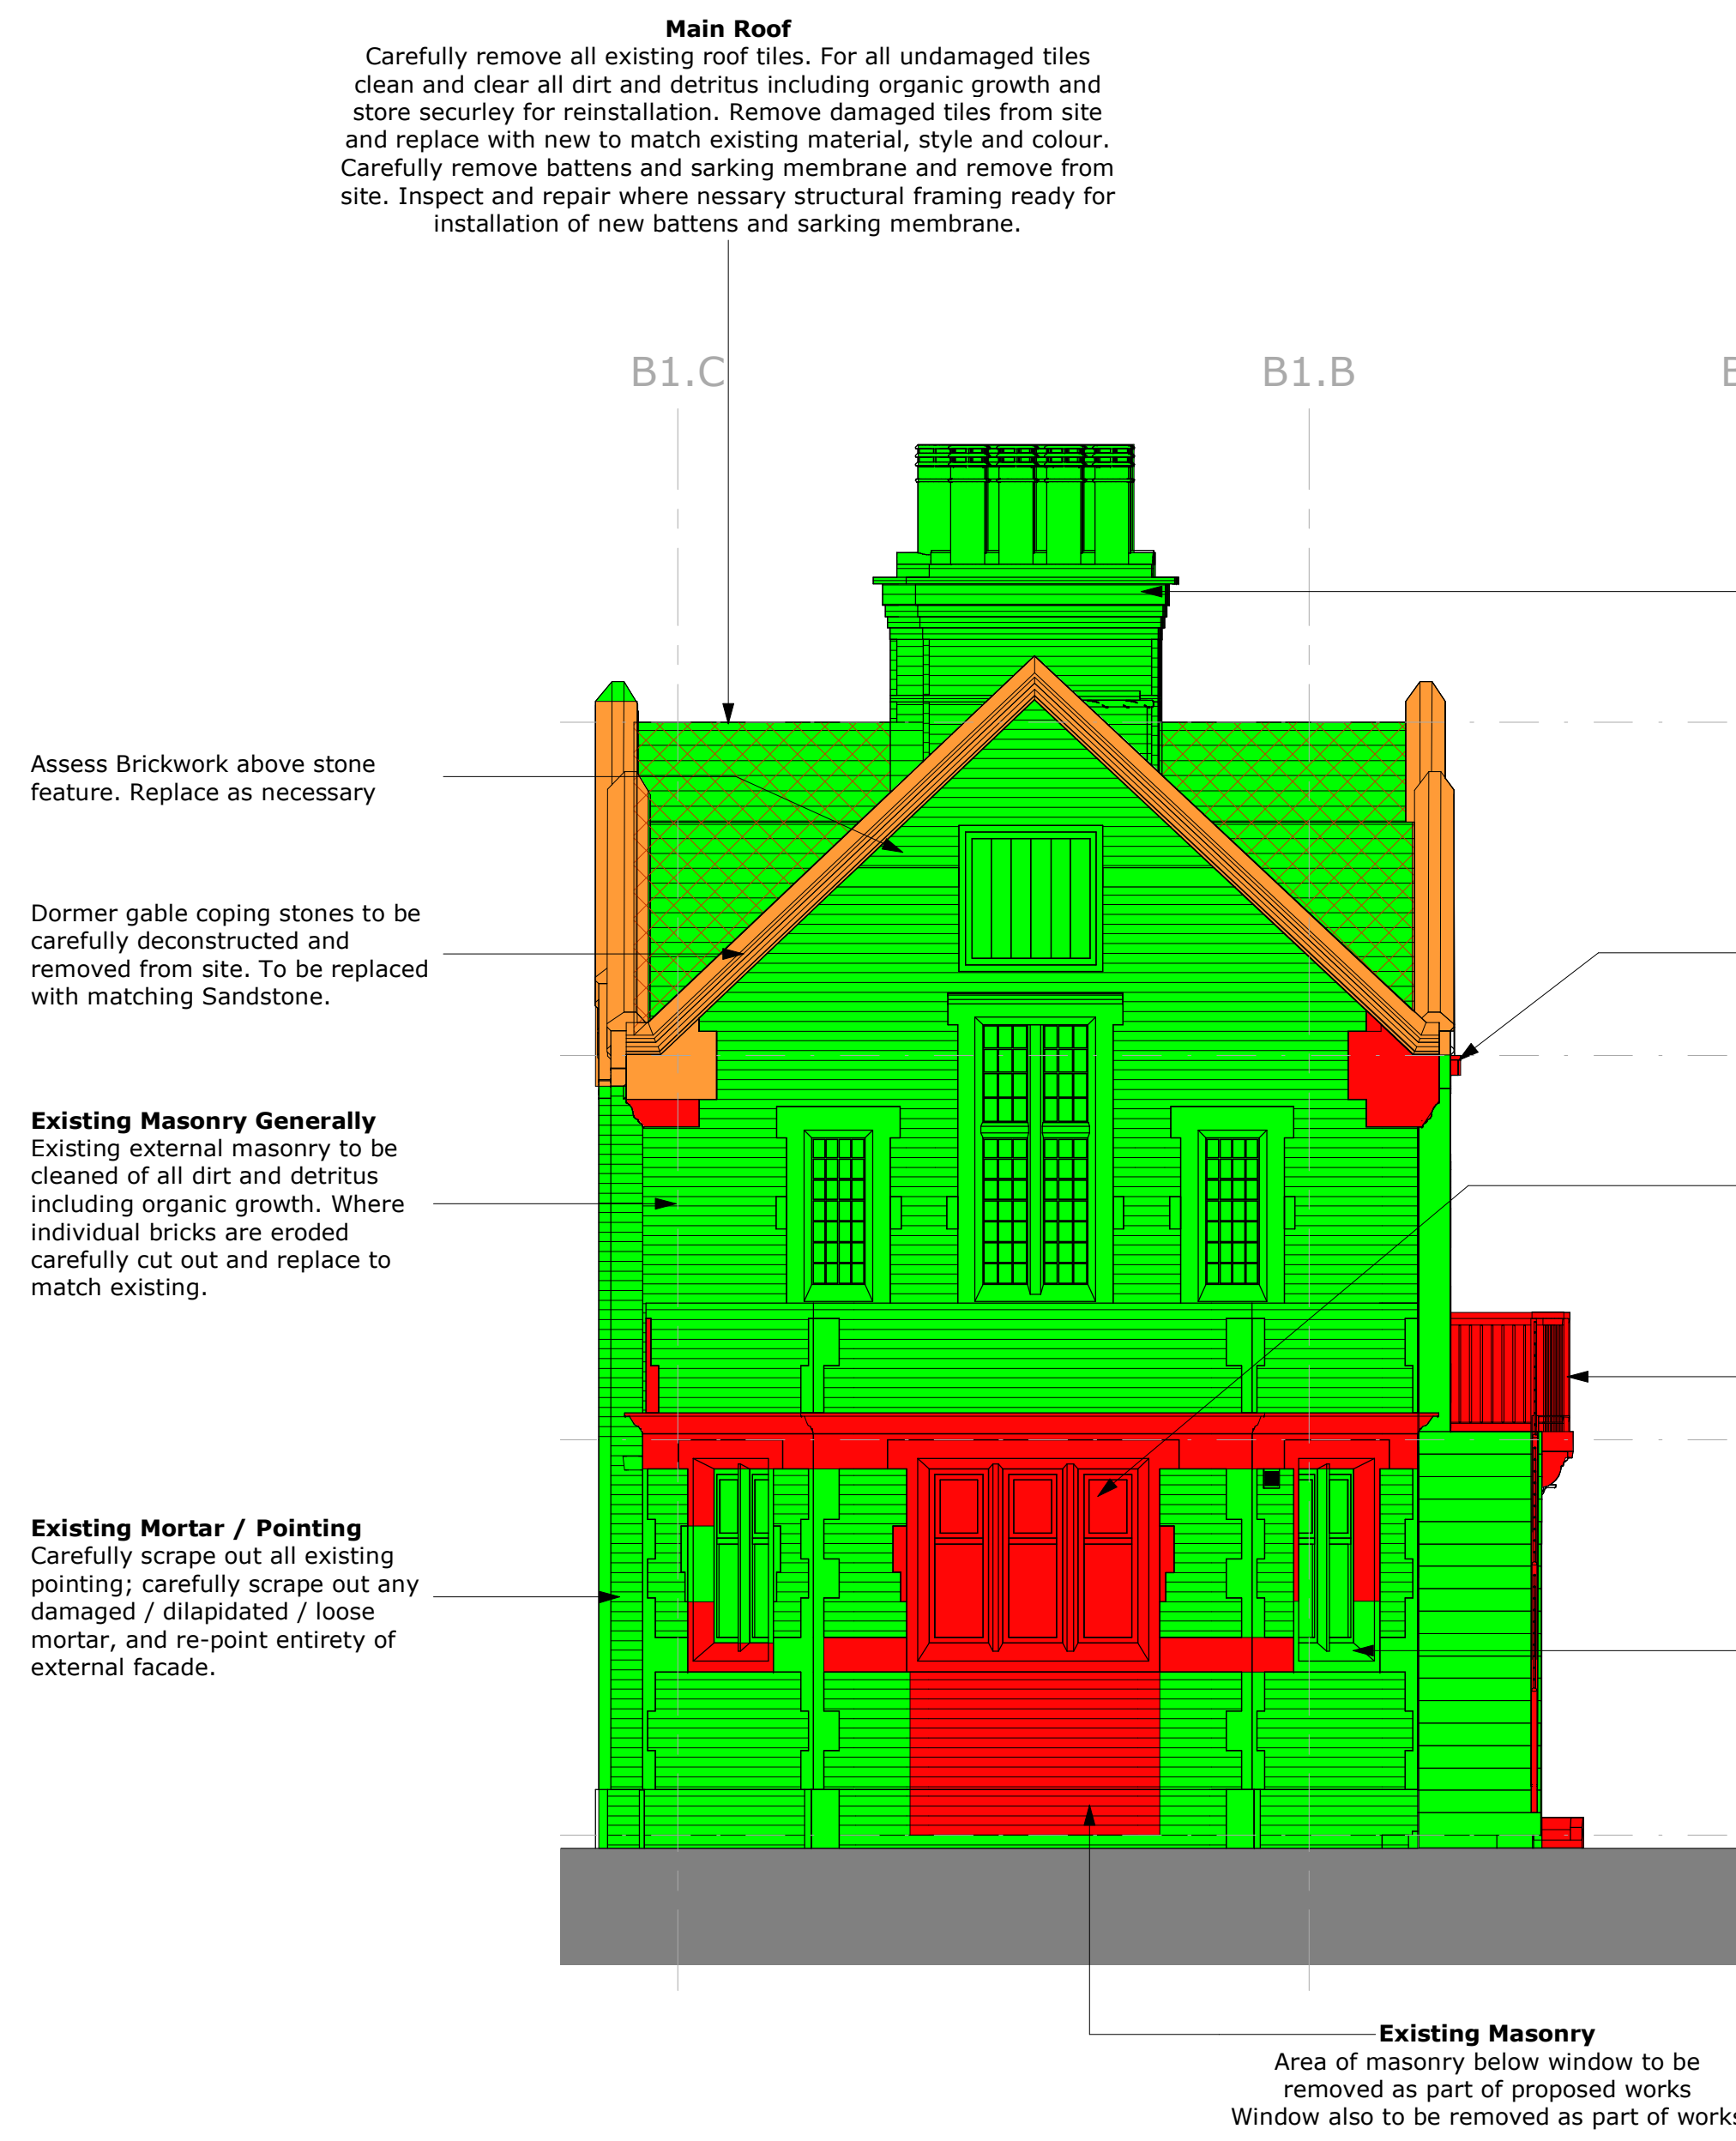

3 Building 1 - Proposed Side (North-West) Demolition Elevation
SCALE: 1 : 50

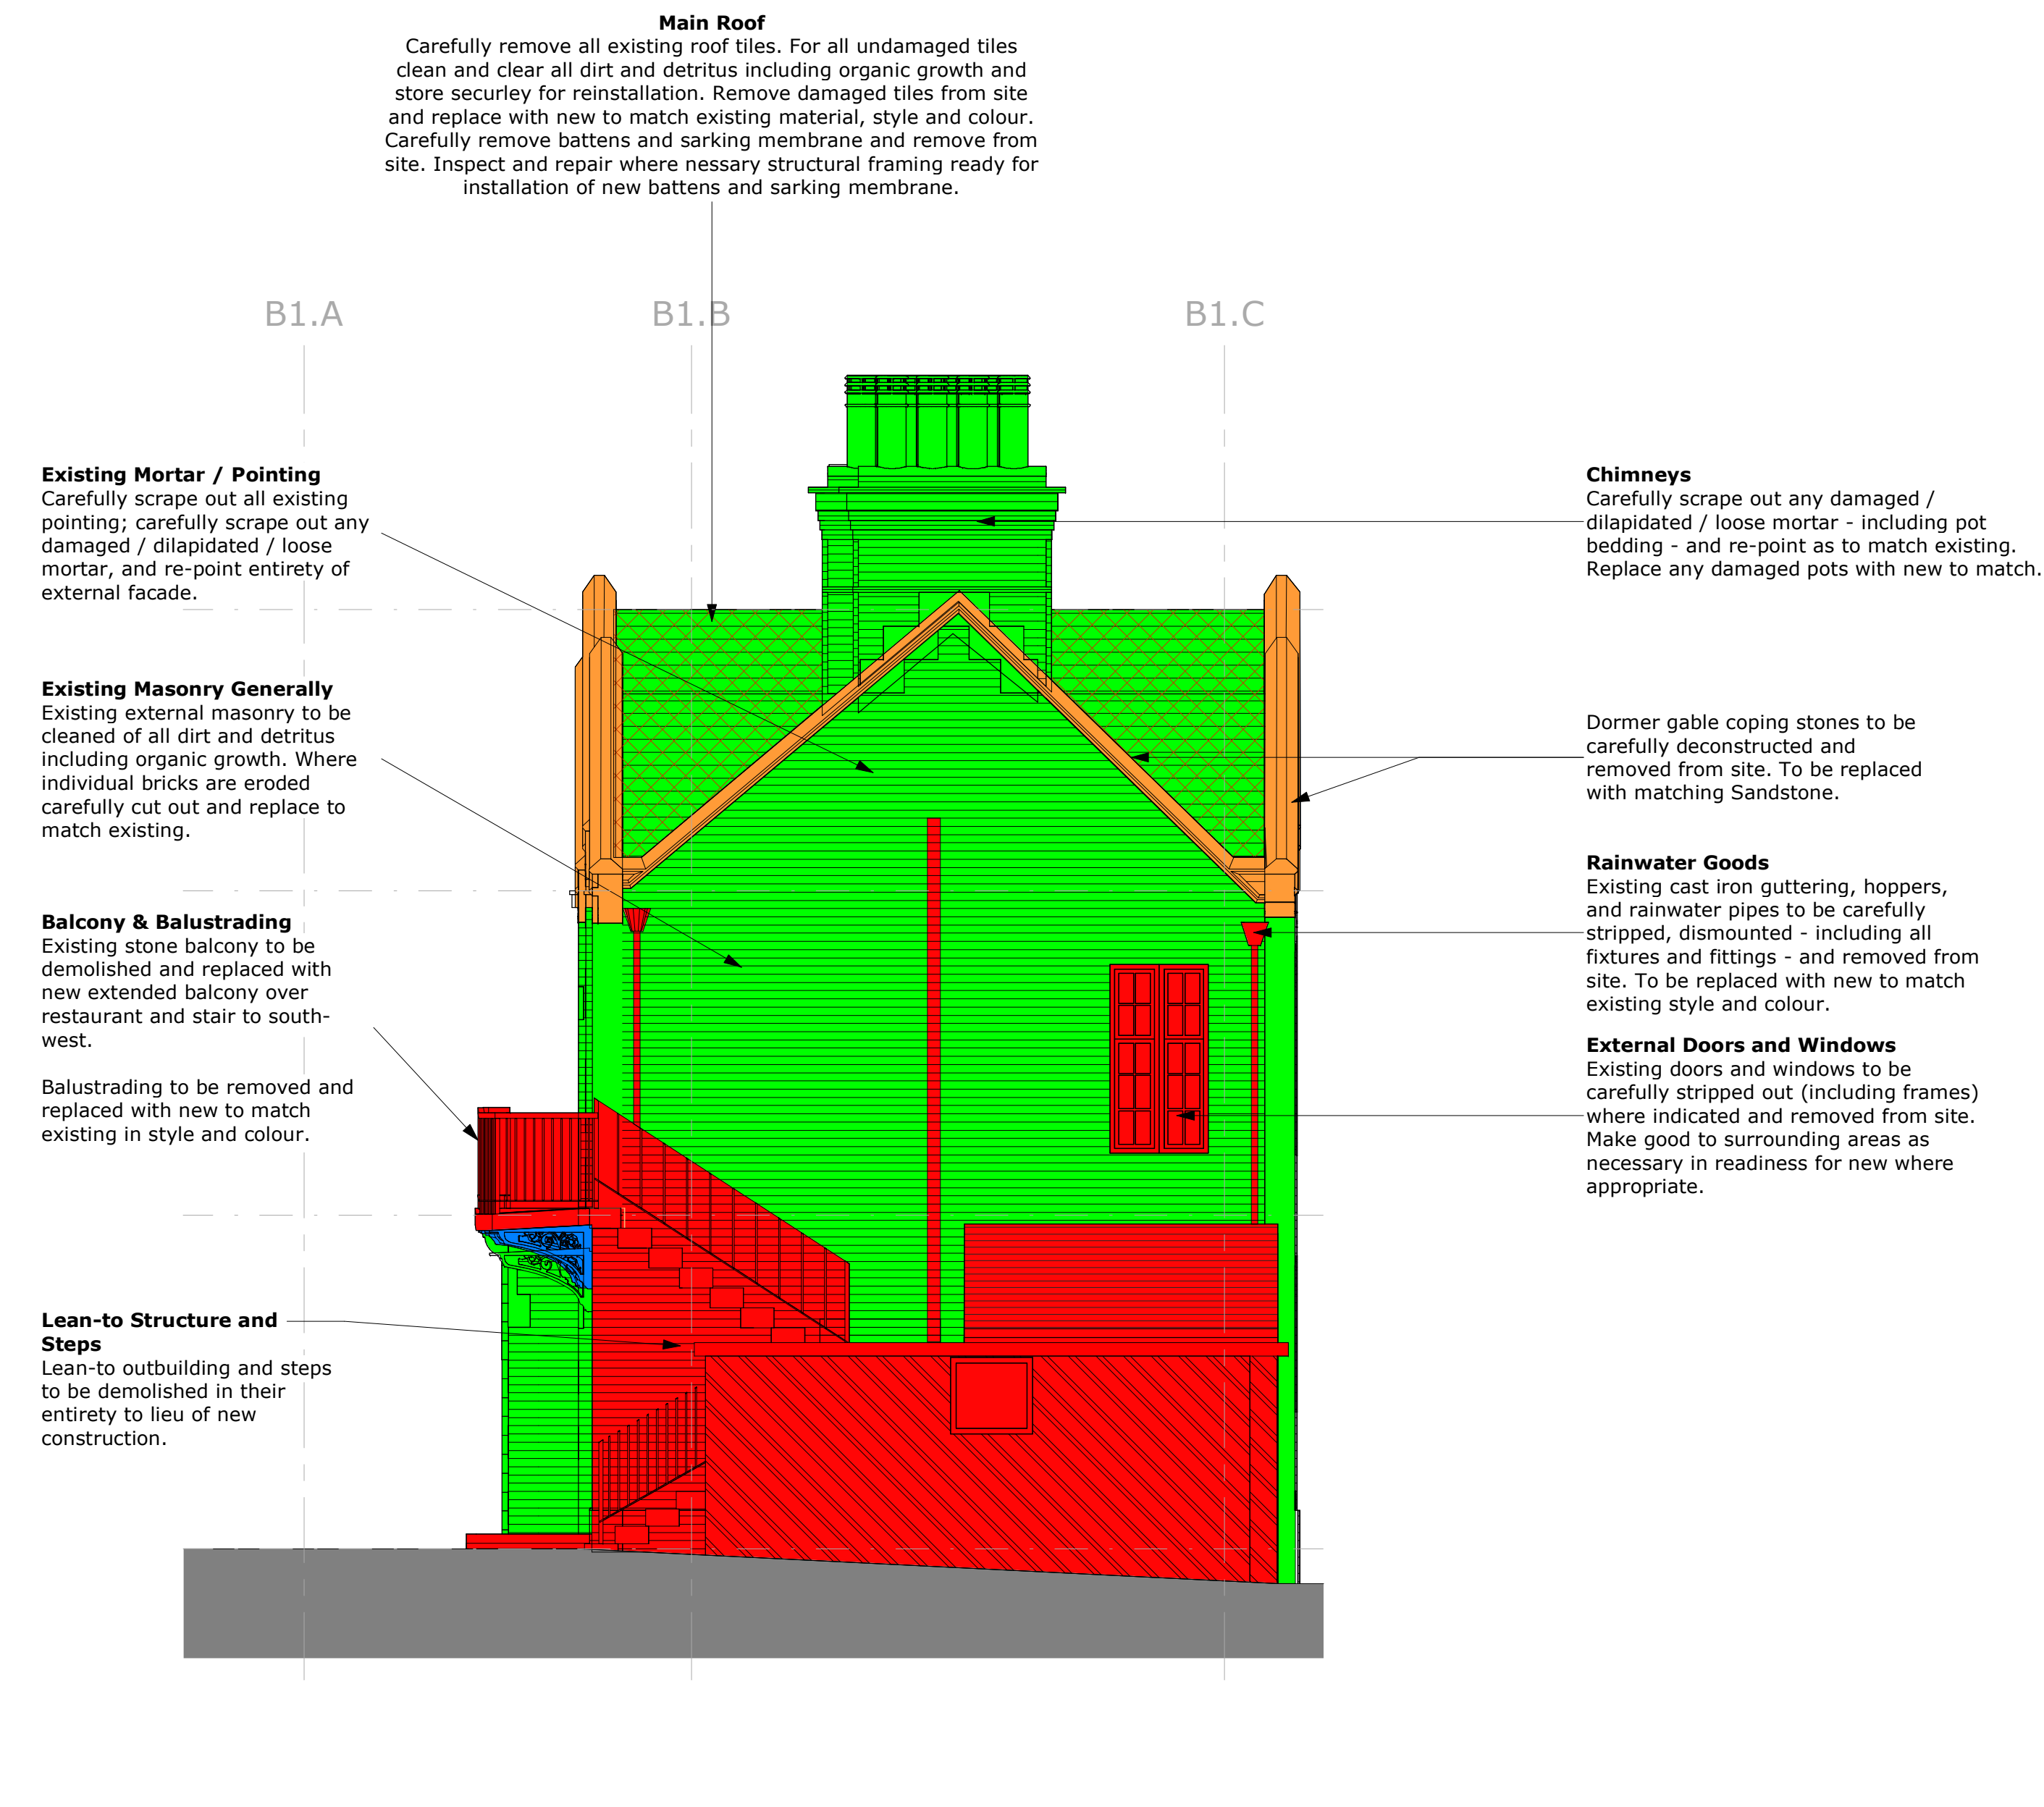

4 Building 1 - Proposed Side (South-East) Demolition Elevation
SCALE: 1 : 50

Demolition and Replacement Notes:


- Main Roof**
Carefully remove all existing roof tiles. For all undamaged tiles clean and clear all dirt and detritus including organic growth and store securely for reinstallation. Remove damaged tiles from site and replace with new to match existing material, style and colour. Carefully remove battens and sarking membrane and remove from site. Inspect and repair where necessary structural framing ready for installation of new battens and sarking membrane.
- Chimneys**
Carefully scrape out any damaged / dilapidated / loose mortar - including pot bedding - and re-point as to match existing. Replace any damaged pots with new to match.
- Gable Stone Copings**
Dormer gable coping stones to be carefully deconstructed and removed from site. To be replaced with matching Sandstone.
- Lead Flashings**
Existing lead flashings to gables, dormers, and chimneys to be carefully stripped out and removed from site. Prepare existing brickwork/point for installation of new lead flashings.
- Rainwater Goods**
Existing cast iron guttering, hoppers, and rainwater pipes to be carefully stripped, dismantled - including all fixtures and fittings - and removed from site. To be replaced with new to match existing style and colour.
- External Masonry (incl. brick specials beneath guttering)**
Existing external masonry to be cleaned of all dirt and detritus including organic growth. Where bricks are eroded carefully cut out and remove from site. To be replaced with new to match existing material, style and colour.
- Walls**
Walls to be checked by Structural Engineer and Principal Contractor before works begin to agree areas for replacement in accordance with MCA Condition Report.
- Balcony**
Existing stone balcony to be demolished and replaced with new extended balcony over restaurant and stair to south-west. Stone stair to north-west to be left in-situ, cleaned using Doff cleaning system, and replaced only where necessary.
Balings to both to be removed and replaced with new to match existing in style and colour.

- Existing Mortar / Pointing**
Carefully scrape out all existing pointing; carefully scrape out any damaged / dilapidated / loose mortar, and re-point entirety of external facade.
- External Doors and Windows - First Floor**
Existing doors and windows to be carefully stripped out (including frames) where indicated and removed from site. Make good to surrounding areas as necessary in readiness for new where appropriate.
- First Floor**
Existing floor finishes (where present) to be stripped out and removed from site. Remaining surface prepared to receive either:
- New walls where indicated on proposed drawings.
- No new finishes. To remain as existing where indicated on proposed drawings.
- Internal Walls**
Existing internal partitions/walls to be carefully demolished where indicated and removed from site. Heritage walls to remain in-situ and incorporated into new layout.
- Internal Ceilings**
Existing ceilings to be carefully stripped out where indicated and removed from site. Heritage ceilings to remain in-situ.
- Internal Skirtings, Covings, Trims, Finishes**
Existing internal skirtings, covings, trims, and finishes to be carefully stripped out where indicated and removed from site. Heritage items to remain in-situ and incorporated into new layout.
- External Doors and Windows**
Existing external doors to be removed where indicated and removed from site. Make good to surrounding areas as necessary in readiness for new doors where appropriate.

- Cupboards / Worktops / Shelving**
Existing cupboards and worktops highlighted to be carefully stripped out and removed from site.
- Equipment**
All existing tools and equipment (including mechanical / electronic) to be returned to the Client.
- Furniture**
All existing furniture to be cleared from all areas but to remain on site unless authorised otherwise by the Client. All areas to remain empty to receive new furniture.
- Sanitary Appliances**
All existing sanitary appliances, fixtures, fittings, roller towels and paper towel dispensers to be dismantled and removed from site.
Where being replaced by new, all pipework to be stripped back to entry point and covered.
Where no replacement proposed, all pipework stripped back to entry point at minimum - further to avoid dead legging of incoming services - and entry point sealed over.
- Structural**
See Structural Engineer's information

General Notes:

- The removal of all debris and redundant material arising is to be separated and screened in accordance with all relevant and current health and safety, noise of practice and CDM regulations and legislation. The Principal Contractor is to:
- Provide all relevant health and safety, security and co-ordinate contractors signage as may be required.
 - All Operatives and Consultants must fully acquaint themselves with all aspects of the work, whether explicitly referred to in the drawings or not. The Principal Contractor must also identify themselves as to the facilities for access and storage of materials, plant, etc., and other site conditions.
 - Provide all relevant health and safety, security and Co-ordinate contractors SIGNAGE as may be required.
- ASBESTOS MANAGEMENT SURVEY REPORT**
THE CONTRACTOR IS TO READ THE ASBESTOS MANAGEMENT SURVEY REPORTS BEFORE COMMENCEMENT OF ANY WORKS. SURVEYS:
3014680 - PUBLIC TOILETS (BY INSPECTAS)
3014684 - OFFICE 8 (BY INSPECTAS)
3014683 - OFFICE 10 (BY INSPECTAS)
3014684 - OFFICE 11 (BY INSPECTAS)
3059706 - OFFICE 12 (BY INSPECTAS)
3014624 - OFFICE 14 (BY INSPECTAS)
3014685 - OFFICE 15 (BY INSPECTAS)
- STRUCTURAL NOTES:**
THE STRUCTURAL ENGINEER AND PRINCIPAL CONTRACTOR MUST COMPLETE A FULL STRUCTURAL SURVEY OF THE AFFECTED AREAS IN ORDER TO ASCERTAIN WHICH DEMOLISHED ELEMENTS ARE LOAD-BEARING AND REQUIRE TEMPORARY PROPPING AND/OR PERMANENT SUPPORT.

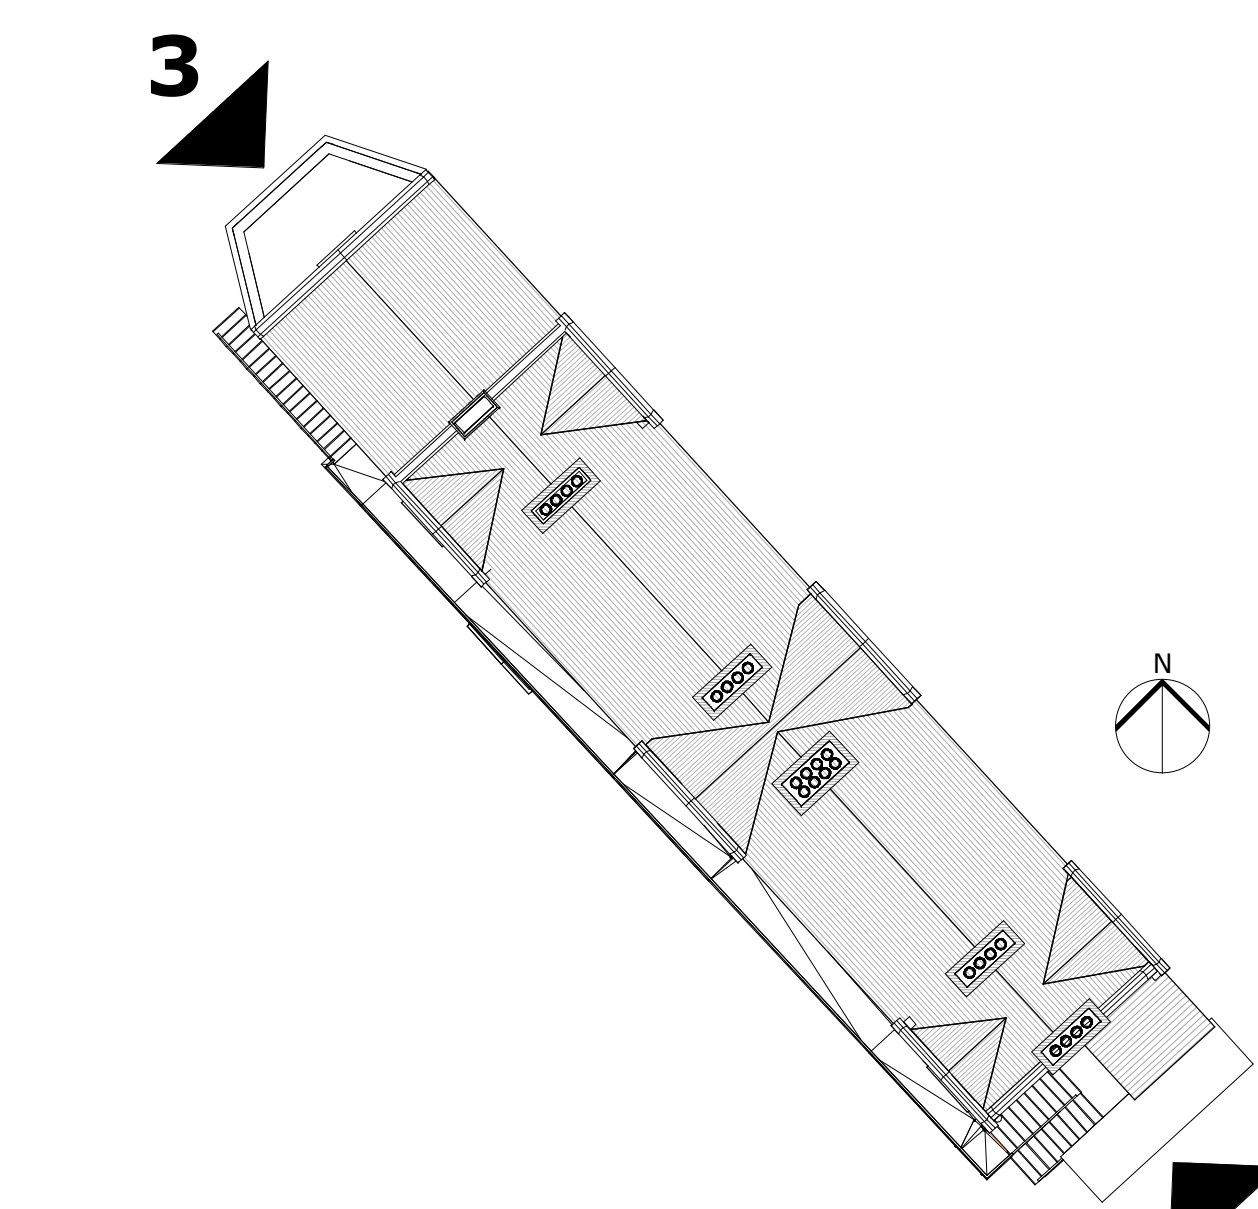

Proposed Side Demolition Elevations Reference Plan
SCALE: 1 : 200

Rev	Description	Date	By	Chk
01	Issued for tender	17/02/23	SB	CA

52 Princess Street
Reddish House
Manchester M15 6JX
Telephone +44(0)161 2375646
Website www.jeffersonsheard.com



Project
Scarborough Harbour West Pier
Regeneration

Drawing
Building 1 - Proposed
Interventions - Gable Elevations

Scale	AS Indicated	Drawn	SB	Date	17/02/23
Drawing Purpose	For Approval	Station	S4		
Ref	2135-JSA-21-ZZ-DR-A-03402	Rev	P5		