

The original of this drawing was produced in colour- a monochrome copy should not be relied upon.



A	18/03/24	Existing hedging removed.	
		Proposed planting and services shown	HEP
Rev	Date	Details	Drawn



ACD ENVIRONMENTAL

HEAD OFFICE
Rodbourne Rail Business Centre, Grange Lane,
Malmesbury, SN16 0ES
Tel: 01666 825646

Unit 7, Godalming Business Centre, Woolsack Way
Godalming, GU7 1XW
Tel: 01483 425714

Suite 6, Crescent House, Yonge Close,
Eastleigh, SO50 9SX
Tel: 02382 026300

email: mail@acdenv.co.uk
www.acdenvironmental.co.uk

Copyright of ACD. All rights described in Chapter IV of the Copyright, Designs and Patents Act 1988 have been generally asserted: 2015. Copyright of this plan remains with ACD until all fees have been paid in full.

scheme: Blackhorse Tower,
Churchwood House and
Holbrook House
116 Cockfosters Road
Enfield

client: Chase New Homes
Limited

drawing: Tree Protection Plan

date: 31/01/2024

scale: 1:250@A3

dwg no: CNH23629 (Boundary)
Sheet 1 of 3

drawn: HEP checked: AJB

Existing hedge along site frontage to be removed.














New planting within RPAs to consist of bare-root stock planting with a low-impact methodology



Sensitive demolition of existing wall and, if required, careful removal of foundation.

New site frontage to incorporate retained foundation where feasible or existing development footprint with no further excavation closer to retained RPAs.

Existing hard surfaces within RPAs to act as ground protection.

LEGEND

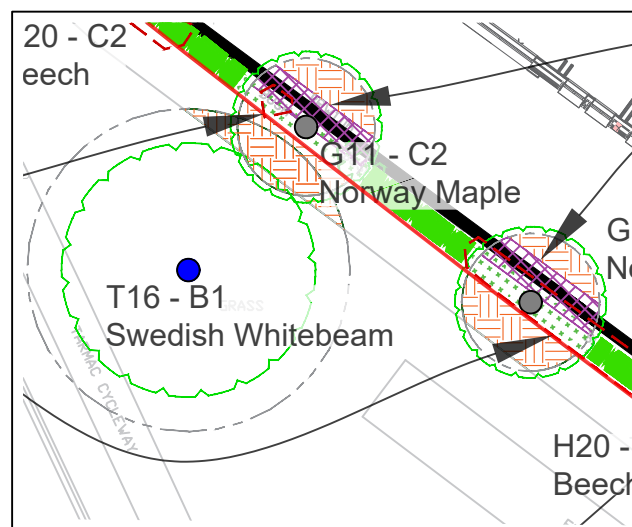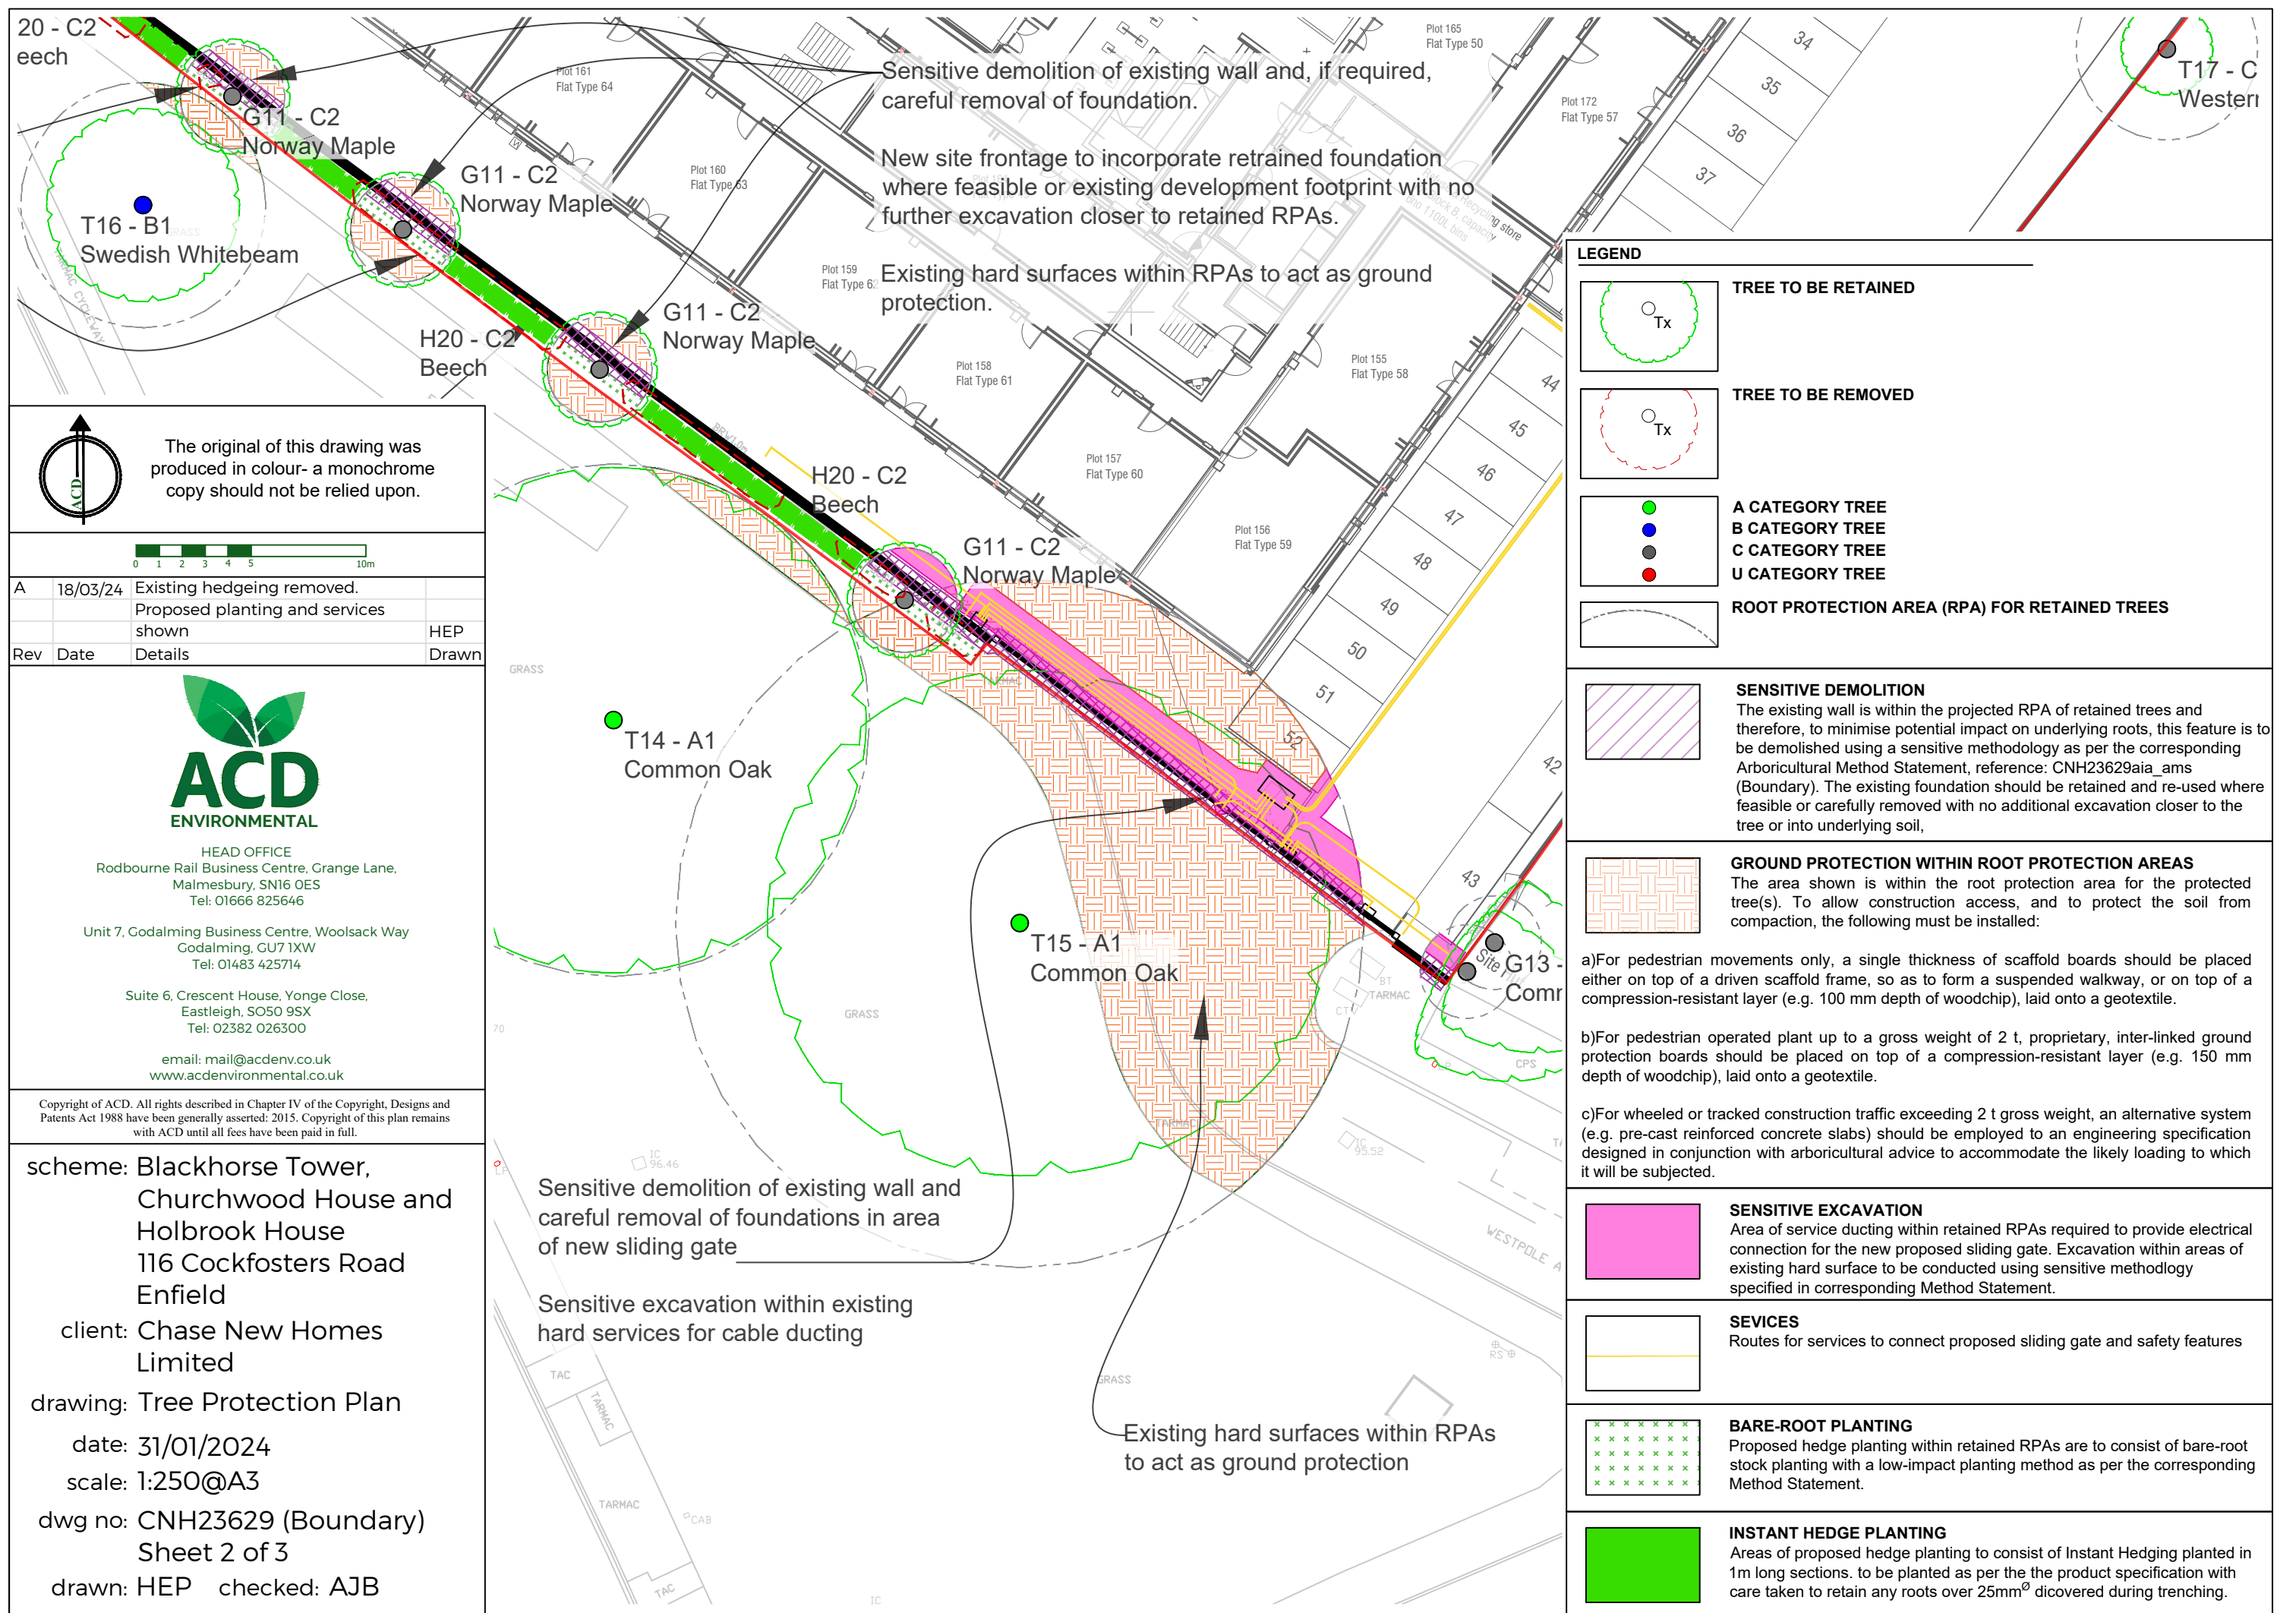-  **TREE TO BE RETAINED**
-  **TREE TO BE REMOVED**
-  **A CATEGORY TREE**
-  **B CATEGORY TREE**
-  **C CATEGORY TREE**
-  **U CATEGORY TREE**
-  **ROOT PROTECTION AREA (RPA) FOR RETAINED TREES**
-  **SENSITIVE DEMOLITION**
The existing wall is within the projected RPA of retained trees and therefore, to minimise potential impact on underlying roots, this feature is to be demolished using a sensitive methodology as per the corresponding Arboricultural Method Statement, reference: CNH23629aia_ams (Boundary). The existing foundation should be retained and re-used where feasible or carefully removed with no additional excavation closer to the tree or into underlying soil,
-  **GROUND PROTECTION WITHIN ROOT PROTECTION AREAS**
The area shown is within the root protection area for the protected tree(s). To allow construction access, and to protect the soil from compaction, the following must be installed:
a) For pedestrian movements only, a single thickness of scaffold boards should be placed either on top of a driven scaffold frame, so as to form a suspended walkway, or on top of a compression-resistant layer (e.g. 100 mm depth of woodchip), laid onto a geotextile.
b) For pedestrian operated plant up to a gross weight of 2 t, proprietary, inter-linked ground protection boards should be placed on top of a compression-resistant layer (e.g. 150 mm depth of woodchip), laid onto a geotextile.
c) For wheeled or tracked construction traffic exceeding 2 t gross weight, an alternative system (e.g. pre-cast reinforced concrete slabs) should be employed to an engineering specification designed in conjunction with arboricultural advice to accommodate the likely loading to which it will be subjected.
-  **SENSITIVE EXCAVATION**
Area of service ducting within retained RPAs required to provide electrical connection for the new proposed sliding gate. Excavation within areas of existing hard surface to be conducted using sensitive methodology specified in corresponding Method Statement.
-  **SERVICES**
Routes for services to connect proposed sliding gate and safety features
-  **BARE-ROOT PLANTING**
Proposed hedge planting within retained RPAs are to consist of bare-root stock planting with a low-impact planting method as per the corresponding Method Statement.
-  **INSTANT HEDGE PLANTING**
Areas of proposed hedge planting to consist of Instant Hedging planted in 1m long sections. to be planted as per the the product specification with care taken to retain any roots over 25mm^Ø discovered during trenching.



ACD
The original of this drawing was produced in colour- a monochrome copy should not be relied upon.



Rev	Date	Details	Drawn
A	18/03/24	Existing hedging removed. Proposed planting and services shown	HEP

ACD ENVIRONMENTAL

HEAD OFFICE
Rodbourne Rail Business Centre, Grange Lane,
Malmesbury, SN16 0ES
Tel: 01666 825646

Unit 7, Godalming Business Centre, Woosack Way
Godalming, GU7 1XW
Tel: 01483 425714

Suite 6, Crescent House, Yonge Close,
Eastleigh, SO50 9SX
Tel: 02382 026300

email: mail@acdenv.co.uk
www.acdenvironmental.co.uk

Copyright of ACD. All rights described in Chapter IV of the Copyright, Designs and Patents Act 1988 have been generally asserted: 2015. Copyright of this plan remains with ACD until all fees have been paid in full.

scheme: Blackhorse Tower,
Churchwood House and
Holbrook House
116 Cockfosters Road
Enfield

client: Chase New Homes
Limited

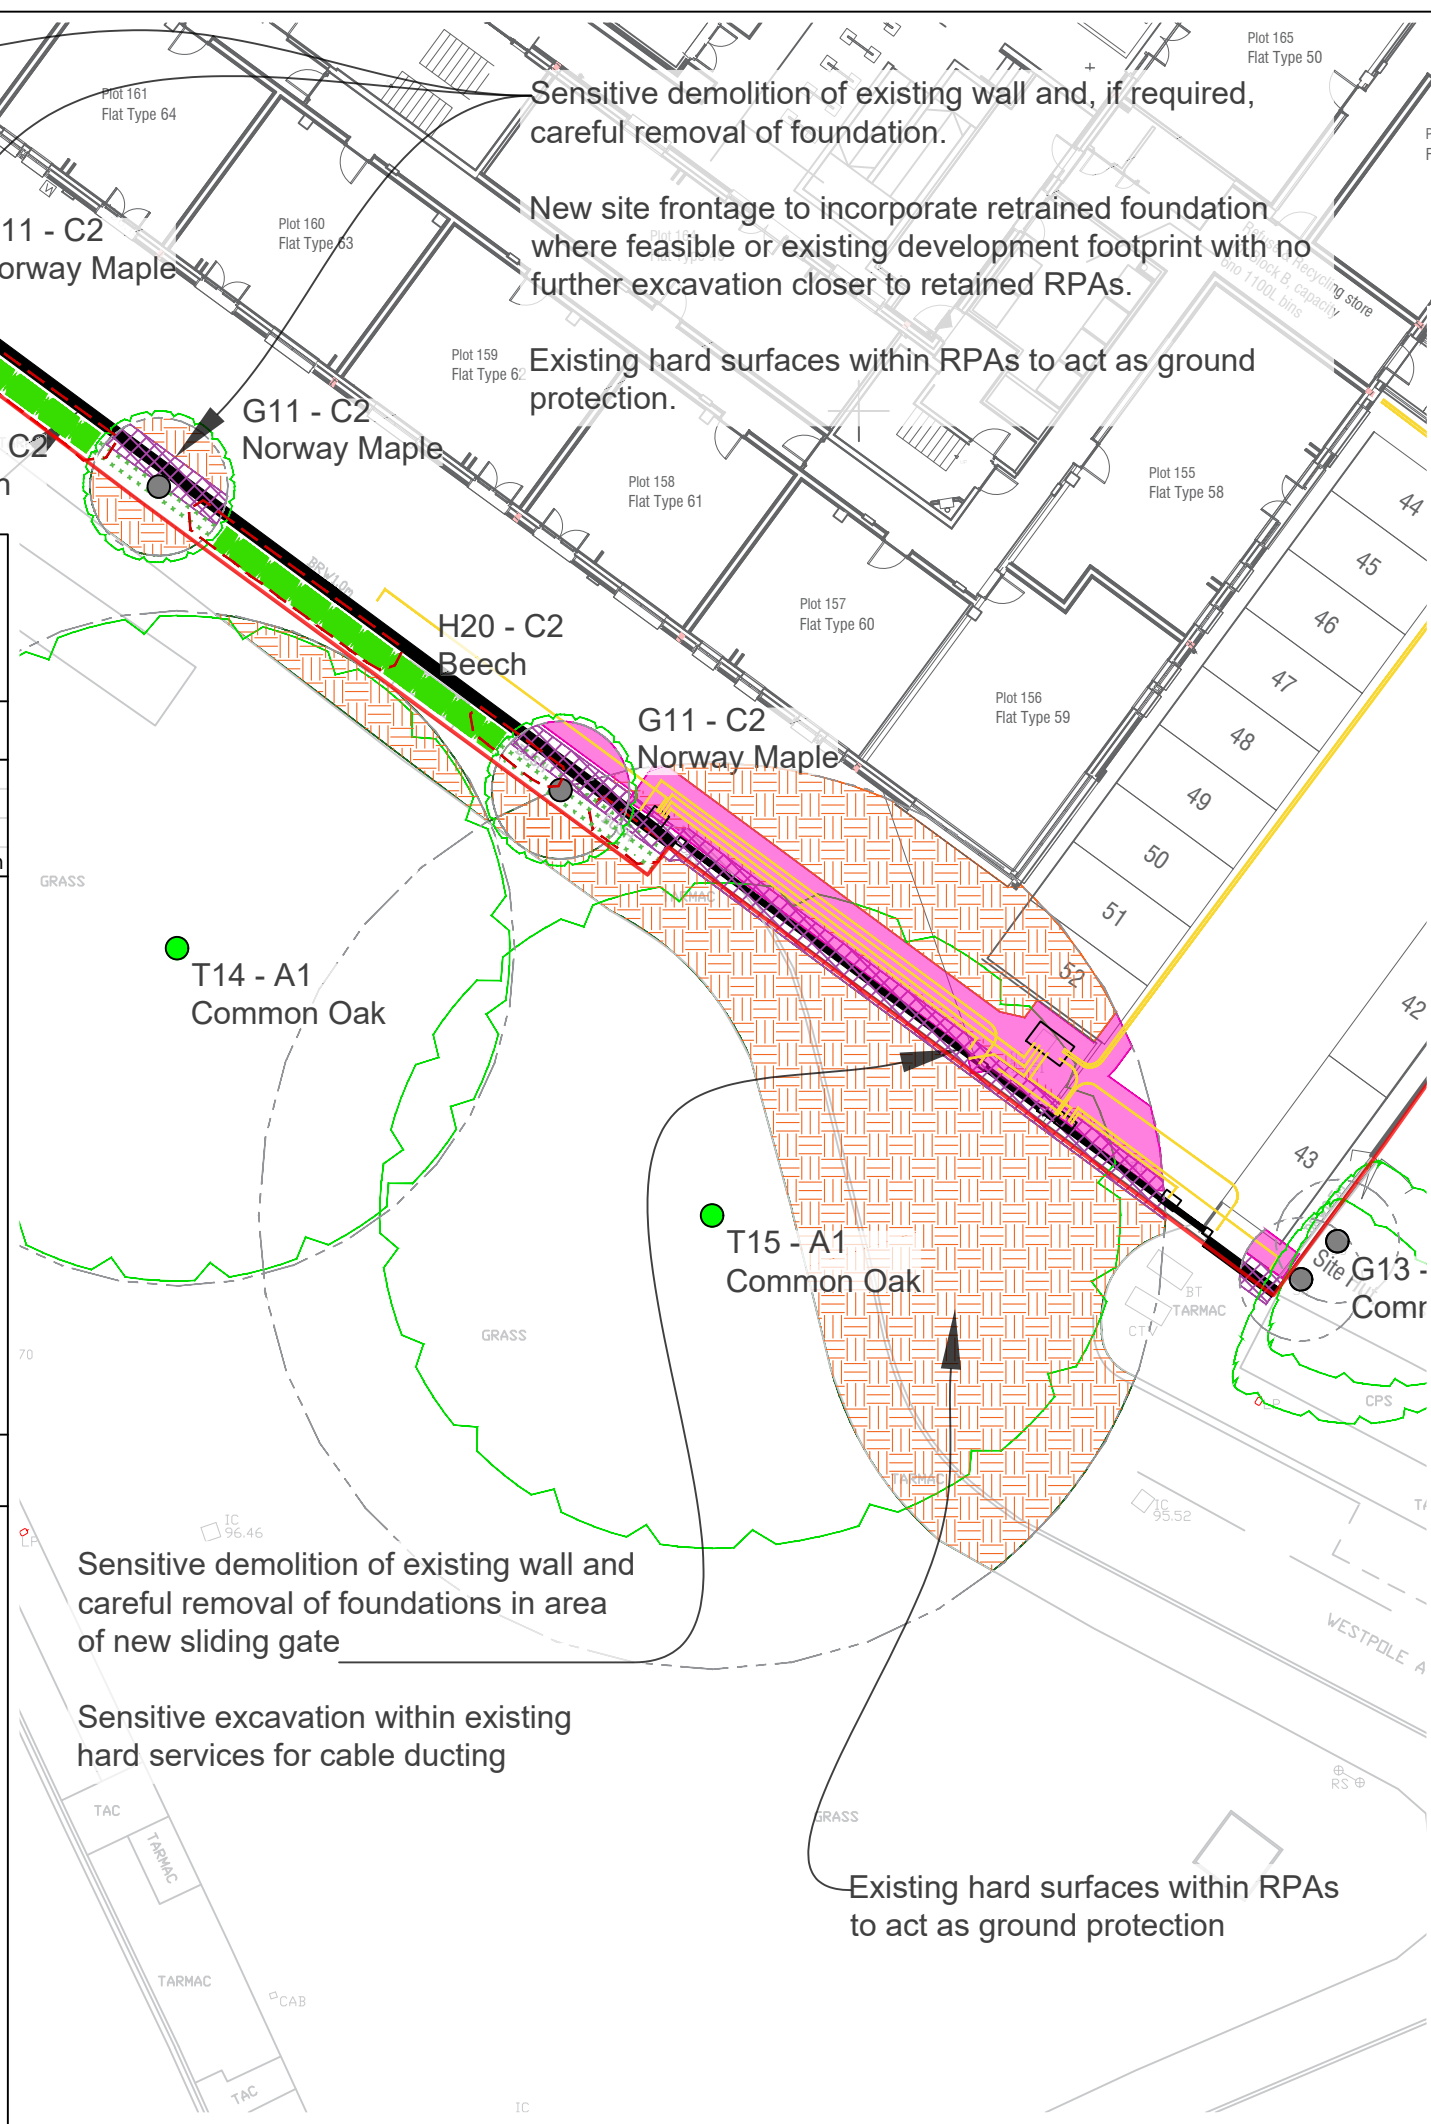
drawing: Tree Protection Plan

date: 31/01/2024

scale: 1:250@A3

dwg no: CNH23629 (Boundary)
Sheet 2 of 3

drawn: HEP checked: AJB



LEGEND

TREE TO BE RETAINED

TREE TO BE REMOVED

A CATEGORY TREE
 B CATEGORY TREE
 C CATEGORY TREE
 U CATEGORY TREE

ROOT PROTECTION AREA (RPA) FOR RETAINED TREES

SENSITIVE DEMOLITION
The existing wall is within the projected RPA of retained trees and therefore, to minimise potential impact on underlying roots, this feature is to be demolished using a sensitive methodology as per the corresponding Arboricultural Method Statement, reference: CNH23629aia_ams (Boundary). The existing foundation should be retained and re-used where feasible or carefully removed with no additional excavation closer to the tree or into underlying soil,

GROUND PROTECTION WITHIN ROOT PROTECTION AREAS
The area shown is within the root protection area for the protected tree(s). To allow construction access, and to protect the soil from compaction, the following must be installed:

a) For pedestrian movements only, a single thickness of scaffold boards should be placed either on top of a driven scaffold frame, so as to form a suspended walkway, or on top of a compression-resistant layer (e.g. 100 mm depth of woodchip), laid onto a geotextile.

b) For pedestrian operated plant up to a gross weight of 2 t, proprietary, inter-linked ground protection boards should be placed on top of a compression-resistant layer (e.g. 150 mm depth of woodchip), laid onto a geotextile.

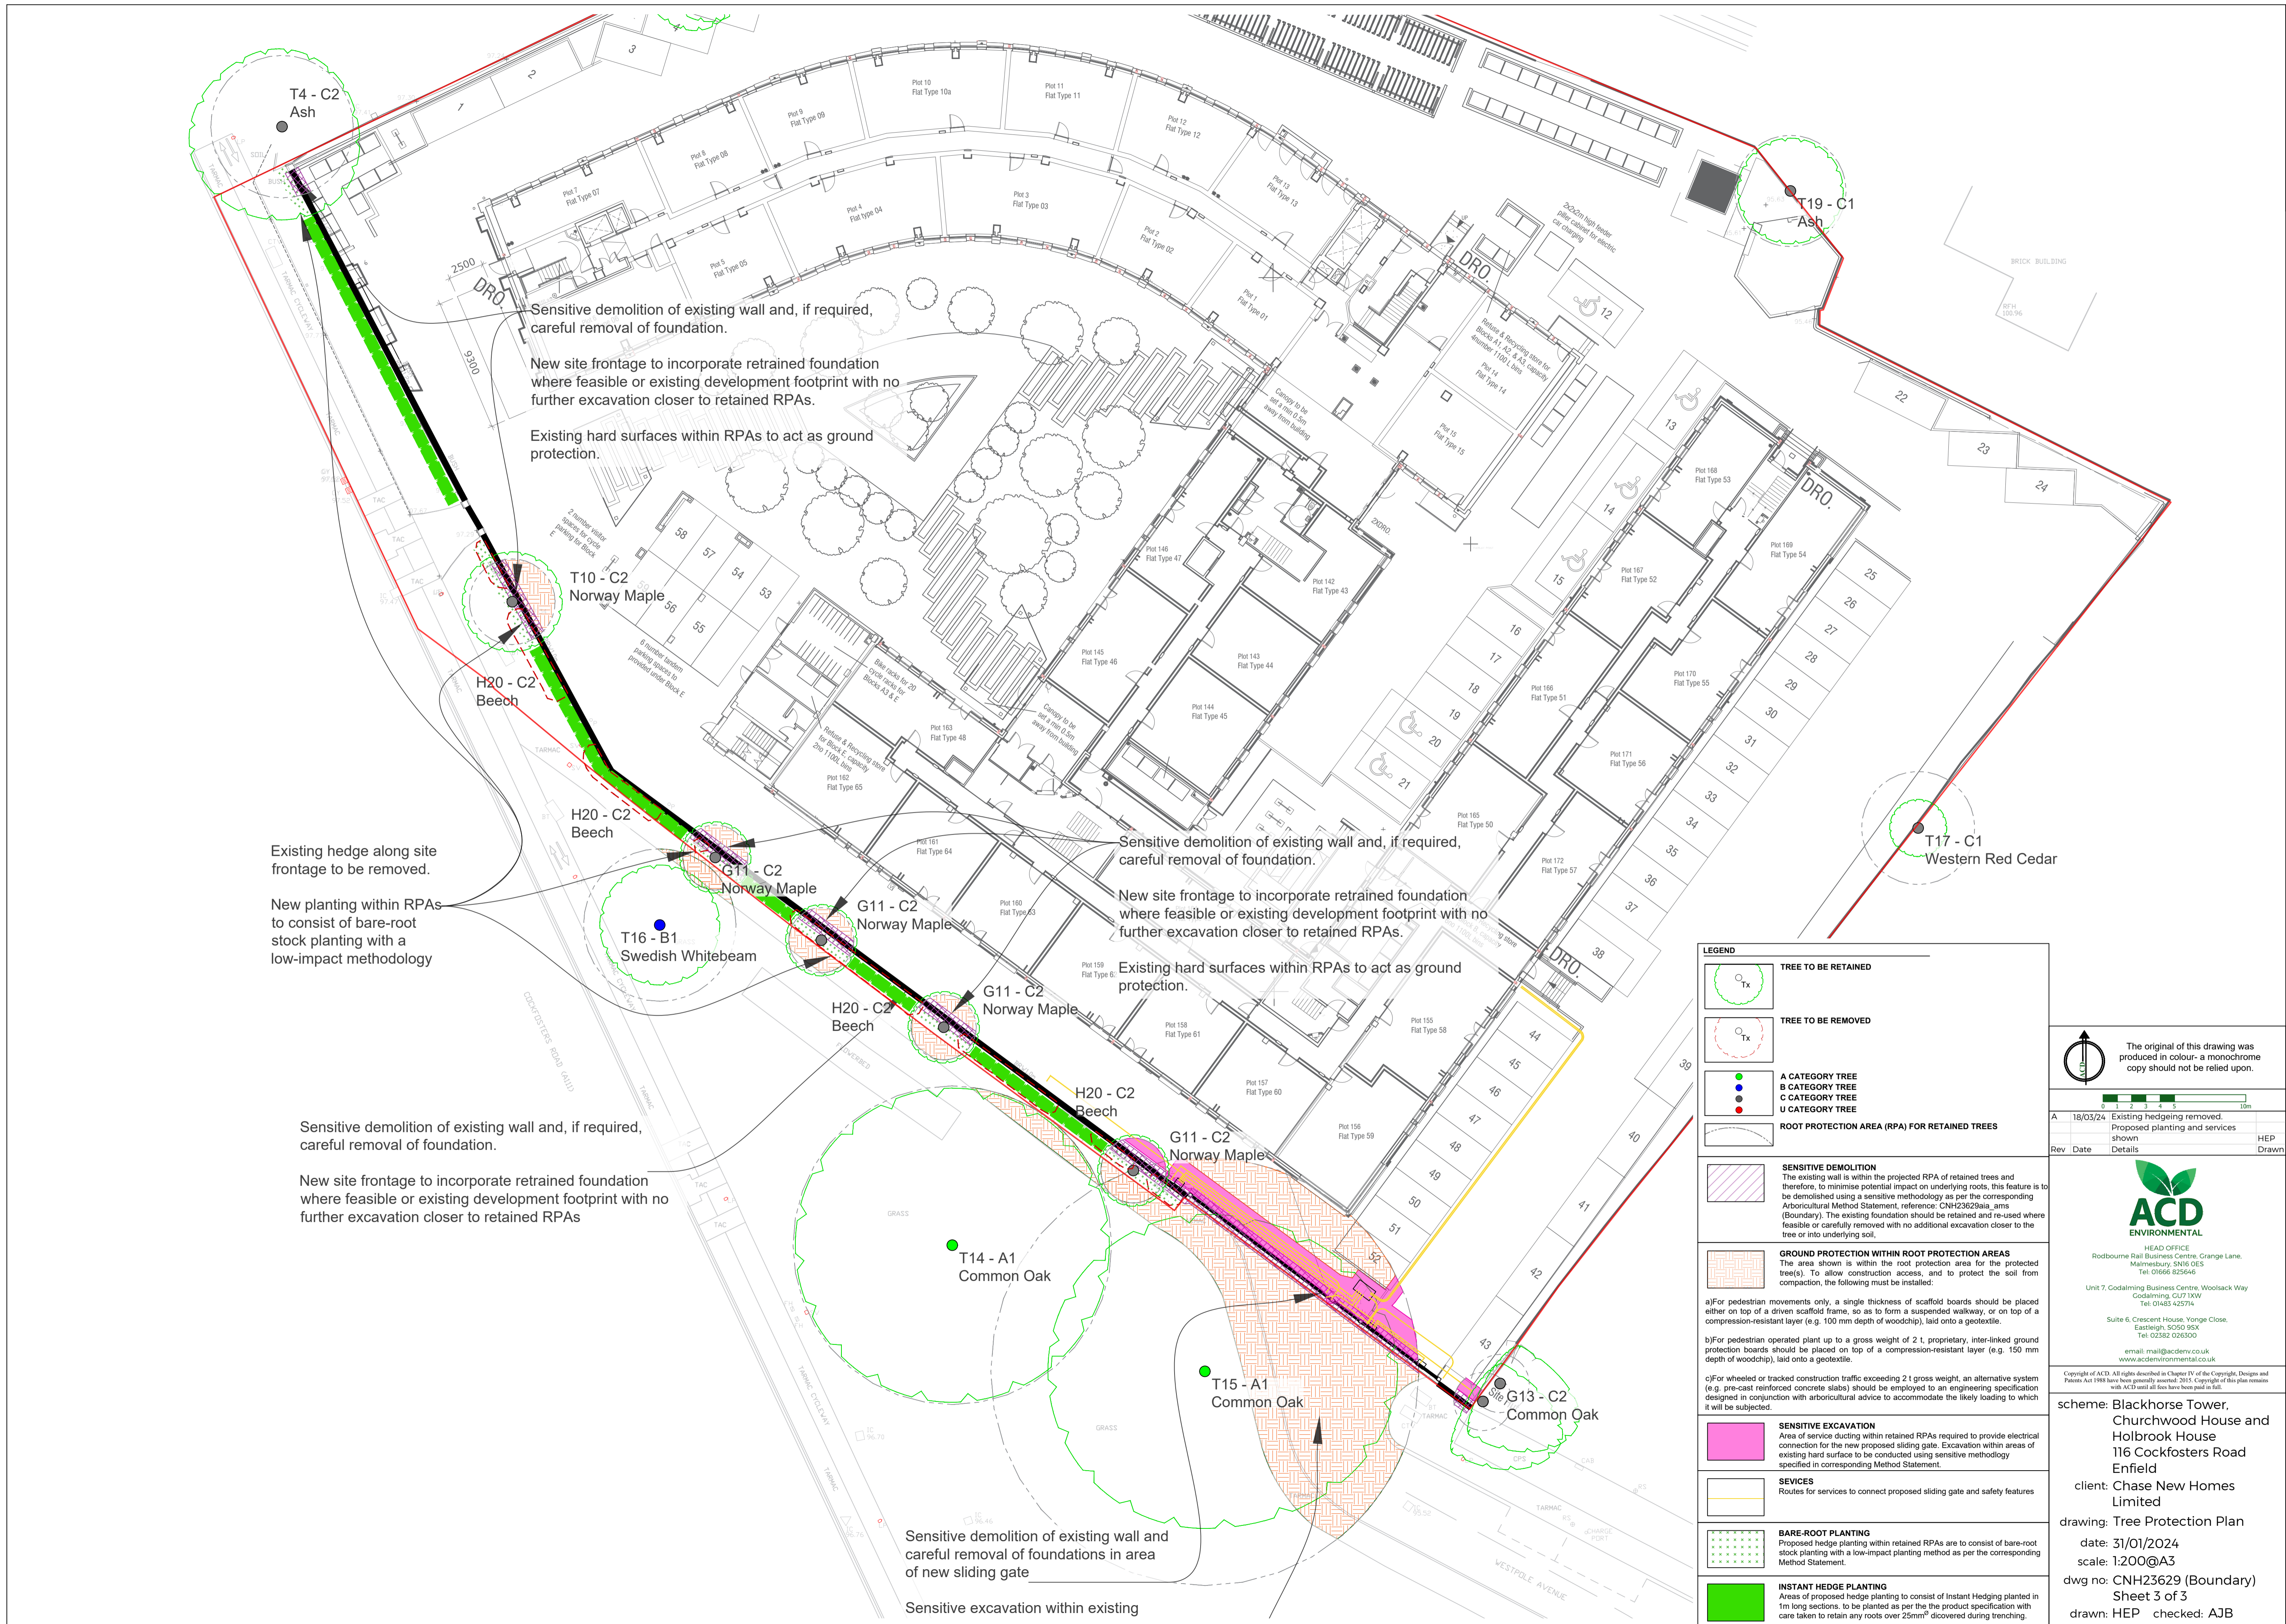
c) For wheeled or tracked construction traffic exceeding 2 t gross weight, an alternative system (e.g. pre-cast reinforced concrete slabs) should be employed to an engineering specification designed in conjunction with arboricultural advice to accommodate the likely loading to which it will be subjected.

SENSITIVE EXCAVATION
Area of service ducting within retained RPAs required to provide electrical connection for the new proposed sliding gate. Excavation within areas of existing hard surface to be conducted using sensitive methodology specified in corresponding Method Statement.

SERVICES
Routes for services to connect proposed sliding gate and safety features

BARE-ROOT PLANTING
Proposed hedge planting within retained RPAs are to consist of bare-root stock planting with a low-impact planting method as per the corresponding Method Statement.

INSTANT HEDGE PLANTING
Areas of proposed hedge planting to consist of Instant Hedging planted in 1m long sections. to be planted as per the the product specification with care taken to retain any roots over 25mm^Ø discovered during trenching.



Sensitive demolition of existing wall and, if required, careful removal of foundation.

New site frontage to incorporate retained foundation where feasible or existing development footprint with no further excavation closer to retained RPAs.

Existing hard surfaces within RPAs to act as ground protection.

Sensitive demolition of existing wall and, if required, careful removal of foundation.

New site frontage to incorporate retained foundation where feasible or existing development footprint with no further excavation closer to retained RPAs.

Existing hard surfaces within RPAs to act as ground protection.

Existing hedge along site frontage to be removed.

New planting within RPAs to consist of bare-root stock planting with a low-impact methodology

Sensitive demolition of existing wall and, if required, careful removal of foundation.

New site frontage to incorporate retained foundation where feasible or existing development footprint with no further excavation closer to retained RPAs

Sensitive demolition of existing wall and careful removal of foundations in area of new sliding gate

Sensitive excavation within existing

LEGEND

- TREE TO BE RETAINED
- TREE TO BE REMOVED
- A CATEGORY TREE
- B CATEGORY TREE
- C CATEGORY TREE
- U CATEGORY TREE
- ROOT PROTECTION AREA (RPA) FOR RETAINED TREES
- SENSITIVE DEMOLITION
The existing wall is within the projected RPA of retained trees and therefore, to minimise potential impact on underlying roots, this feature is to be demolished using a sensitive methodology as per the corresponding Arboricultural Method Statement, reference: CNH23629a_ams (Boundary). The existing foundation should be retained and re-used where feasible or carefully removed with no additional excavation closer to the tree or into underlying soil.
- GROUND PROTECTION WITHIN ROOT PROTECTION AREAS
The area shown is within the root protection area for the protected tree(s). To allow construction access, and to protect the soil from compaction, the following must be installed:
a) For pedestrian movements only, a single thickness of scaffold boards should be placed either on top of a driven scaffold frame, so as to form a suspended walkway, or on top of a compression-resistant layer (e.g. 100 mm depth of woodchip), laid onto a geotextile.
b) For pedestrian operated plant up to a gross weight of 2 t, proprietary, inter-linked ground protection boards should be placed on top of a compression-resistant layer (e.g. 150 mm depth of woodchip), laid onto a geotextile.
c) For wheeled or tracked construction traffic exceeding 2 t gross weight, an alternative system (e.g. pre-cast reinforced concrete slabs) should be employed to an engineering specification designed in conjunction with arboricultural advice to accommodate the likely loading to which it will be subjected.
- SENSITIVE EXCAVATION
Area of service ducting within retained RPAs required to provide electrical connection for the new proposed sliding gate. Excavation within areas of existing hard surface to be conducted using sensitive methodology specified in corresponding Method Statement.
- SERVICES
Routes for services to connect proposed sliding gate and safety features
- BARE-ROOT PLANTING
Proposed hedge planting within retained RPAs are to consist of bare-root stock planting with a low-impact planting method as per the corresponding Method Statement.
- INSTANT HEDGE PLANTING
Areas of proposed hedge planting to consist of Instant Hedging planted in 1m long sections, to be planted as per the product specification with care taken to retain any roots over 25mm² discovered during trenching.

The original of this drawing was produced in colour - a monochrome copy should not be relied upon.

18/03/24 Existing hedging removed.
Proposed planting and services shown
Rev Date Details HEP Drawn

ACD ENVIRONMENTAL
HEAD OFFICE
Rodbourn Road Business Centre, Grange Lane,
Malmesbury, SN16 0ES
Tel: 01666 825646
Unit 7, Godalming Business Centre, Woolsack Way
Godalming, GU7 1XW
Tel: 01483 823774
Suite 6, Crescent House, Yonge Close,
Eastleigh, SO50 9SX
Tel: 02382 026300
email: mail@acdenv.co.uk
www.acdenvironmental.co.uk

Copyright of ACD. All rights reserved as Chapter IV of the Copyright, Design and Patents Act 1988 have been generally assigned. 2015. Copyright of this plan remains with ACD until all fees have been paid in full.

scheme: Blackhorse Tower, Churchwood House and Holbrook House 116 Cockfosters Road Enfield
client: Chase New Homes Limited
drawing: Tree Protection Plan
date: 31/01/2024
scale: 1:200@A3
dwg no: CNH23629 (Boundary) Sheet 3 of 3
drawn: HEP checked: AJB