


Notes:


**Copyright@SequinDesign**

This drawing is the property of SEQUIN DESIGN and is the subject of Intellectual Property Rights including copyright and design right and shall not be reproduced, copied, loaned or submitted to any other party without the written consent of SEQUIN DESIGN. This drawing is not to be scaled for construction. Just to scale for planning purposes. Only figured dimensions to be taken. Any discrepancies to be reported SEQUIN DESIGN prior to setting out or ordering of any materials.

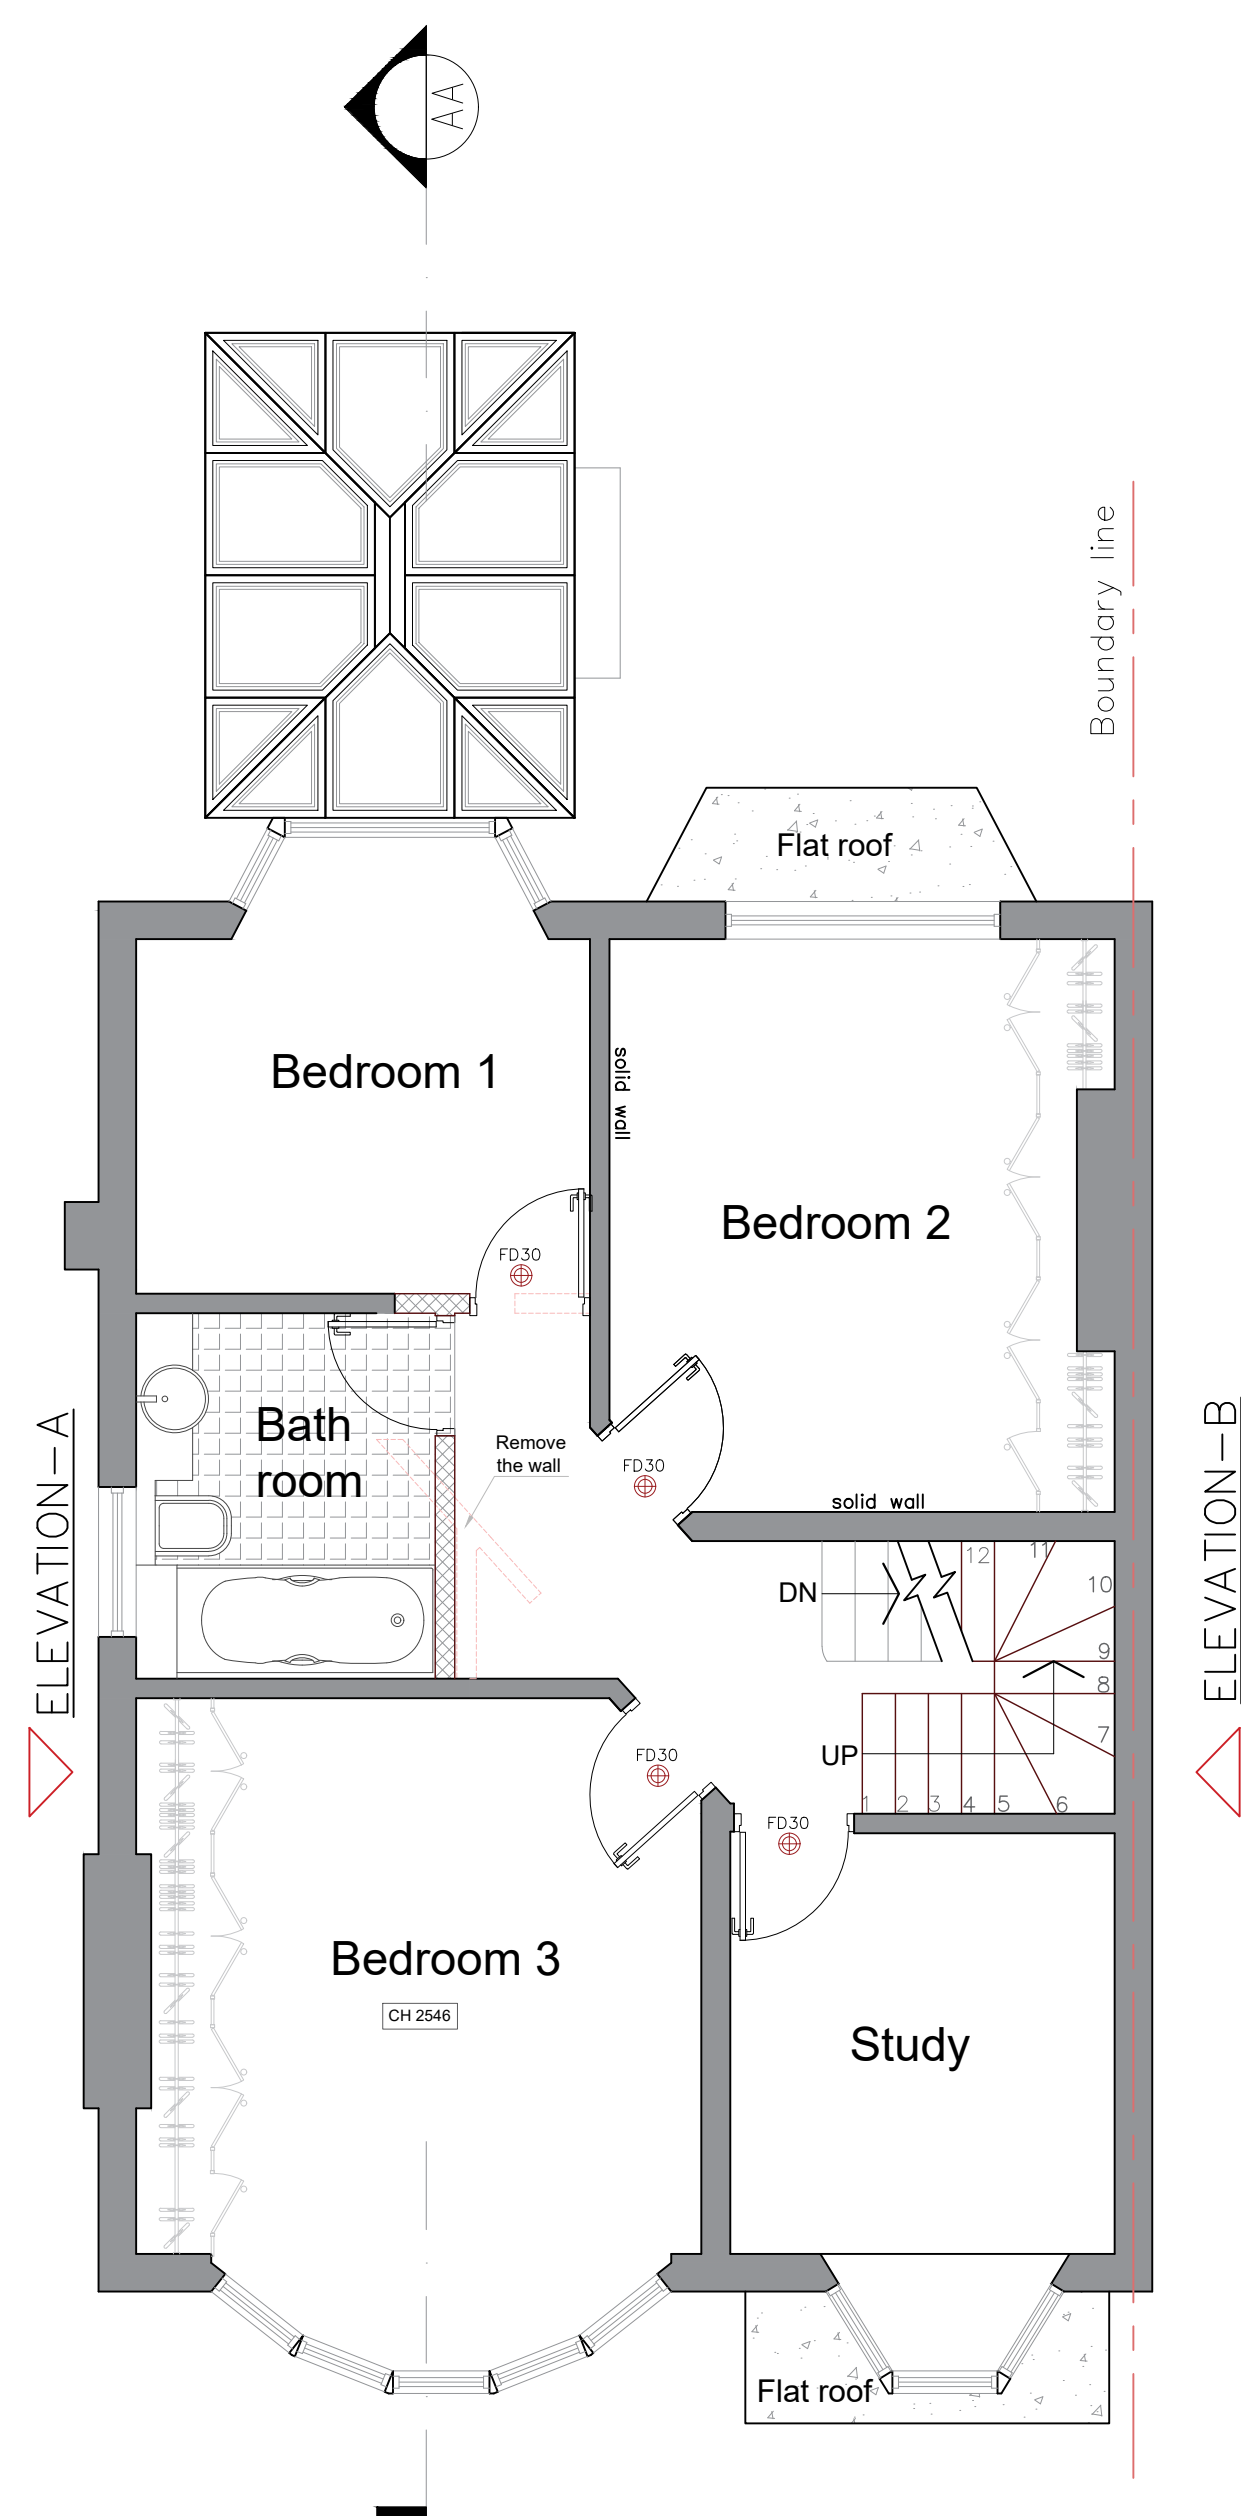


**PROPOSED FIRST FLOOR PLAN**  
SCALE 1:50

- LEGEND:**
- Internal stud partitions- 125mm thk. stud studs at 400mm crs, 100mm thk. RW rockwool sound slab insulation between studs. Provide 1 layers of 12.50mm thk. fireline plasterboard either side of the wall.
  - Party wall- 150mm thk. stud studs at 400mm crs, 100mm thk. RW rockwool sound slab insulation between studs. Provide 2 layers of 12.50mm thk. fireline plasterboard either side of the wall. Party wall to achieve 1.0 hrs fire rating.
  - Wall mounted extract fan
  - Door to be 1 hour fire resistant self closing FD60 with 25mm min. rebates.
  - Position of mains operated interconnected heat detector
  - Position of mains operated interconnected smoke alarms to BS 5446:Part 1:1990 to circulation areas at all levels, as required by Approved document Part B
  - Carbon detector

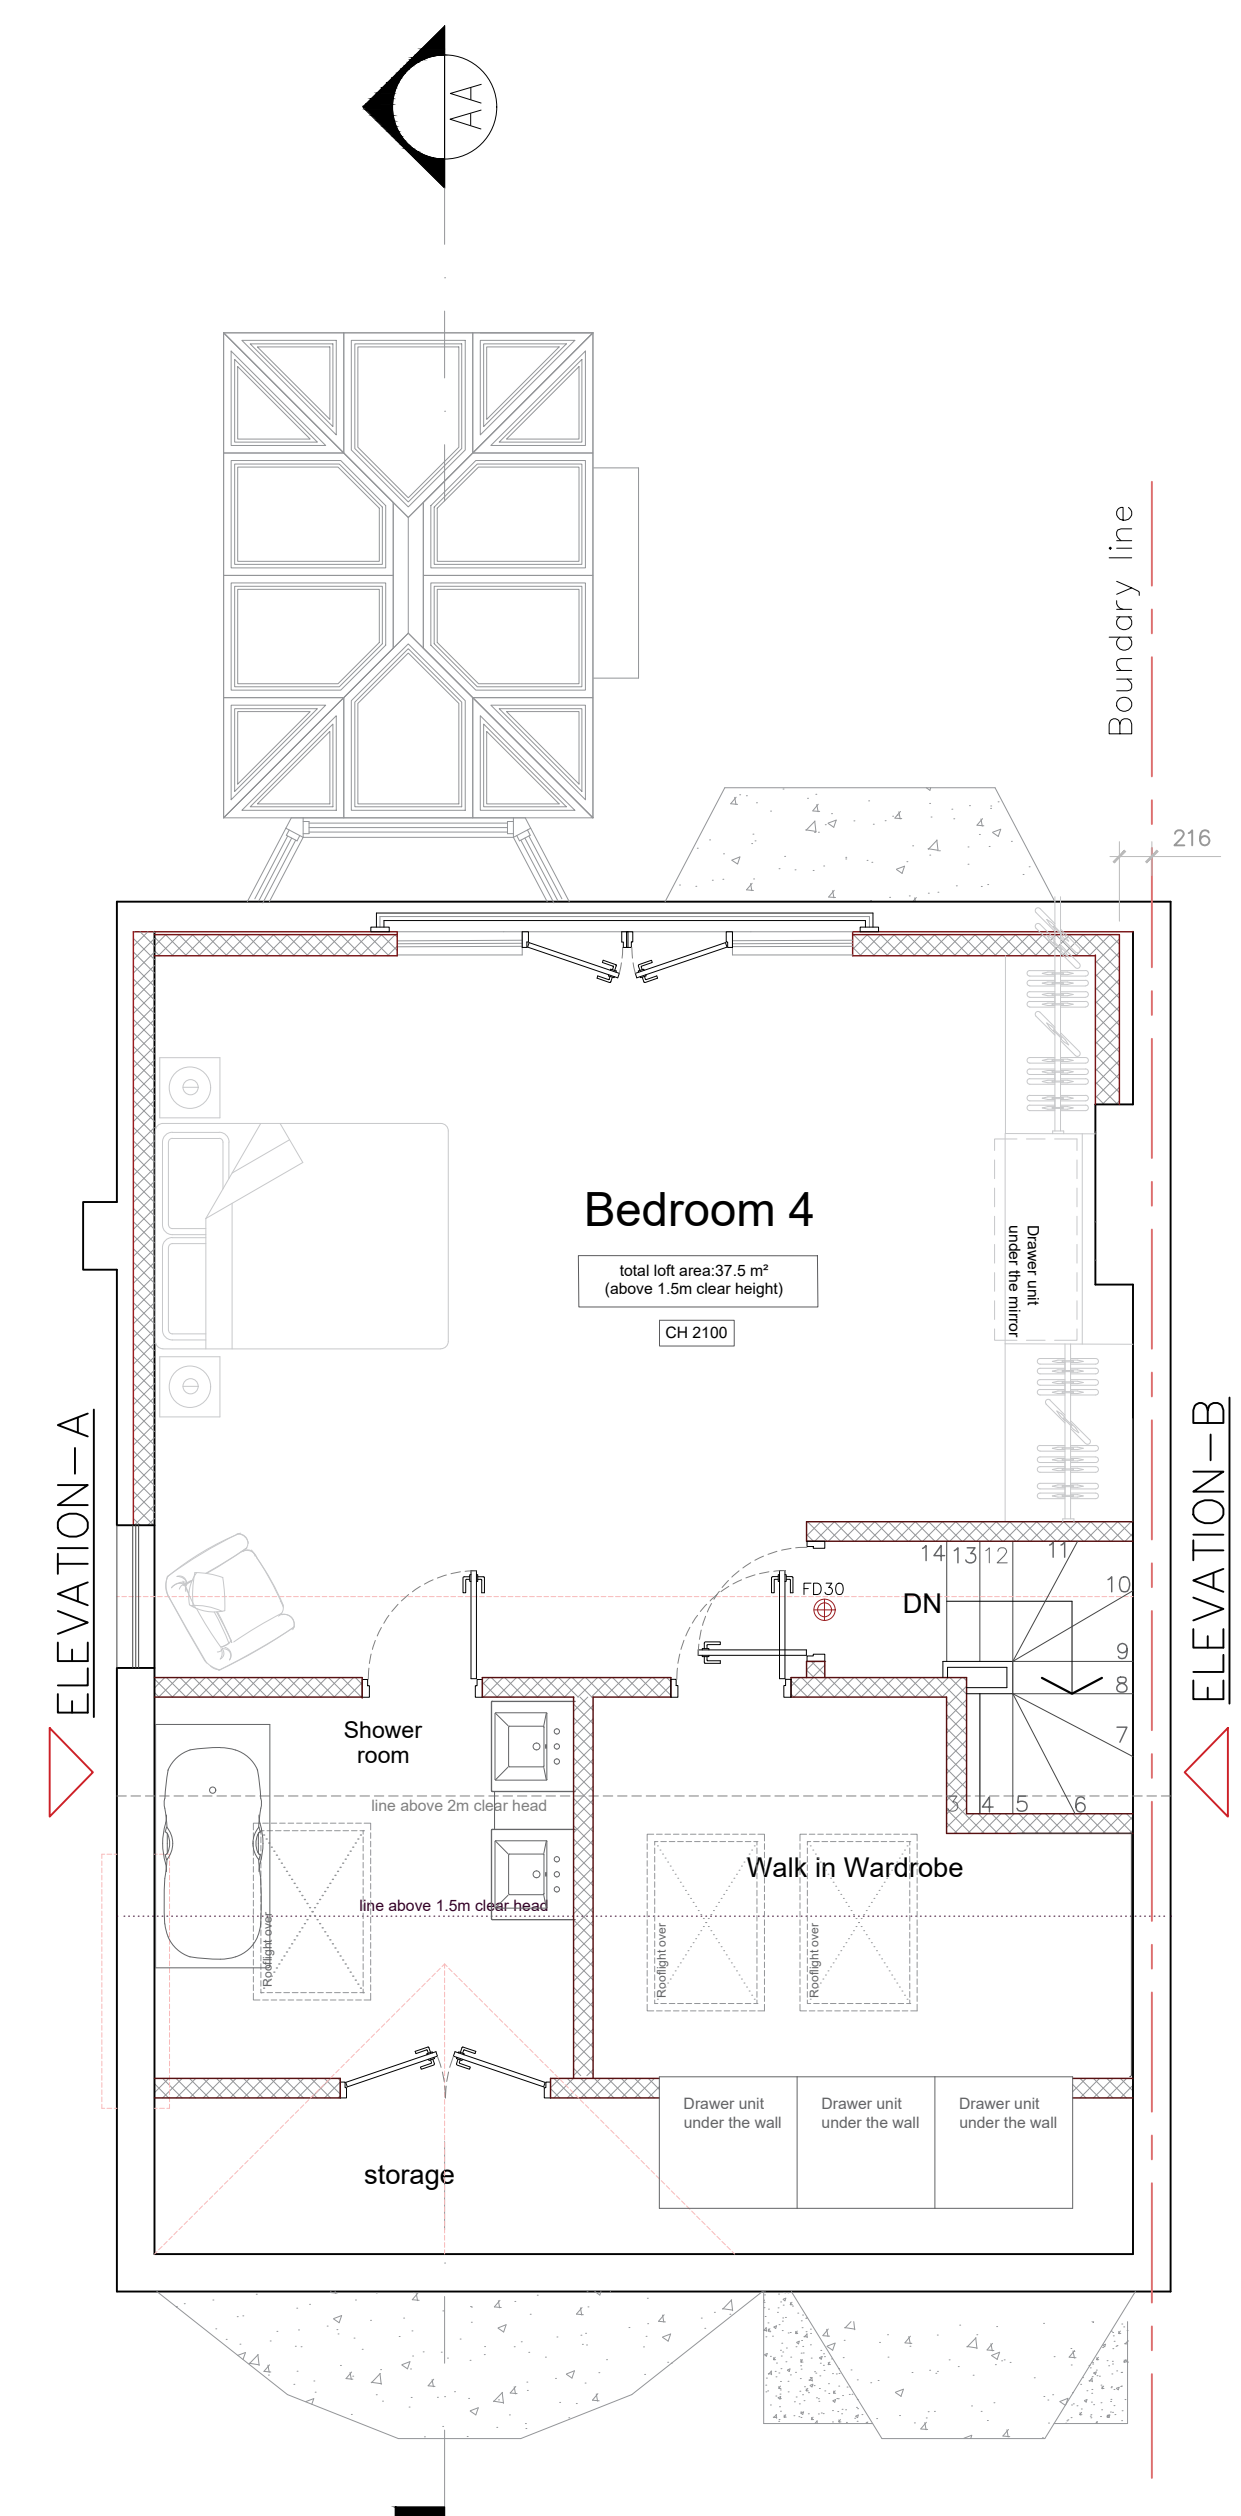

**PROPOSED SECOND FLOOR PLAN**  
SCALE 1:50

- LEGEND:**
- Internal stud partitions- 125mm thk. stud studs at 400mm crs, 100mm thk. RW rockwool sound slab insulation between studs. Provide 1 layers of 12.50mm thk. fireline plasterboard either side of the wall.
  - Party wall- 150mm thk. stud studs at 400mm crs, 100mm thk. RW rockwool sound slab insulation between studs. Provide 2 layers of 12.50mm thk. fireline plasterboard either side of the wall. Party wall to achieve 1.0 hrs fire rating.
  - Wall mounted extract fan
  - Door to be 1 hour fire resistant self closing FD60 with 25mm min. rebates.
  - Position of mains operated interconnected heat detector
  - Position of mains operated interconnected smoke alarms to BS 5446:Part 1:1990 to circulation areas at all levels, as required by Approved document Part B
  - Carbon detector

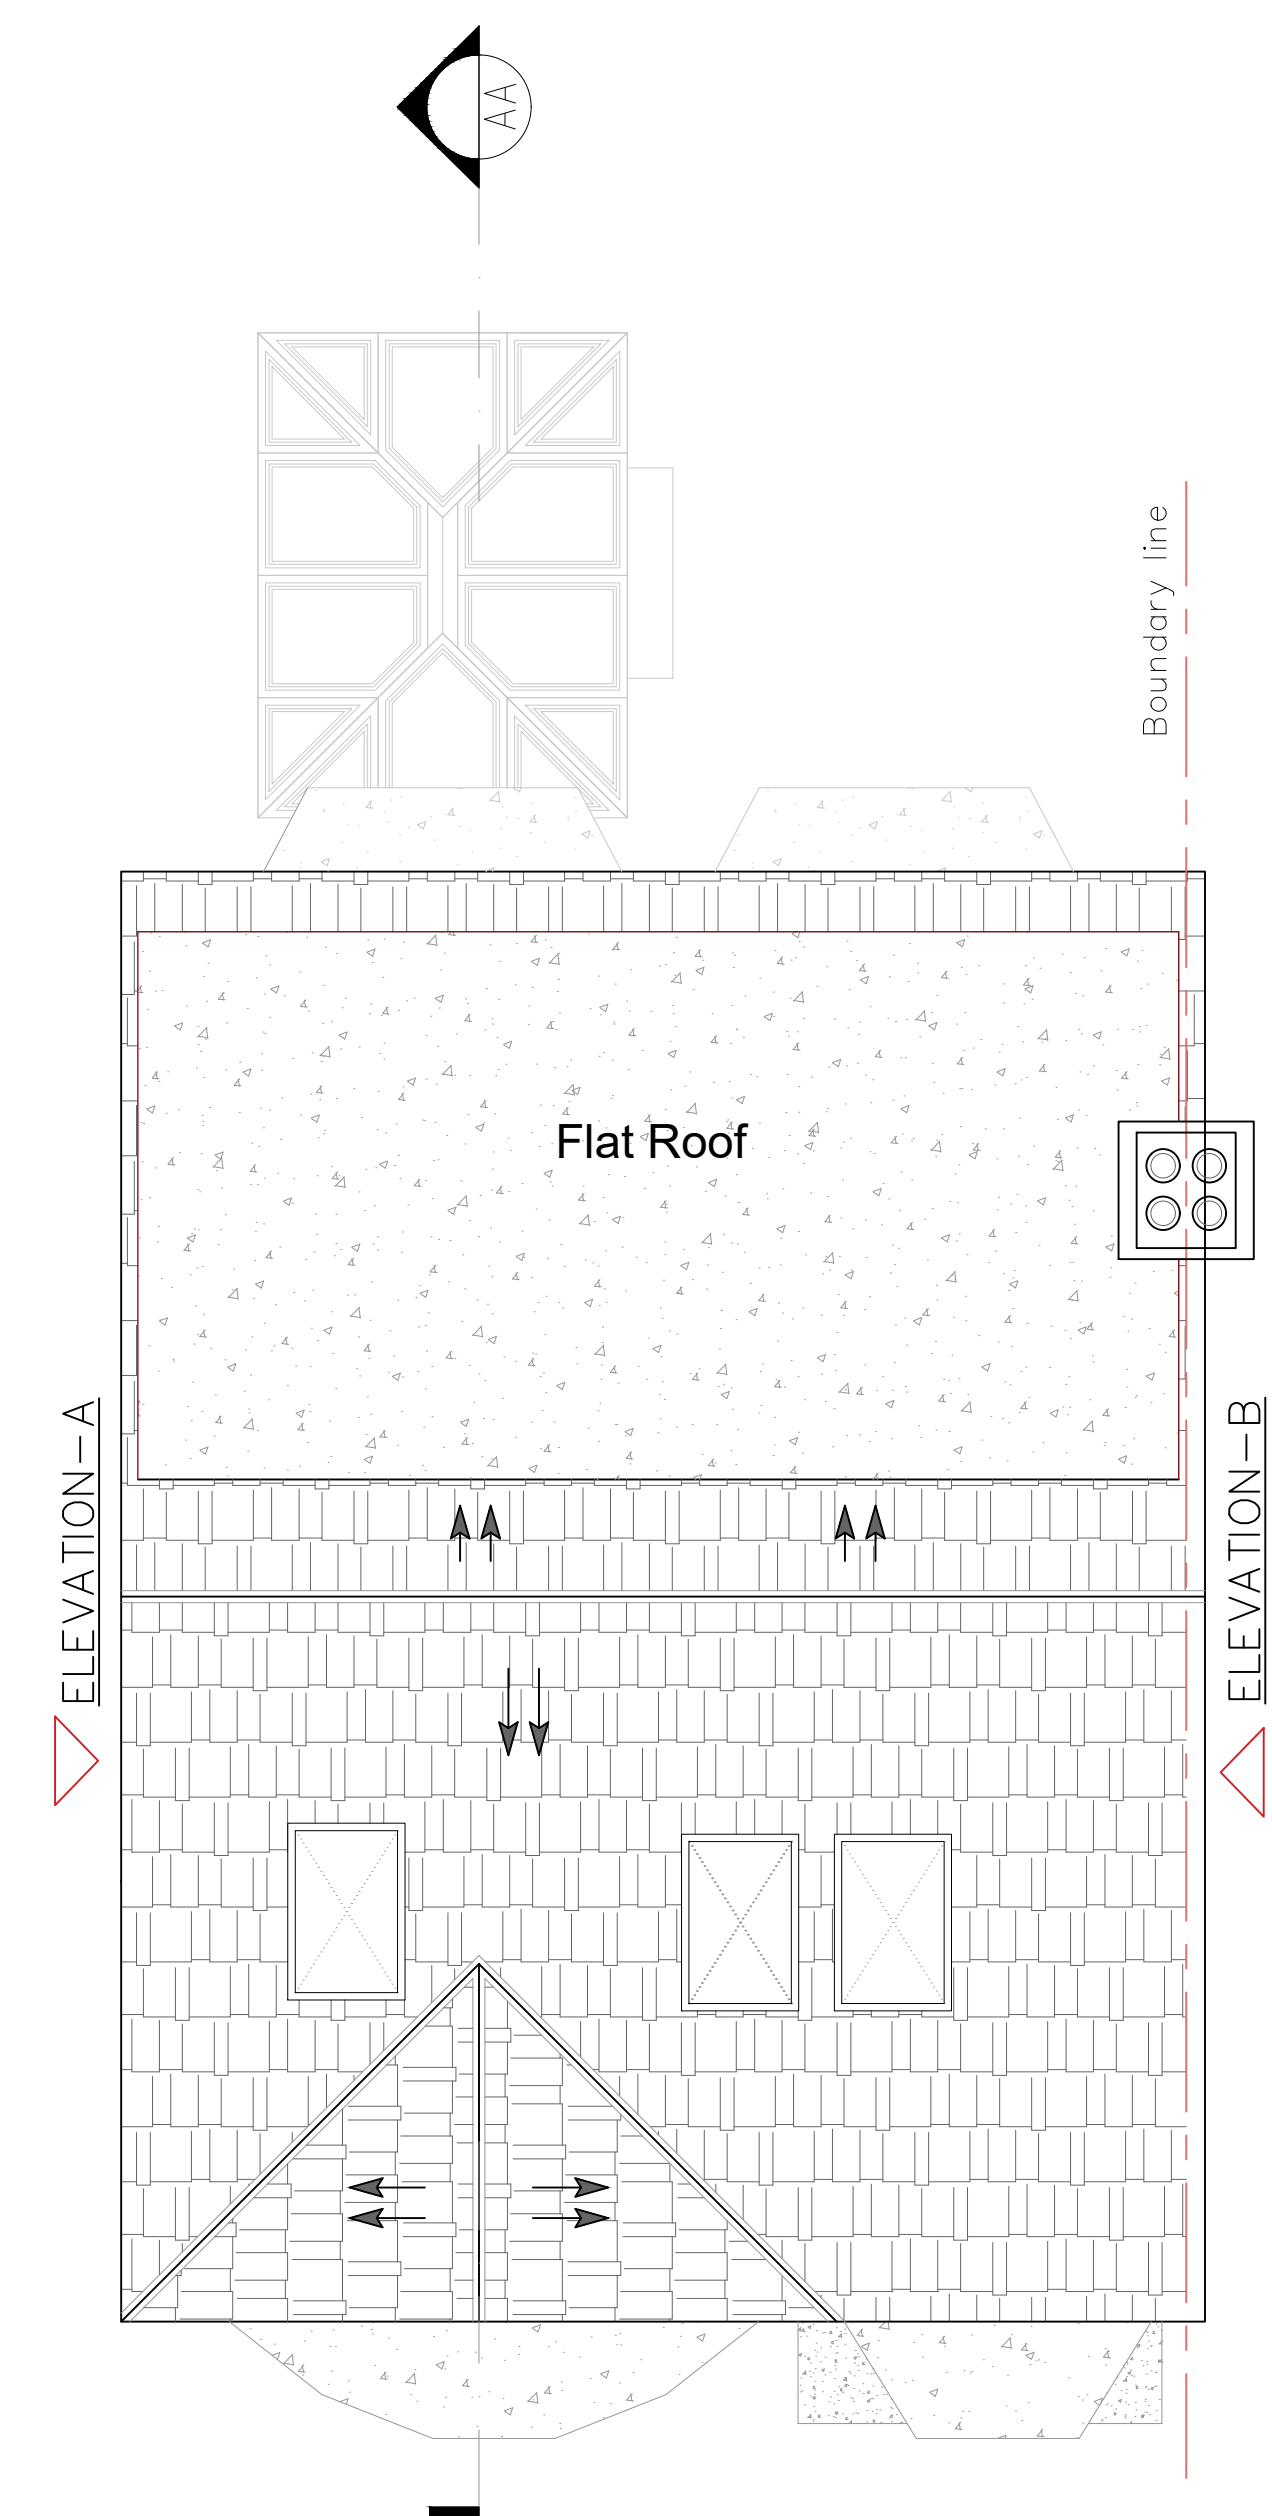

**PROPOSED ROOF PLAN**  
SCALE 1:50



**DRAFT**  
NOT FOR CONSTRUCTION

| REV. | DESCRIPTION        | BY | DATE |
|------|--------------------|----|------|
|      | CONSTRUCTION ISSUE |    |      |

**Sequin Design**  
Architectural services  
+44 7403401414  
www.sequindesign.com  
info@sequindesign.com

CLIENT:  
**MR & Mrs Sameera & Jonny**

ARCHITECT:  
**SEQUIN DESIGN**  
ARCHITECTURAL SERVICES  
LONDON

SITE:  
**60 Courthouse Road,  
N12 7PJ**

TITLE:  
**PROPOSED FLOOR PLAN**

| SCALE AT A1 | DATE        | DRAWN    | CHECKED |
|-------------|-------------|----------|---------|
| 1:50@A1     | 03/03/2022  | PT       |         |
| PROJECT NO. | DRAWING NO. | REVISION |         |
| SD-105      | P0-02       | -        |         |