

ALLAN ^{EST. 1811} BROS

Craftsmen of Bespoke Timber Windows & Doors



Quotation letter for bespoke timber windows and doors



Allan House, Ord Road, Berwick-upon Tweed, Northumberland, TD15 2XU
Tel: +44 (0)1289 334600 | Fax: +44 (0)1289 334601
Email: enquiries@allanbrothers.co.uk | www.allanbrothers.co.uk

FOLLOW US:





ALLAN EST. 1811 BROS

Craftsmen of Bespoke Timber Windows & Doors

24/03/2022

Ridgeons Ltd (Saffron Walden)
Ashdon Road Commercial Centre

Saffron Walden
CB10 2NQ



Estimate ref no. 178558-1 - Ref: JRB Builds Enquiry (RIDLERS)

Dear Conor,

We acknowledge and thank you for your recent enquiry in relation to the above Project, and have pleasure in submitting our detailed estimate for your consideration. This estimate is based on an ex-works price of **£1,451.61** (excluding VAT)

Please note, changes may occur from the ongoing development of the worldwide COVID-19 situation.

Our aim is to make the estimate process as simple as possible and to this end we have enclosed;

1. A detailed, priced specification. Please check this carefully to make sure that we have fully understood and matched your requirements
2. General notes and assumptions outlining the basis upon which the estimate is made

We do hope you find this estimate to be of interest, and look forward to receiving your instruction to proceed.

NB, This estimate is valid against any order placed and signed off within 30 days from the date noted above. Any order received outwith the 30 day validity period will become subject to a pricing revision.

The enclosed summary pages include a separate cost for delivery, which assumes all the goods being delivered as a single delivery. Upon confirmation of order against this estimate, final price will be subject to fluctuation, should either the specification, or required manufactured dimensions be amended from those suggested.

Please do not hesitate to contact myself or your local Account Manager, **David Scraggs** on 07712 871156, should you require any further information or clarification on the estimate. It is very important for us to make sure that we have fully met your expectations therefore we will be in touch in due course.

Yours faithfully

Niall Jones

Direct Line:



General notes and assumptions

All Allan Brothers' products are manufactured bespoke and according to our standard sections and profiles. To view these - and all other standard specifications - please visit www.allanbrothers.co.uk

Anything not specifically detailed or referred to in our quotation is excluded.

Allan Brothers are a supply only company. It is therefore the responsibility of the customer to ensure that the order confirmation is accurate and reflects what is requested.

Lead times: An expected lead time will be confirmed upon acceptance of your order. Changes may occur as a result from the development of the global COVID-19 situation.

Containment: Please note we have made no allowance for the provision of containment. If this is required suitable guarding must be provided by others.

Engineering / Design: Our offer is for supply and delivery only based on the information and schedules provided to us and we do not undertake design responsibility. Design / engineering calculations to be provided by others if required.

Building regulations: Whilst Allan Brothers are happy to advise it is ultimately the customer's responsibility to ensure that all work is in accordance with the building regulations in place at the time of installation.

Trickle Ventilation: The areas of trickle ventilation achievable are dependent on the type, configuration and size of item required. Full details are available on request. Where vents are stated in our item descriptions, we have included for our standard type /size vents only, unless otherwise stated. It is the customer's responsibility to ensure compliance with Trickle Vent regulations.

Delivery: Delivery to the UK Mainland is shown separately within our quotation (See attached summary pages) and is based on all the goods being delivered as a single delivery. (All items are palletised and wrapped). Standard deliveries, on which our delivery charge is based, are made on an 18 tonne rigid vehicle with a tail lift and pump truck. Customers can collect the goods if they so wish but this must be pre-arranged and confirmed at least 14-days prior to the proposed supply/delivery date. Allan Brothers reserves the right to make a separate charge for any special delivery/uplift instructions such as weekends, off-loading capability and/or express delivery requests. Any shortages or transport damages must be reported to Allan Brothers within 48 hours from receipt of delivery or the claim will be invalid.

Payment terms: The Company can offer trade accounts subject to a satisfactory credit check and an Account Application form being completed and returned. Customers are advised to apply for an account in good time as Allan Brothers will not be held liable for any delay caused by late credit applications.

Orders that are not subject to credit are payable on a pro-forma basis as follows:

Orders above £5,000 (net of vat) - 50% deposit with order and the balance 7 days prior to delivery
Orders below £5,000 (net of vat) - payment with order

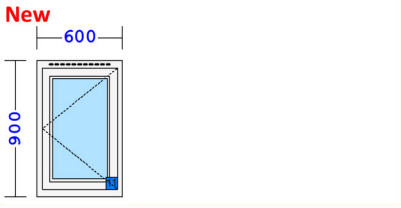
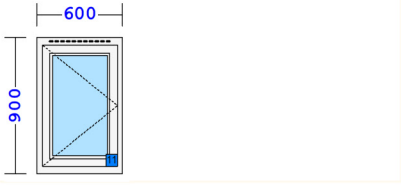
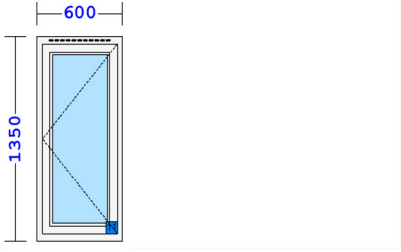
Unless specified elsewhere no allowance has been made for "Secured By Design" and no request made for "Life Time Homes".

GDPR: In order to allow the Company to generate and supply a Quotation or Order, your Personal Details must be stored on our system. By requesting a Quotation or placing an Order you are consenting to the Company storing your details for the purposes of carrying out our contractual obligations. To view our Privacy Policy, please visit www.allanbrothers.co.uk. Your details will not be used for any marketing purposes.


Further information: please visit www.allanbrothers.co.uk to download our warranty document, Q&M manual, Technical information and CE Marking.

Estimate ref no. 178558-1 Summary

Estimate ref no. 178558-1

Line	Overall Size	Reference	Qty	Unit Price	Total
Line 1	600 x 900mm	W1	1		
		<p>Allan Brothers A-Series Casement Item viewed from outside Glazing - 4mm -16- 4mm Soft Coat Low E Black Swiss V Spacer Argon Gas Glazing Beads - Softwood - Internal Bottom Bead - Softwood - Internal Left Hung - Restricted Standard Locking Handle - White A-Series 92mm Frame - Internally Beaded Flush TV90 Vent - White - 425mm (11) Weatherstrip - White Cill Board Groove (Width 0) Head Drip Groove Cill Drip Groove FJL Softwood 62mm Cill Extension DH15 Head Drip RAL 9016 Traffic white Individual Unit Weight 19.599kg</p>			
Line 2	600 x 900mm	W2	1		
		<p>Allan Brothers A-Series Casement Item viewed from outside Glazing - 4mm -16- 4mm Soft Coat Low E Black Swiss V Spacer Argon Gas Glazing Beads - Softwood - Internal Bottom Bead - Softwood - Internal Right Hung - Restricted Standard Locking Handle - White A-Series 92mm Frame - Internally Beaded Flush TV90 Vent - White - 425mm (11) Weatherstrip - White Cill Board Groove (Width 0) Head Drip Groove Cill Drip Groove FJL Softwood 62mm Cill Extension DH15 Head Drip RAL 9016 Traffic white Individual Unit Weight 19.599kg</p>			
Line 3	600 x 1350mm	W3	1		
		<p>Allan Brothers A-Series Casement Item viewed from outside Glazing - 4mm -16- 4mm Soft Coat Low E Black Swiss V Spacer Argon Gas Glazing Beads - Softwood - Internal Bottom Bead - Softwood - Internal Left Hung - Restricted Standard Locking Handle - White A-Series 92mm Frame - Internally Beaded Flush TV90 Vent - White - 425mm (11) Weatherstrip - White Cill Board Groove (Width 0) Head Drip Groove Cill Drip Groove FJL Softwood 62mm Cill Extension DH15 Head Drip RAL 9016 Traffic white Individual Unit Weight 27.55kg</p>			

Estimate ref no. 178558-1

Line	Overall Size	Reference	Qty	Unit Price	Total
Line 4	1200 x 600mm	W4	1		
		Allan Brothers A-Series Casement Item viewed from outside Glazing - 4mm -16- 4mm Soft Coat Low E Black Swiss V Spacer Argon Gas Glazing Beads - Softwood - Internal Bottom Bead - Softwood - Internal Top Hung - Restricted Standard Locking Handle - White A-Series 92mm Frame - Internally Beaded Flush TV90 Vent - White - 695mm (11) Weatherstrip - White Cill Board Groove (Width 0) Head Drip Groove Cill Drip Groove FJL Softwood 62mm Cill Extension DH15 Head Drip RAL 9016 Traffic white Individual Unit Weight 25.287kg			