


This product is discontinued

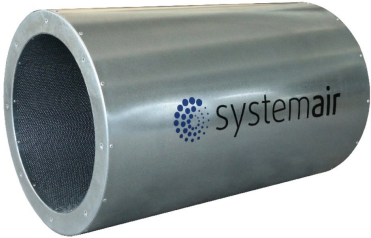

Description

LP Silencer range for Systemairs Axial fan range. For effective noise absorption in ventilation ducts. Casing are rolled, pre-galvanised sheet steel with spun end rings incorporating tapped inserts for fixing. Absorbent material is acoustic grade mineral fibre with a layer of erosion resistant facing and is further protected by a sheet of pregalvanised perforated steel. Moisture resistant lining available for wet conditions or critically clean applications. Type LP silencer bore diameters range from 315mm to 1600mm in lengths of equal to or twice the bore diameter (1D or 2D). Pressure loss for type LP silencers is the same as a plain duct.

[Find more details in our online catalogue](#)

Technical parameters

Dimensions and weights	
Weight	0 kg