

**KEY**

SOFT LANDSCAPING

	Existing Trees to be retained
	Proposed Hedgerow
	Proposed Shrub Beds

**PLANTING NOTES:**

1. Plant handling at the nursery, and during transit up to delivery, shall be in accordance with 'Plant Handling', the booklet published by the Committee for Plant Supply and Establishment (CPSE). The contractor shall comply with clauses 3 & 4 of the above booklet (obtained from the Horticulture Trades Association, 19 High Street, Theale, Reading, Berks RG7 5H) which refers to the receipt, unloading and temporary storage of plants. Plants shall be first class examples of their species or variety, free from all pests and diseases, with good fibrous root systems and materially undamaged (refer to relevant sections of BS3936 Parts 1-4 'Specification of Nursery Stock').

2. All planting is to be in general compliance with BS4428: 1989 'Code of Practice for general landscape operations'

**3. Shrub Beds and Planting General:**

- i) All beds should be free draining and free from builders rubble and large stones. There should be min 450mm of good quality top soil to all the shrubs beds (which is expected to be supplied by the house builder).
- ii) Areas to be treated with a non-residual glyphosate based herbicide prior to planting and cultivated to a depth of 150mm.
- iii) A slow release fertiliser mixed with a peat free compost should be incorporate into the back fill material when planting the shrubs to give them the best possible chance of establishment.
- iv.) For hedges dig a trench the full length of the hedge 500mm wide x 400mm deep and break up the base to facilitate drainage.

**4. Finishing Beds:**

- i) The finished surface of the bed should be free from weeds, stones or rubble and the surface of the soil cultivated to level out any clumps, mounds or depressions.
- ii) When planted all shrub beds are to be mulched with 50mm depth of small grade bark mulch.
- iii) The beds should be maintained weed free and the beds topped up annually with bark mulch as required.

**5. Watering:**

i) All Trees, Hedges and Shrub beds to be watered in the first year of establishment regularly during periods of drought until established.

**6. Weeding:**

All shrub beds to be maintained weed free by regularly hand weeding the beds and spot treating any prolific weeds with a glyphosate based weed killer. Maintaining the bark mulch will also help to reduce weed growth.

7. The contractor must ascertain himself/herself of the exact location of underground services prior to carrying out any digging on site.



DEP LANDSCAPE ARCHITECTURE LTD

2 COMMERCIAL STREET  
MANCHESTER, M15 4RQ  
T: 0161 2419878  
E: info@dep.co.uk  
W: www.dep.co.uk

Client: Euro Garages Ltd.

Project: Solihull High Street

Description: Landscape Layout


Status: Planning

Scale: 1:100@A1  
Job number: 4914  
Drawing number: 01  
Date: Dec 21

Copyright DEP Landscape Architecture Ltd

All levels and dimensions to be checked on site by contractor prior to commencement. Any variations to be reported to the client. This drawing is to be read in conjunction with all others relating to the project and all information derived accordingly; any anomalies to be reported to the client. Do not scale from this drawing. Use figured dimensions only. Work shown on this drawings to be carried out in accordance with current British Standards and Codes of Practice.

© Copyright to DEP Landscape Architecture Limited. The information shown on this drawing shall not be reproduced or copied in any form without prior written consent from DEP Landscape Architecture Limited.

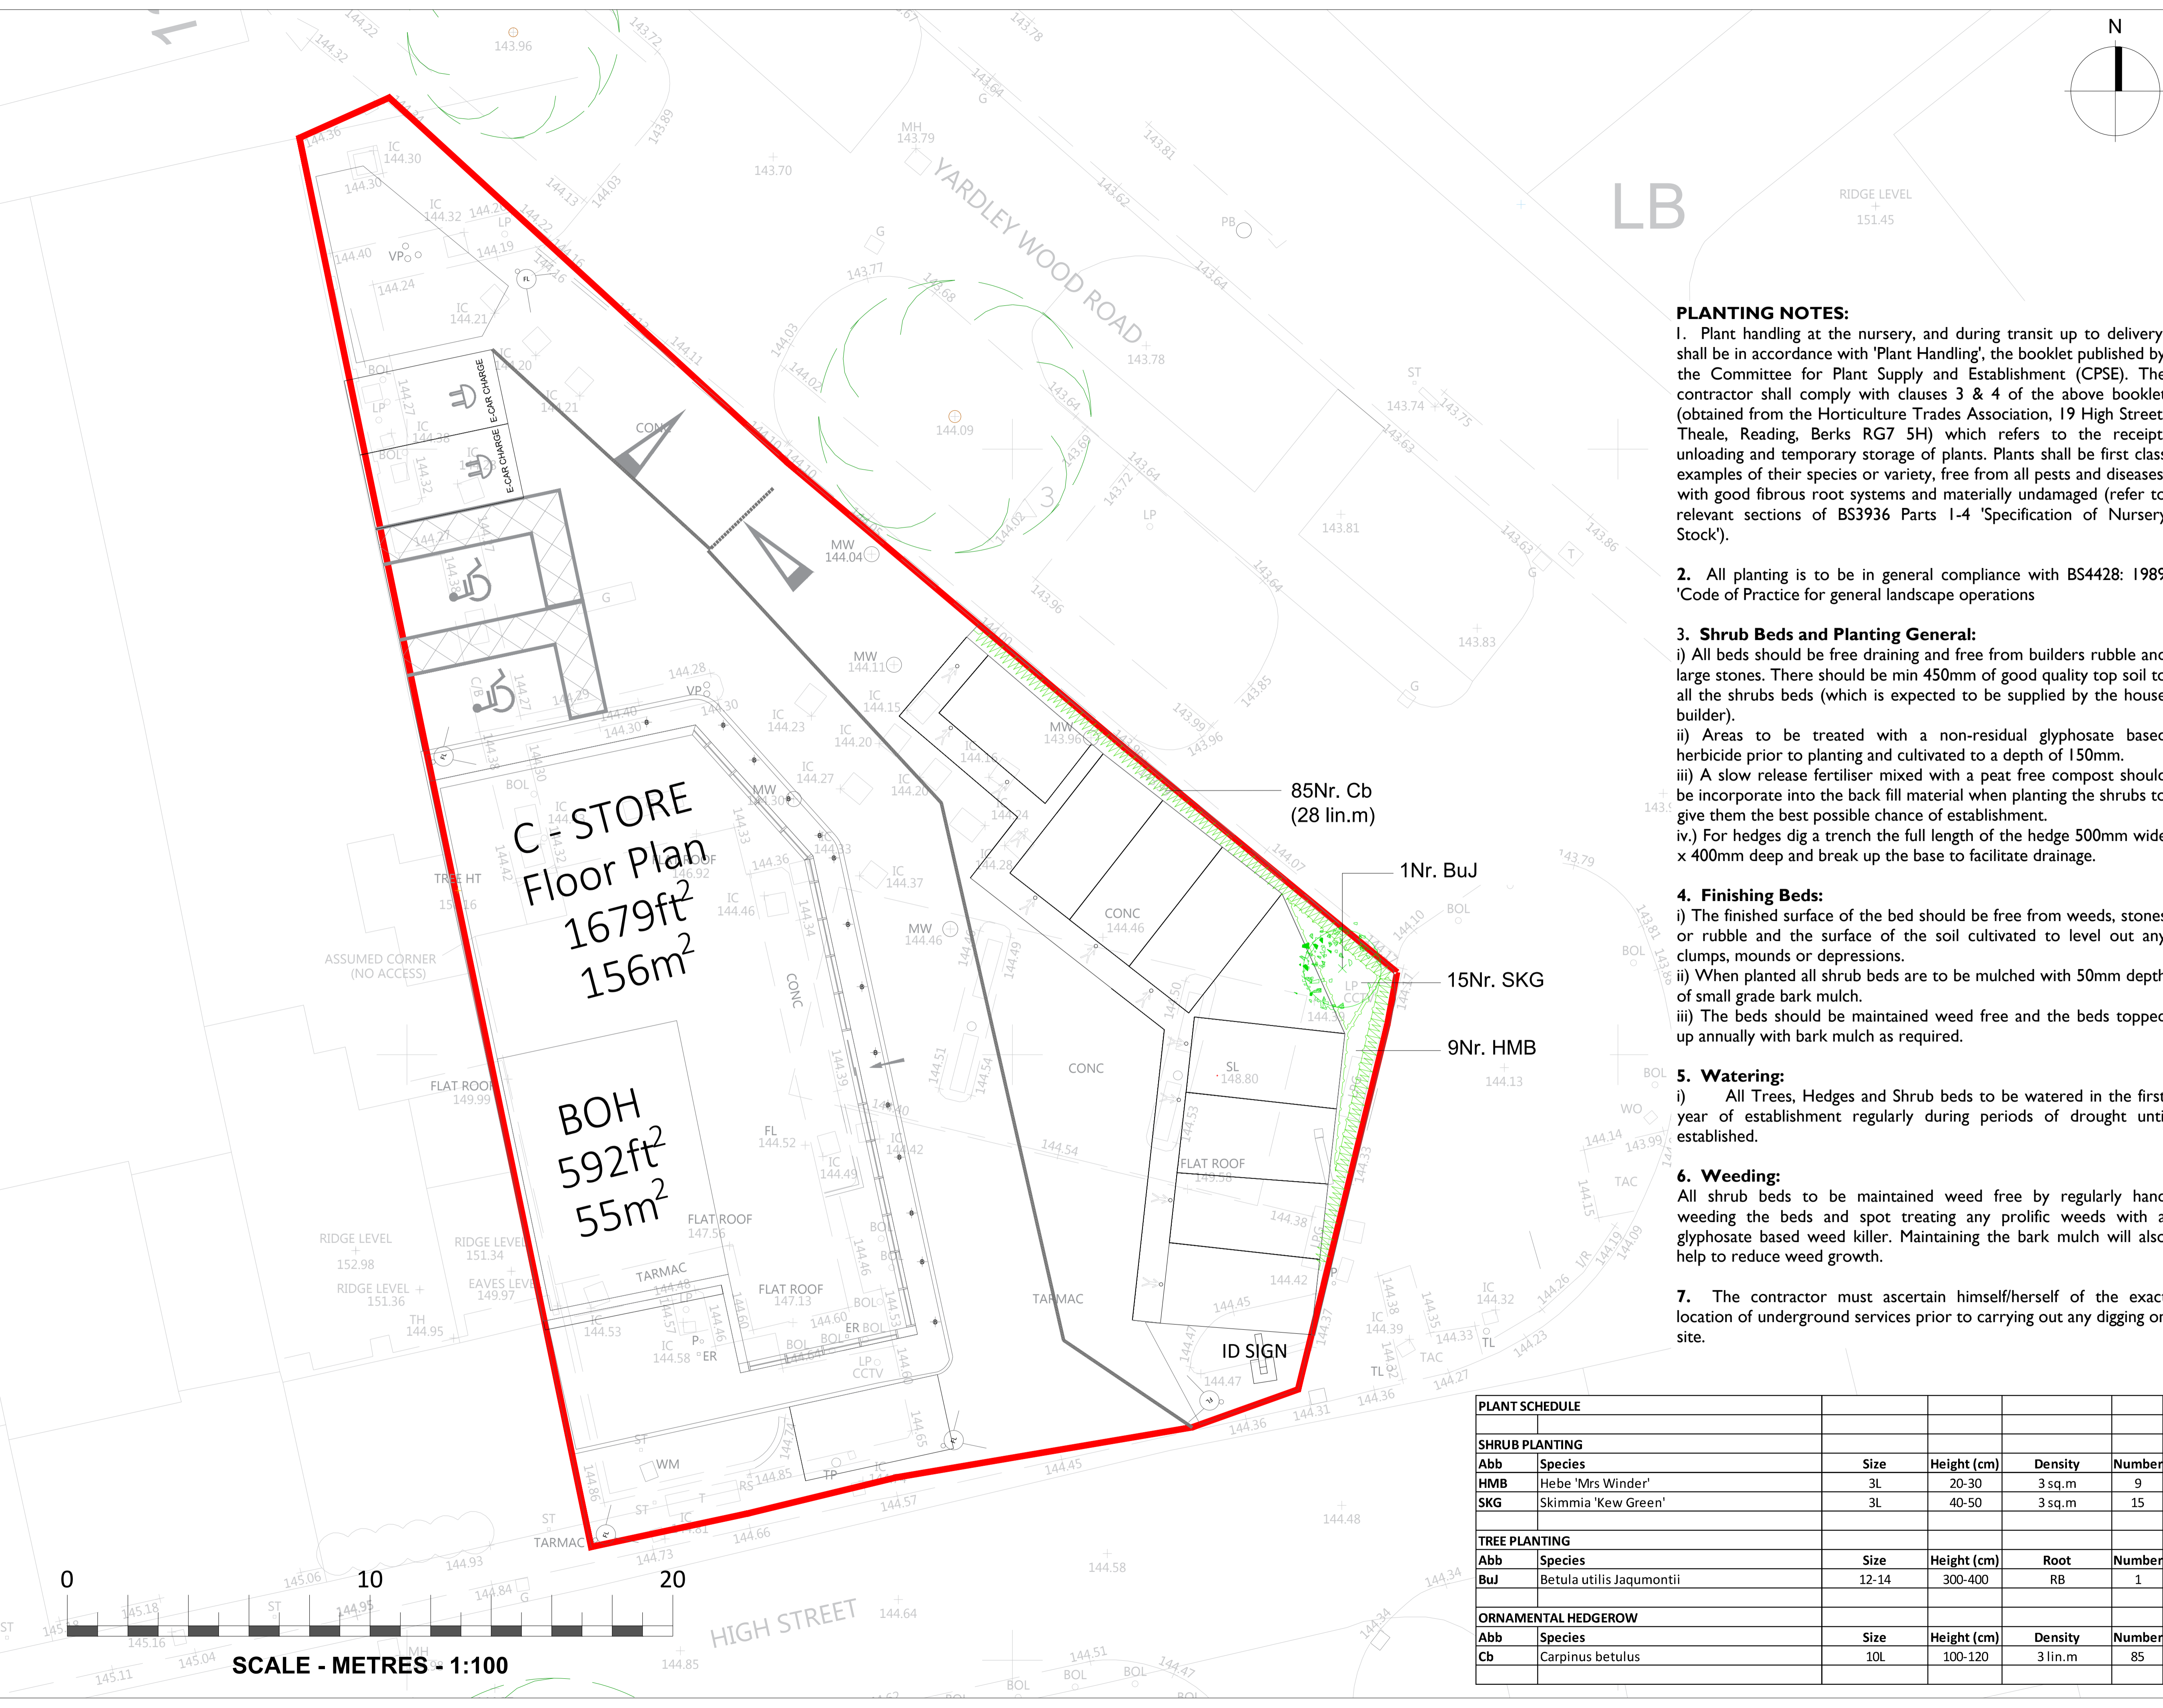

SCALE - METRES - 1:100

PLANT SCHEDULE					
<b>SHRUB PLANTING</b>					
Abb	Species	Size	Height (cm)	Density	Number
HMB	Hebe 'Mrs Winder'	3L	20-30	3 sq.m	9
SKG	Skimmia 'Kew Green'	3L	40-50	3 sq.m	15
<b>TREE PLANTING</b>					
Abb	Species	Size	Height (cm)	Root	Number
BuJ	Betula utilis Jaquomontii	12-14	300-400	RB	1
<b>ORNAMENTAL HEDGEROW</b>					
Abb	Species	Size	Height (cm)	Density	Number
Cb	Carpinus betulus	10L	100-120	3 lin.m	85