


“ \*\*\*NB\*\*\*: DUE TO ORGANISING YOUR JOB, A START DATE MAY TAKE UP TO 5 WORKING DAYS TO BE ARRANGED ONCE THE CONSERVATORY SURVEY HAS BEEN CONFIRMED. WE ARE AIMING TO START THE BUILD WITHIN 6-8 WEEK OF THE CONFIRMATION OF THE SURVEY \*\*\*

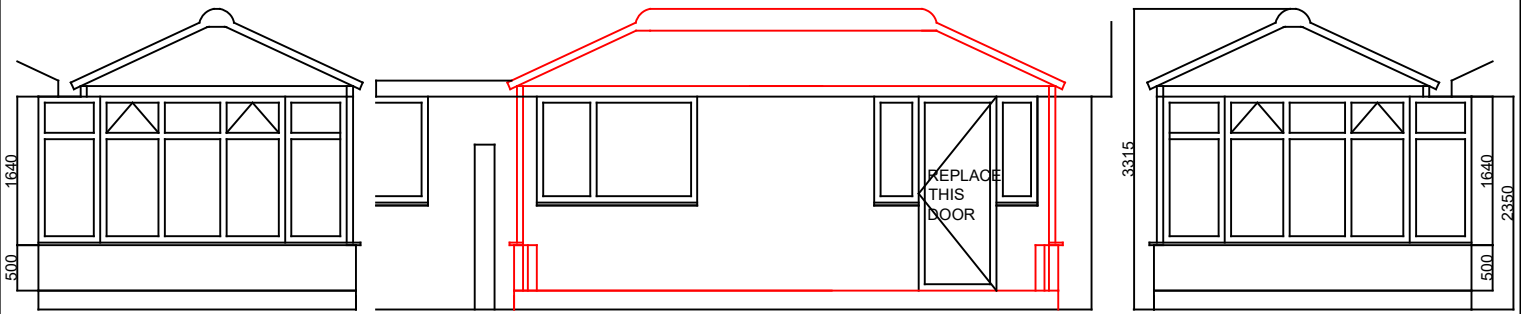

REMOVE EXISTING

START POINT 250mm FROM WINDOW

INSULATED CONCRETE BASE TO THE F.F.L OF THE HOUSE APPROX 210MM ABOVE THE GROUND LEVEL







250MM CAVITY DWARF WALLS, BRICK FACED USING AN IMPERIAL BRICK SIMILAR TO THE HOUSE ON THE OUTSIDE TO A HEIGHT OF 500MM ABOVE BASE, INSIDE TO BE BLOCK.

ALL INTERNAL WALLS TO BE PLASTERED.

N.B  
("Foundation depth shall include an excavation to a maximum of 600mm below ground level. Under extreme rare circumstances should prevailing ground conditions necessitate a deeper excavation/raft/or Piling. The Client shall be notified before additional work commences and agree to any additional charges necessary to complete the work")

DUCTING IN BASE FOR ELECTRICIAN

DOOR FOR KITCHEN

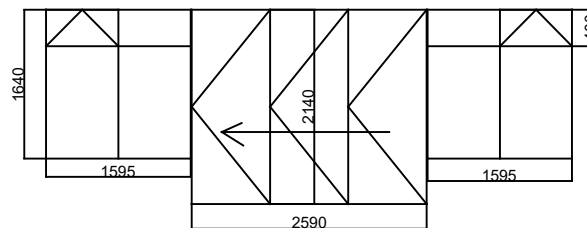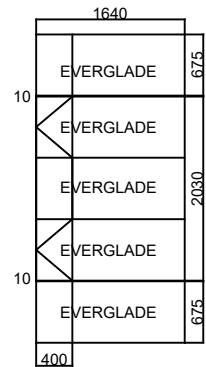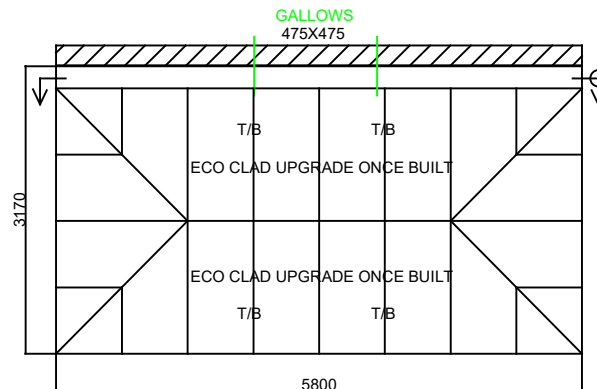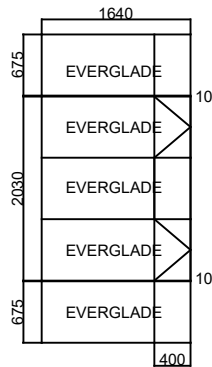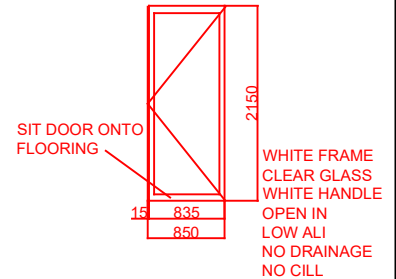

WHITE FRAMES  
25 DEGREE PITCH  
25MM OPAL ROOF  
WHITE HANDLES  
EVERGLADE OBSCURE BOTH SIDES  
UPVC BI FOLD DOORS TO OPEN OUT  
150MM WELDED CILL

PLANNING REQUIRED

direct

conservatory

co

CLIENT: KELLY 65368 & 65369

SITE ADDRESS:  
65 PENSWICK AVE  
CLEVELEYS  
FY5 3BH