


CONTACT INFORMATION

Contact Suffolk Highways via:
 customer.service@suffolk.gov.uk or
 tel: 0345 606 6067

NOTES

1. Sufficient sustainable drainage will be required to prevent surface water entering the Highway.
2. An adopted passing place should be to Suffolk County Council Minor Access Road Specification (see table below or Estate Road Specification). All works to be agreed with Area Manager.
3. Extent and height of kerbing to rear passing bay (if required) to be agreed with Area Manager.
4. Where the passing bay construction extends beyond the existing limit of the Public Highway a legal agreement will be required to enable adoption by Suffolk County Council.

Pavement Courses	Material	Depth
Surface	Hot Rolled Asphalt	50mm
Binder	Hot Rolled Asphalt	50mm
Base	Hot Rolled Asphalt	100mm
Sub Base		
CBR 5% or more	Type 1	225mm
CBR 4%	Type 1	250mm
CBR 3%	Type 1	320mm
CBR less than 2%	Requires special engineering measures to be agreed	

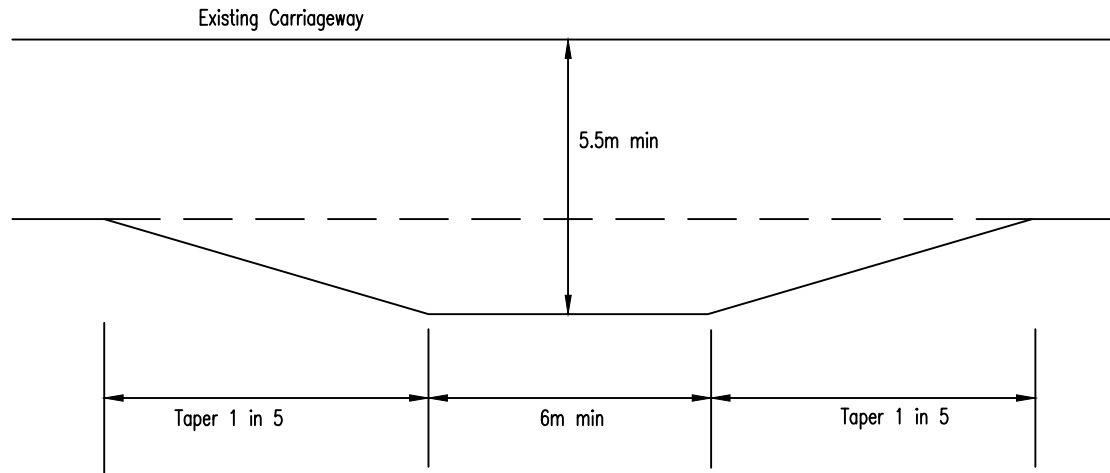

Growth, Highways and Infrastructure
 Suffolk County Council
 Endeavour House,
 8 Russell Road
 Ipswich
 IP1 2BX

PASSING PLACE

REV.	DESCRIPTION	CHECKED	DATE
A	Drawing Revision	SDB	10/14
B	Contact information changed	SM	08/17

INIT.	DATE	PROJECT TITLE	
ORIGINATOR	REH 09/12	DEVELOPMENT MANAGEMENT DRAWINGS	
CHECKER	JN 09/12	SCALE	DATE
DESIGNER	SDB 09/12	Not to Scale	Sept 2012
REVIEWER	CAG 09/12	DRAWING No. DM06	