


Details

All windows manufactured by Preservation Windows are made from a 'Majou' hardwood to the specification and guidelines within BSEN942 "General Classifications of Timber Quality"

The glass to be installed (due to size restrictions) will be the 'Slimlite Heritage Range' and standard double glazed units. 4mm Super Low 'E' / 12mm Super Spacer - gas filled / 4mm clear. This will create a 20mm unit and a 'U' value of 1.4w/m2K.

All windows will be painted to the exterior with 3 coats Sherwin Williams Laqvin prime and finished with Laqvin Top and the interior will be colour/stained match to the existing.

All windows will have the concealed draught proofing system installed.

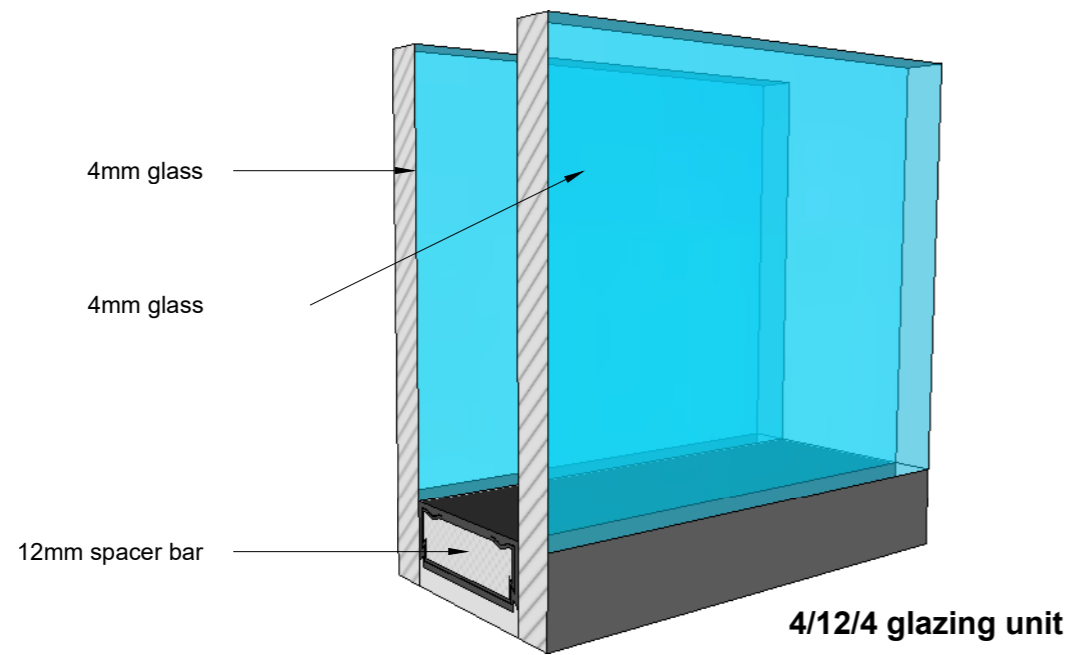

PRESERVATION WINDOWS
6 Telford Place
Lenziemill
Cumbernauld
G67 2NH