

Planting preparation

Tree planting should take place in the planting season (late November to early March). The planting pits must be prepared to a depth the same as that of the rootball and be between 1.5 to 2 times the width of the rootball, the bottom and sides of the planting pit must be broken up with a fork to encourage root ingress and development.

Planting

During planting it is essential that rootballs are not allowed to dry out, if there are strong drying winds the rootballs must be covered. Planting should not be carried out during prolonged periods of frost when the ground is frozen or if the ground is waterlogged.

The rootball must be placed at the correct depth in the planting pit with the root flare clearly visible at the soil surface, the pit must be backfilled with good quality top soil mixed with organic matter.

The tree will be supported with 75mm treated stakes placed either side of the rootball with rubber tree support belting/tree ties attached at one third of the clear stem height of the tree (see planting pit detail diagram).


Aftercare

The base of the trees will be kept weed free for the first 3 years during establishment.

The trees will be watered in the growing season during prolonged dry spells with enough water to keep the soil moist for the depth of the rootball.

Tree ties must be assessed at the beginning of the growing season and loosened if they are tight on the stem.

Tree ties and stakes should be removed after 3-5 years depending on establishment and growth.

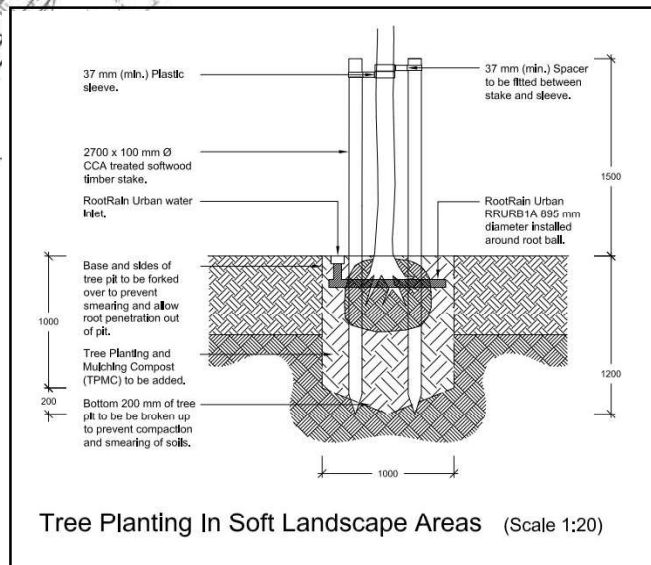

LEGEND

T01 — Number of proposed tree

— Position of proposed tree to be planted at 14-16cm girth.

ASSURED TREES

Project Name:
R/O 53 Springfield Road,
Cotham, Bristol, BS6 5Jt

Drawing Title:
Tree Planting plan

Drawing Number: TPP-06-2022	Revised?
---------------------------------------	-----------------

Client:
Florence Mae Ltd.

Agent:

Date:
June 2022

Scale:
Not to scale