
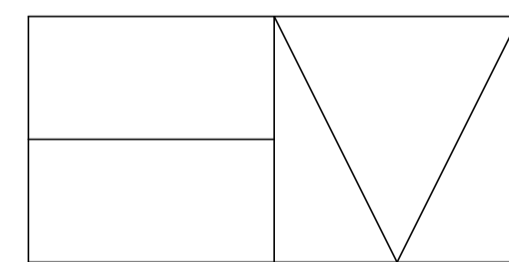


Notes
Copyright and not to be reproduced without the consent of Holmes Miller. Holmes Miller does not accept liability for accuracy or veracity of survey information provided by others and horizontal dimensions and levels provided by Holmes Miller and based on survey information provided by others must be verified on site. **DO NOT SCALE.** Use figured dimensions only.



- Notes**
-  Stone indent as per specification using Blaxter sandstone
 - ① Remove disused timber fixing baseplate
 - ② Remove disused telephone cable bracket
 - ③ Remove disused sign brackets - make good holes
 - ④ Remove disused bracket
 - ⑤ Remove disused overflow pipe - make good hole
 - ⑥ Remove disused brackets for repair and then replace
 - ⑦ Indent required for disused streetlight cable hole
 - ⑧ Remove disused sign bracket remnants
 - ⑨ Small holes to be infilled using lime mortar. Large holes (>30mm dia.) to be indented.

P01 FIRST ISSUE JG RH 21/07/22
Rev Notes Drawn Appr Date



Holmes Miller
89 Minerva Street
Glasgow
G3 8LE
0141 204 2080
www.holmesmiller.com

Project 4864
97-101 Trongate

Drawing Name
Elevational Stonework and Fabric Repairs

Scale @ A1 As indicated
Checked RH
Revision P01

Drawing Number
4864-HML-XX-XX-DR-A-10125