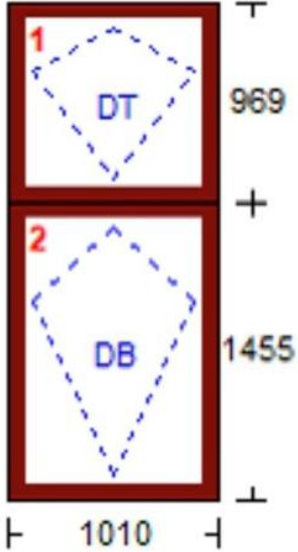


Line:1	Double Swing	W1
		<ul style="list-style-type: none"> - Engineered Redwood window. - Red Pine glazing beads. - Poly wrapped. - 3 coat(s) of White (RAL 9016) Satin paint. - Sill board groove. - White weather strip. - White 425 Trimvent with white canopy. - Sash stiles with standard splayed horns. - Double glazed unit(s) Argon filled. - 24mm glass (4mm softcoat 1.0 clear float / 16mm white warm edge spacer / 4mm clear float) comp. 1. - 24mm glass (4mm softcoat 1.0 clear tough'd / 16mm white warm edge spacer / 4mm clear toughened) comp. 2. - 1 pair of white locking casement handles with white keepers on comp 1,2. - This window is fire escape compliant. - Weight of each single item is approx. 76.70 kg ± 2kg.
Dimensions (W x H)		
1010 mm X 2475 mm (Overall) 950 mm X 2450 mm (Daylight)		
Qty and Price		
43 @		