

New Ivanhoe Cream



Ibstock
At the heart of building

Image not found or type unknown


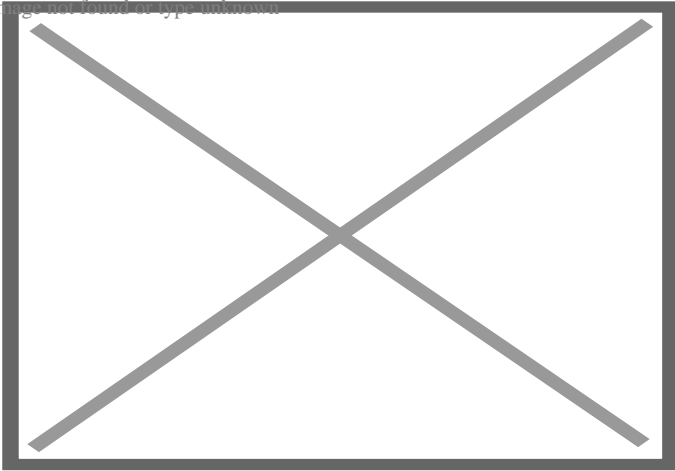


Image not found or type unknown

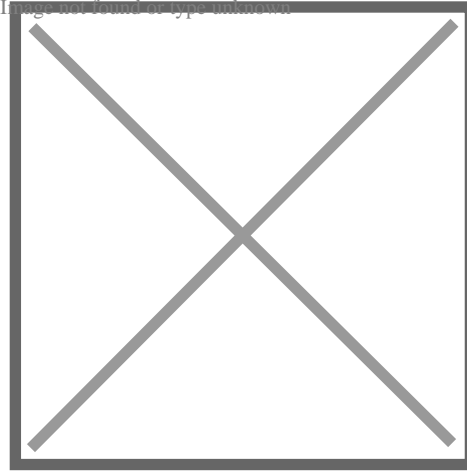

Product Information

Ibstock Code:	0805
Type:	Stock
Facing Description:	Sandcreased
Dry Brick Weight (kg):	2kg
Pack Quantity:	500
Packaging (standard):	Banded (plastic) & Stretchwrapped
Factory:	Eclipse

Technical Specification (to BS EN 771-1)

Brick Dimensions (L x W x H mm):	215x102x65
Size Tolerances Mean & Range:	T2 R1
Configuration:	Single Frog
Voids (%):	8-13
Compressive Strength (N/mm ²):	15
Active Soluble Salts:	S2
Water Absorption (% weight):	25
Durability:	F2
Gross Dry Density (Sound Insulation) (Kg/m ³):	1450
Equivalent Thermal Conductivity "K" value 5% Exposed:	Refer to Ibstock
Initial Rate of Absorption (Suction Rate) (Kg/m ² /min):	Refer to Ibstock
EAN:	5036335198148