


No dimensions are to be scaled from this drawing; all dimensions and sizes to be verified on site.

No structural information is to be taken from these drawings - refer to Structural Engineer's drawings.

Rev:	Description:	Date:
A	Revised for DAC Initial Advice	May 2020
B	Revised for DAC Advice & Amenity Soc. Feedback.	Nov 2021
C	Revised for Faculty	Dec 2021
D	Revisions for Faculty App.	Feb 2022
E	Revisions for Faculty App.	Apr 2022
F	Additional information for Planning	Sept 2022

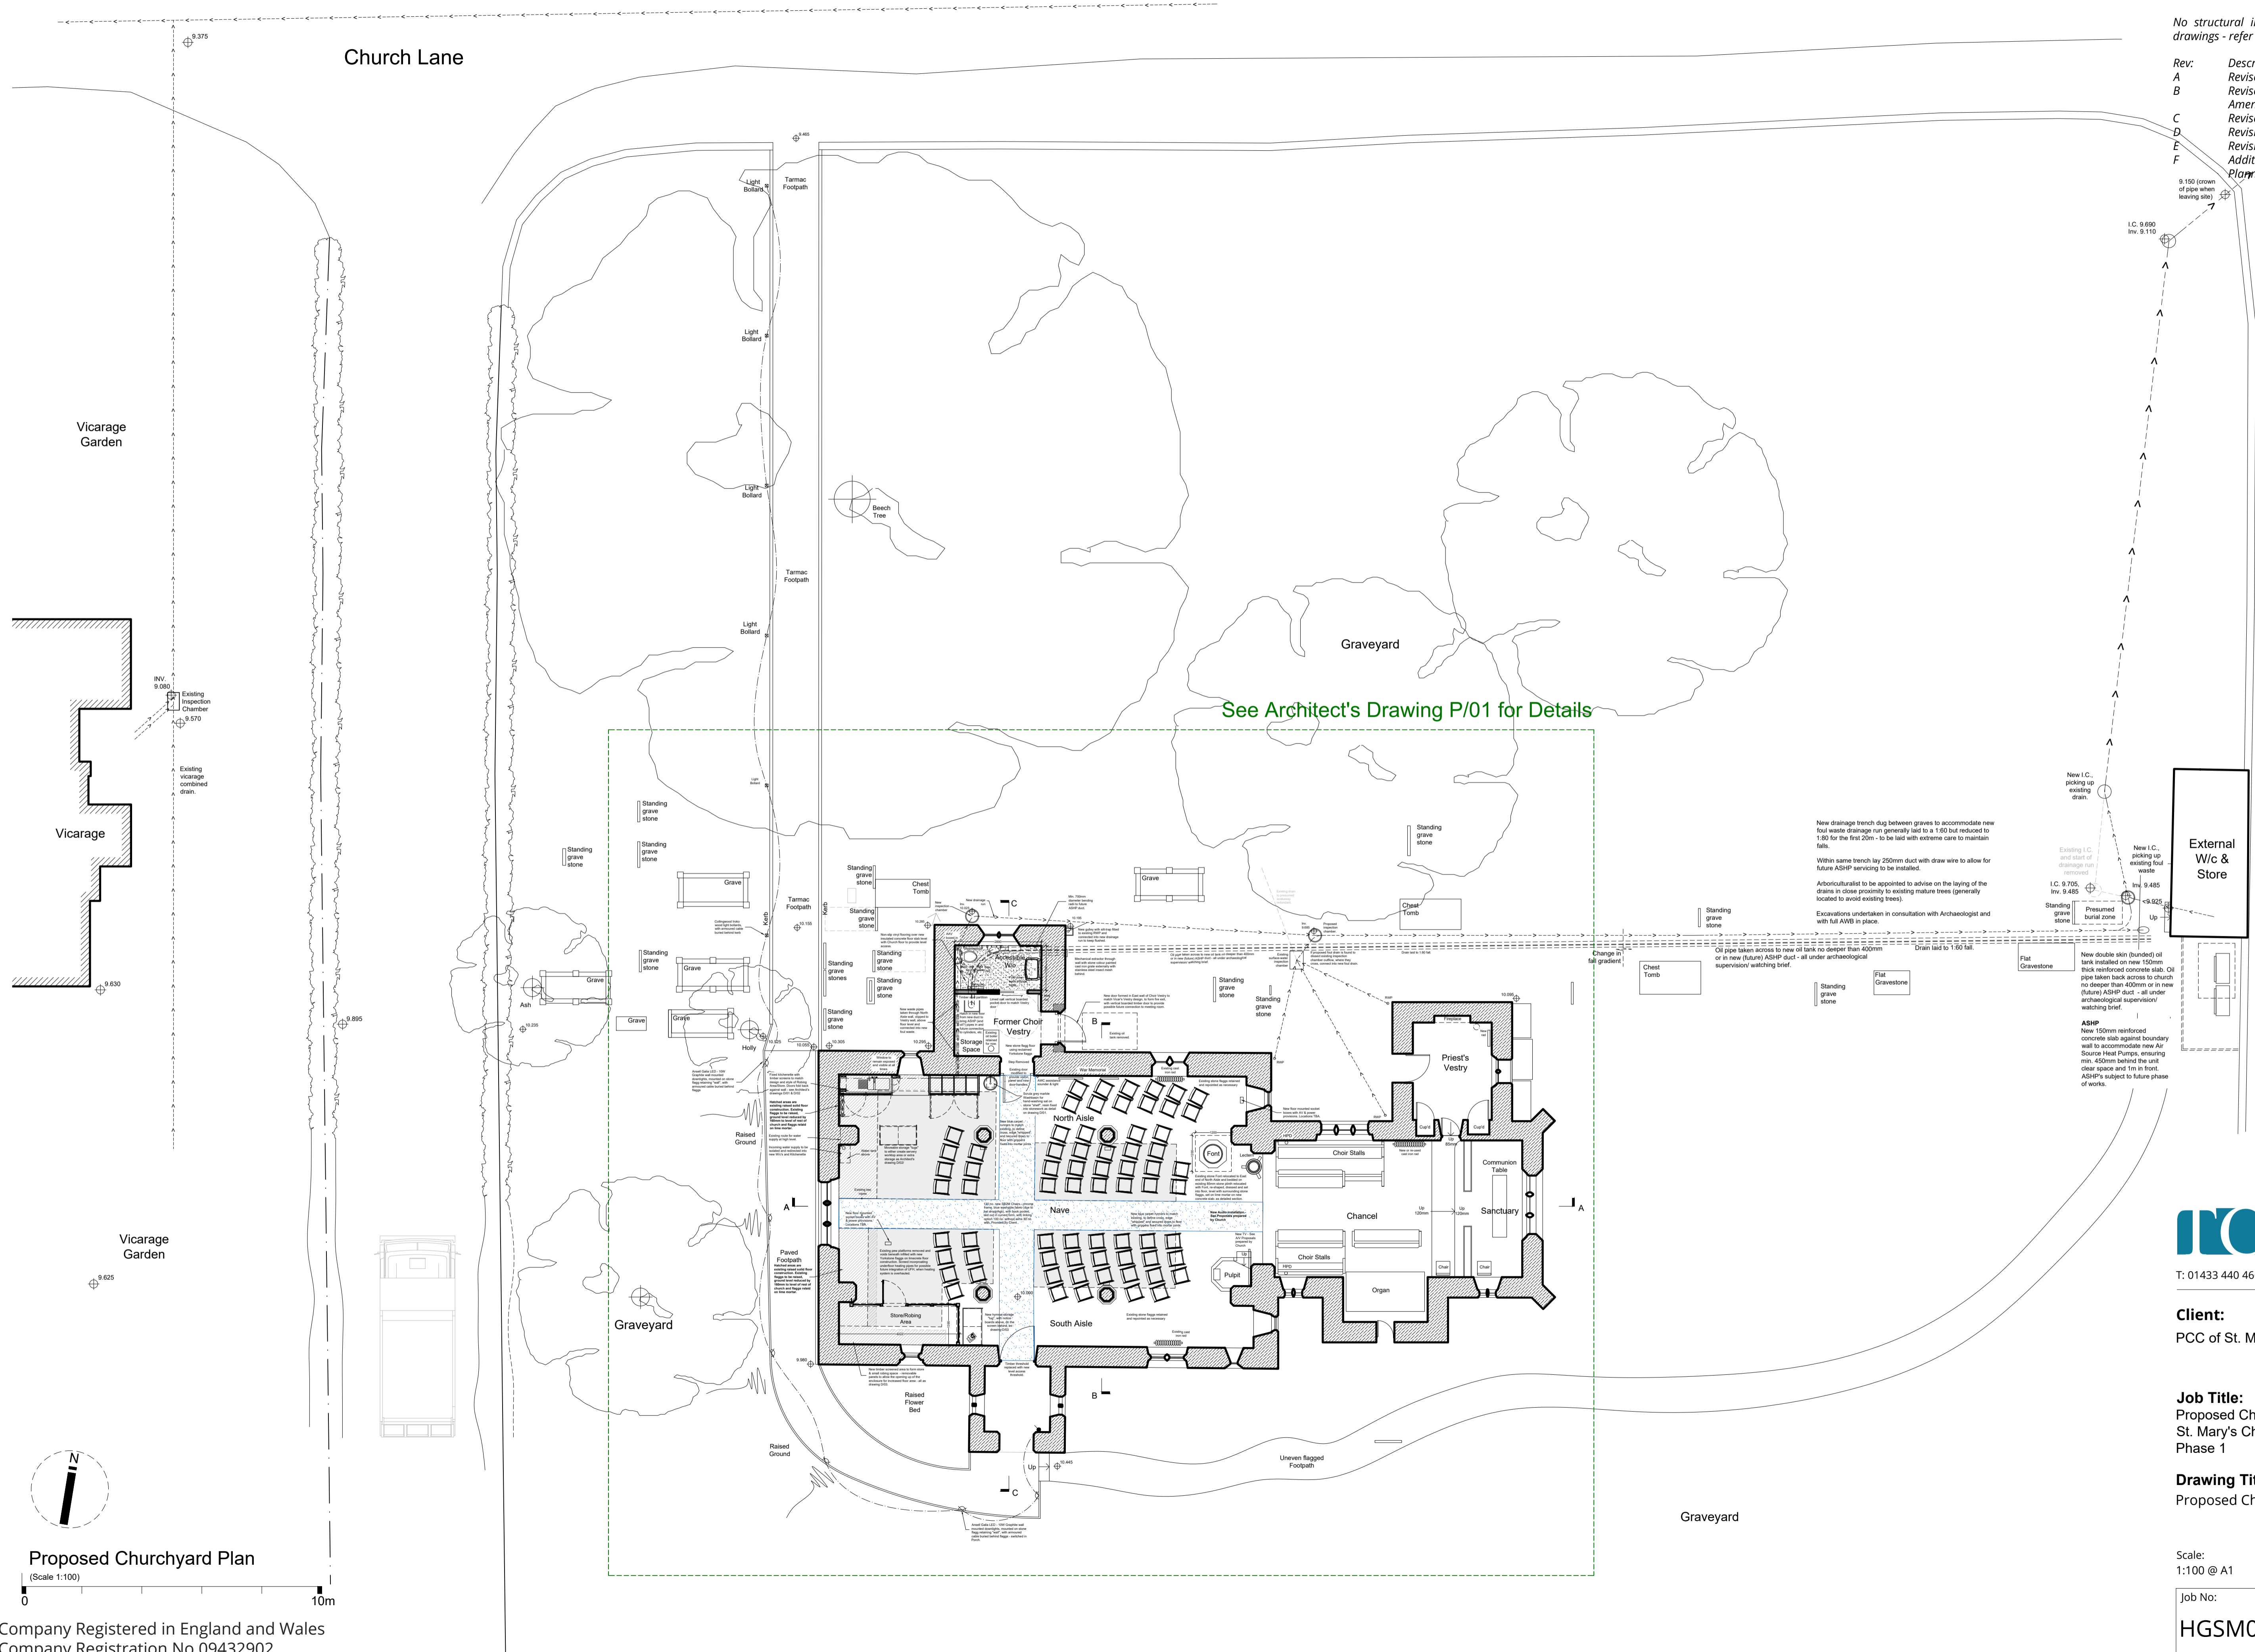

See Architect's Drawing P/01 for Details

New drainage trench dug between graves to accommodate new foul waste drainage run generally laid to a 1:60 but reduced to 1:50 for the first 20m - to be laid with extreme care to maintain falls.
 Within same trench lay 250mm duct with draw wire to allow for future ASHP servicing to be installed.
 Arboriculturalist to be appointed to advise on the laying of the drains in close proximity to existing mature trees (generally located to avoid existing trees).
 Excavations undertaken in consultation with Archaeologist and with full AWB in place.

New double skin (bunded) oil tank installed on new 150mm thick reinforced concrete slab. Oil pipe taken back across to church no deeper than 400mm or in new (future) ASHP duct - all under archaeological supervision/ watching brief.
 ASHP New 150mm reinforced concrete slab against boundary wall to accommodate new Air Source Heat Pumps, ensuring min. 450mm behind the unit clear space and 1m in front. ASHP's subject to future phase of works.

External W/c & Store

Proposed Churchyard Plan
 (Scale 1:100)

Company Registered in England and Wales
 Company Registration No.09432902

Tom Crooks Architecture Ltd
 The Dovecote, Hathersage Hall
 Business Centre, Main Road
 Hathersage, Hope Valley, S32 1BB
 T: 01433 440 466 E: info@tomcrooksarchitecture.co.uk

Client:
 PCC of St. Mary the Virgin Church, Hook

Job Title:
 Proposed Church Development Project at
 St. Mary's Church, Hook, Goole
 Phase 1

Drawing Title:
 Proposed Churchyard Plan

Scale: 1:100 @ A1
 Drawn By: TJC
 Date: May 2020

Job No:	Drawing No:	Revision No:
HGSM03	P/04	F