

**SURFACE SPECIFICATION**

- Wearing Course: Long lasting Macadam with a EPDM (Type 5 Polymeric Surface). Versatile porous rubber surface
- Sub-Base: MOT Type 1 (porous)
- Colour: RAL6005


**FENCING SPECIFICATION**

**CLD Ball Stop Netting System.**

- Height: 2000mm
- Ball Stop Netting: 100 x 100mm Poles
- Set posts: Set posts in holes 300 mm diameter x 800mm deep, filled not less than half the depth with concrete, as clause 620.
- Post centers: 5000mm
- Bottom of fencing to be approx. 60 mm above final ground level.
- Colour: RAL 6005
- Manufacturer: CLD Fencing Systems. Tel: 0555 2572038 www.cld-fencing.com



**PLAN AND ELEVATIONS - 1:200 @ A3**

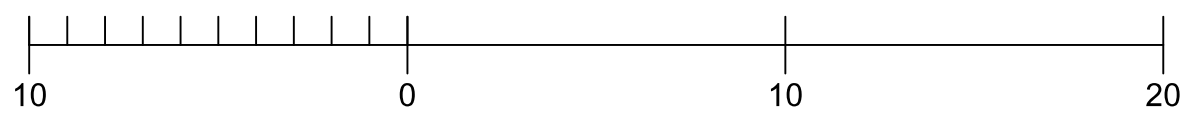

<b>Kent Conservation Limited</b> 57 Park Lane, Bonehill, Tamworth, Staffs, B78 3HZ. Mobile 07880 888822	Client <b>STANWICK HALL.</b> <b>PROPOSED TENNIS COURT.</b>	Scale 1:200@A3	2225	03
		Date Sept. 2022		
		Drawn MWK		