




LINTON PARK CC OUTDOOR NETS

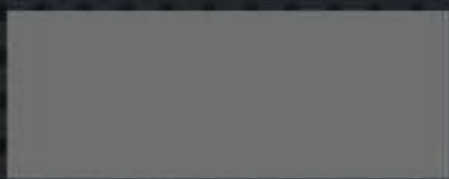

CONTENTS

- IMAGES
- LAYOUTS
- PRICE
- PROGRAMME
- CONTACT US



STAG

IMAGES




LAYOUTS

100mm TYPE 1 BASE.	100mm Reinforced Concrete Base
	100mm Type 1 Base.



LAYOUTS

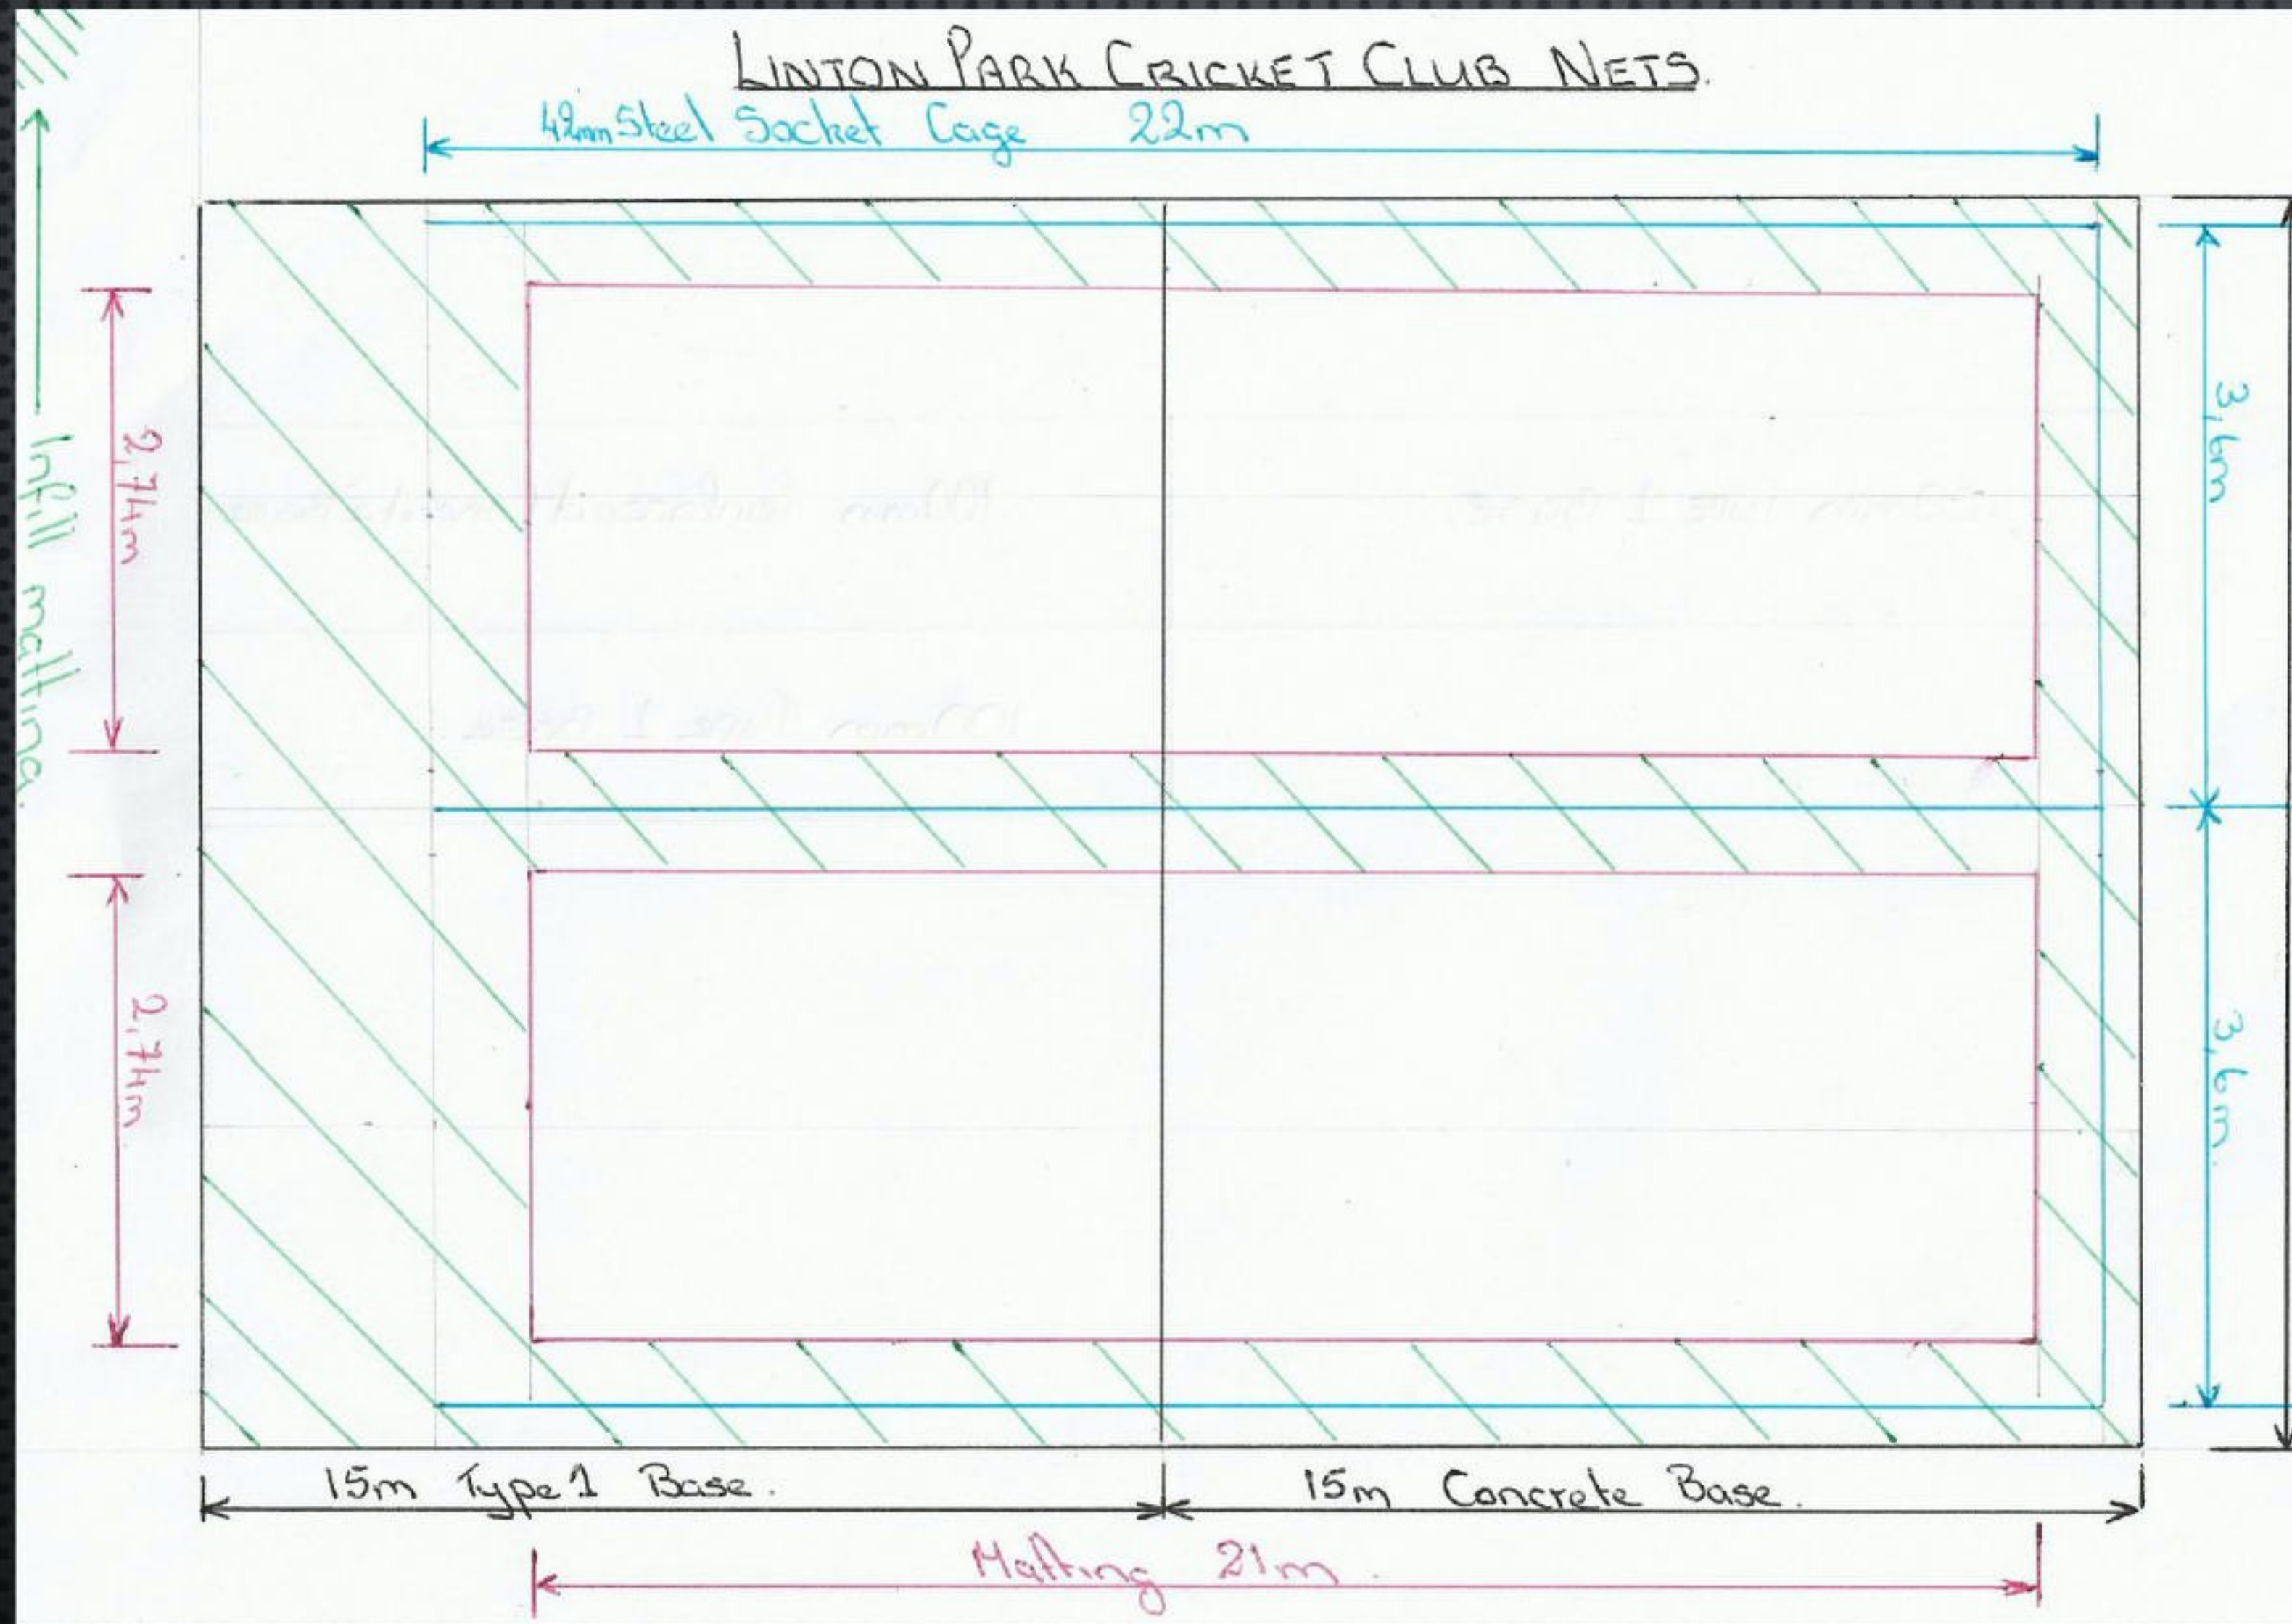



Linton Park CC Outdoor Nets

Cricket caging and matting

Cricket Cage 72 x 12 x 12 42 mm steel tube (supply only)	£	4,525.29
Cricket Shockpad / Underlay per m 2.5m wide 32m long (supply only)	£	1,247.58
Club Spec Matting per m 44m long	£	3,145.43
Shipping Costs	£	350.00
Installation (2 men at 3 days @ £200/day)	£	1,200.00
Sub total	£	10,468.30

Concrete and sand based slabs

Digger Hire with Driver / day £350	£	700.00
Compactor Hire / day £150	£	150.00
Labour Hire / Day - shuttering and laying slab 4 persons @£200/day for 3 days	£	2,400.00
Reinforcing mesh / sheet @ £31.88 / sheet. 40 nr.	£	1,275.20
Reinforcing mesh wire and small tools	£	150.00
Shuttering	£	400.00
Type 1 Stone @ £65/tonne (25 t)	£	1,625.00
laying slab and floating 4 persons at £250 / day - 2 days	£	2,000.00
Sub total	£	8,700.20

Overhead profit and prelims

OHP	£	3,833.70
-----	---	----------

Total	£	23,002.20
-------	---	-----------

** Discount offered at 10%	£	3,450.33
----------------------------	---	----------



PRICING/PACKAGES



	04/01/2021	18/01/2021	25/01/2021	19/04/2021	26/04/2021	03/05/2021	10/05/2021	17/05/2021	24/05/2021	31/05/2021
Planning Pre App (3 weeks)	█	█								
Planning Application (14 weeks)			█	█						
Mobilisation (2 weeks)					█	█				
Groundworks (1 week)							█	█		
Concrete curing (1 week)									█	
Install of matting and nets (1 week)										█

PROGRAMME



STAG

CONTACT US

