




# ecolux mini

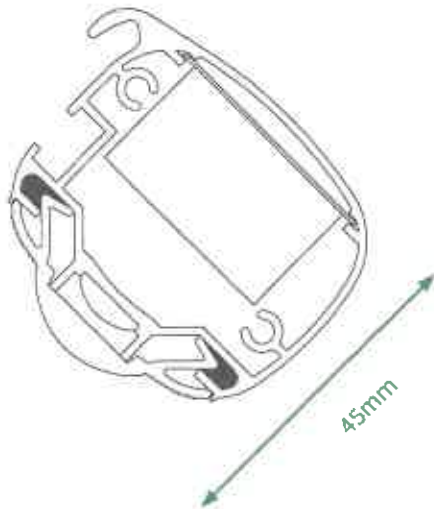

## technical specification

### LED strip

Latest high lighting chip giving 1650 Lumens per metre LED output.

Only 14.4 watts per metre power consumption 75% energy saving compared to Fluorescent.

24 volt input, less current less voltage drop.

6000k cool white or 3000k warm white 120 degree angle.

IP65 protected, 50,000 hours+ lamp life.

5 year Warranty.

Full CE certification and ROHS compliant.

### Drivers

Epoxy encapsulated fully isolated case with IP67 protection.

Constant voltage design.

Short circuit, over current, over voltage protection.

Fitted onto quick release slide in Gear Trays.

Full CE certification and ROHS compliant.

### Light Fitting

Specially designed 45mm aluminium extrusion supplied up to 6000mm lengths which can be joined together using cast aluminium connectors.

Die cast aluminium end caps with rear cable entry Standard 300mm multi brackets.

Snap-in polycarbonate 90 degree magnifying lens diffuser.

Casing sealed and certificated to IP65.

Full CE certificate and 5 year parts warranty.

Conforms to BS EN 60598-1:2015 and BS EN 60598-2-1:1989 'UK Deviations Only'.

(The manufacturer's reserve the right to alter specifications without prior notification).

## options

Cold or Warm White LED colour.

RGB RF remote control colour change available on request.

Non-standard brackets available upon request.

Standard and non-standard colours.

Photo electrical cell switches.

**Price will include:** Polyester powder coated black or white and 300mm multi brackets.

Protected by UK registered design application 6021380.

Telephone: 01922 721 133  
Facsimile: 01922 659 545



Portland Lighting  
Units A2 & A3  
Walsall Enterprise Park  
Regal Drive  
Walsall  
WS2 9HQ