
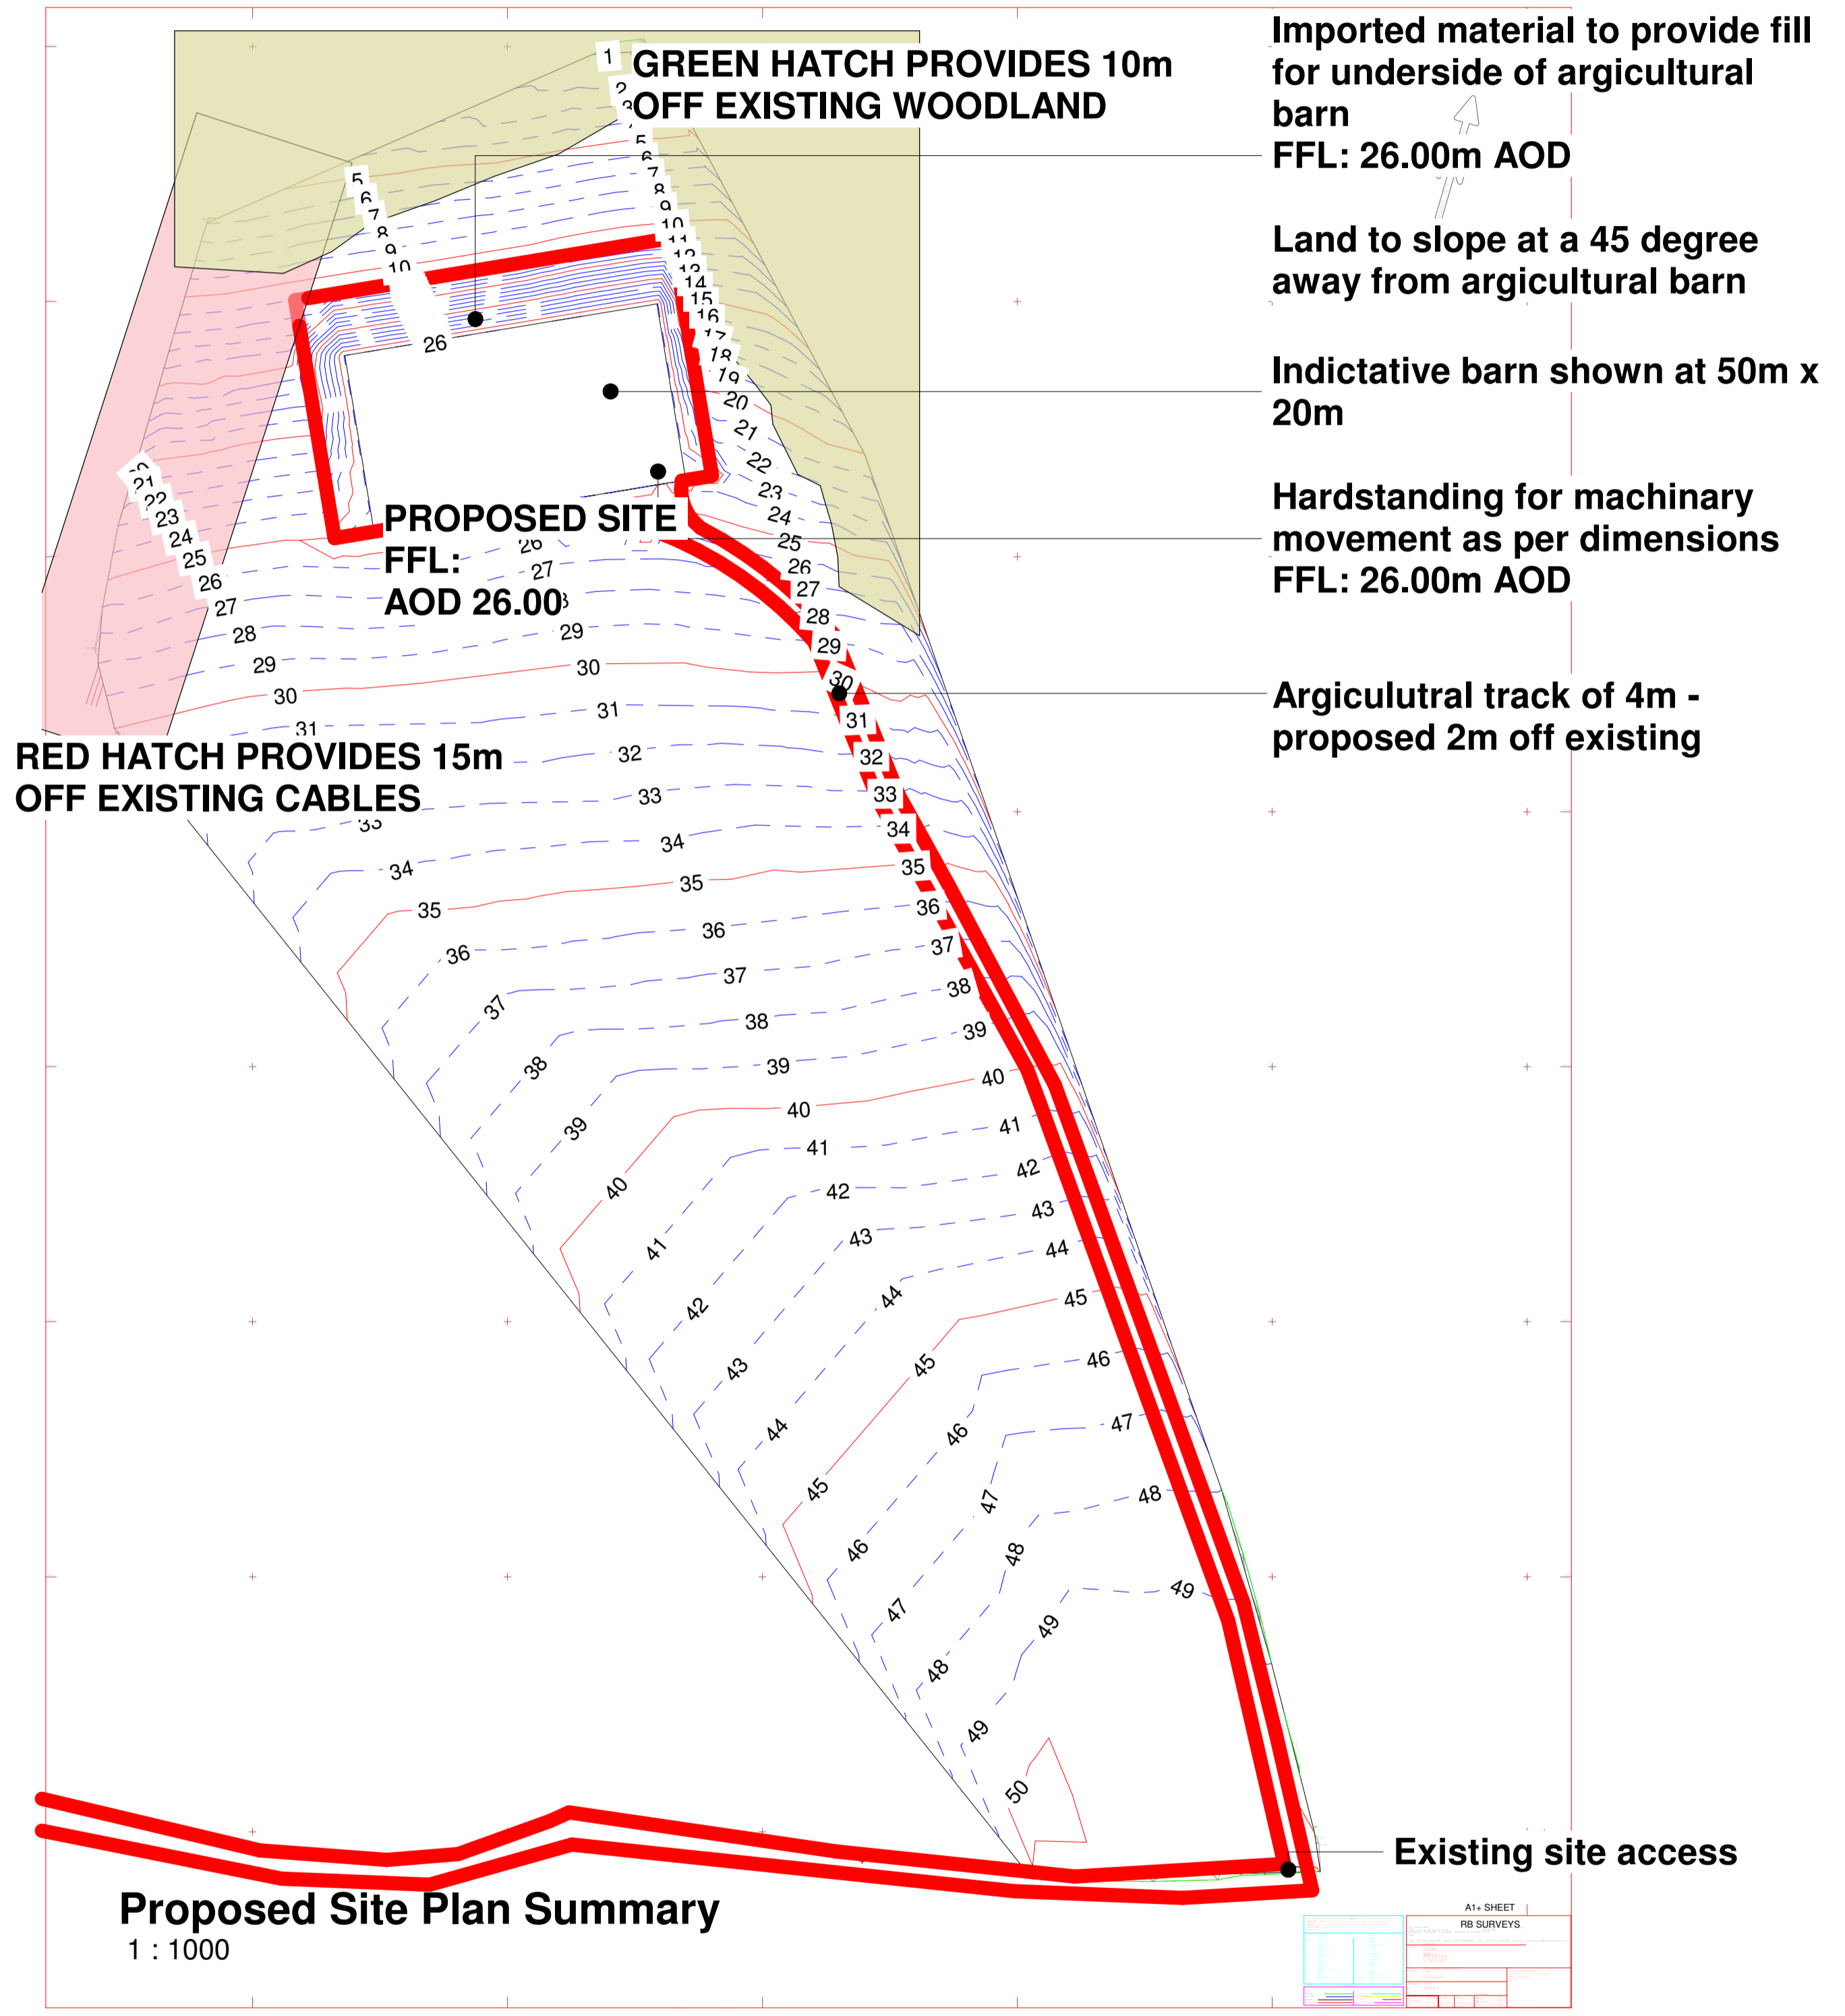


| Cut and Fill Schedule |           |             |              |
|-----------------------|-----------|-------------|--------------|
| Name                  | Cut       | Fill        | Net cut/fill |
| Proposed Site         | 151.58 m³ | 19537.28 m³ | 19385.70 m³  |
| Grand total: 1        | 151.58 m³ | 19537.28 m³ | 19385.70 m³  |

- Project Notes**
- Site Area: 4878m²
  - Barn shown indicatively

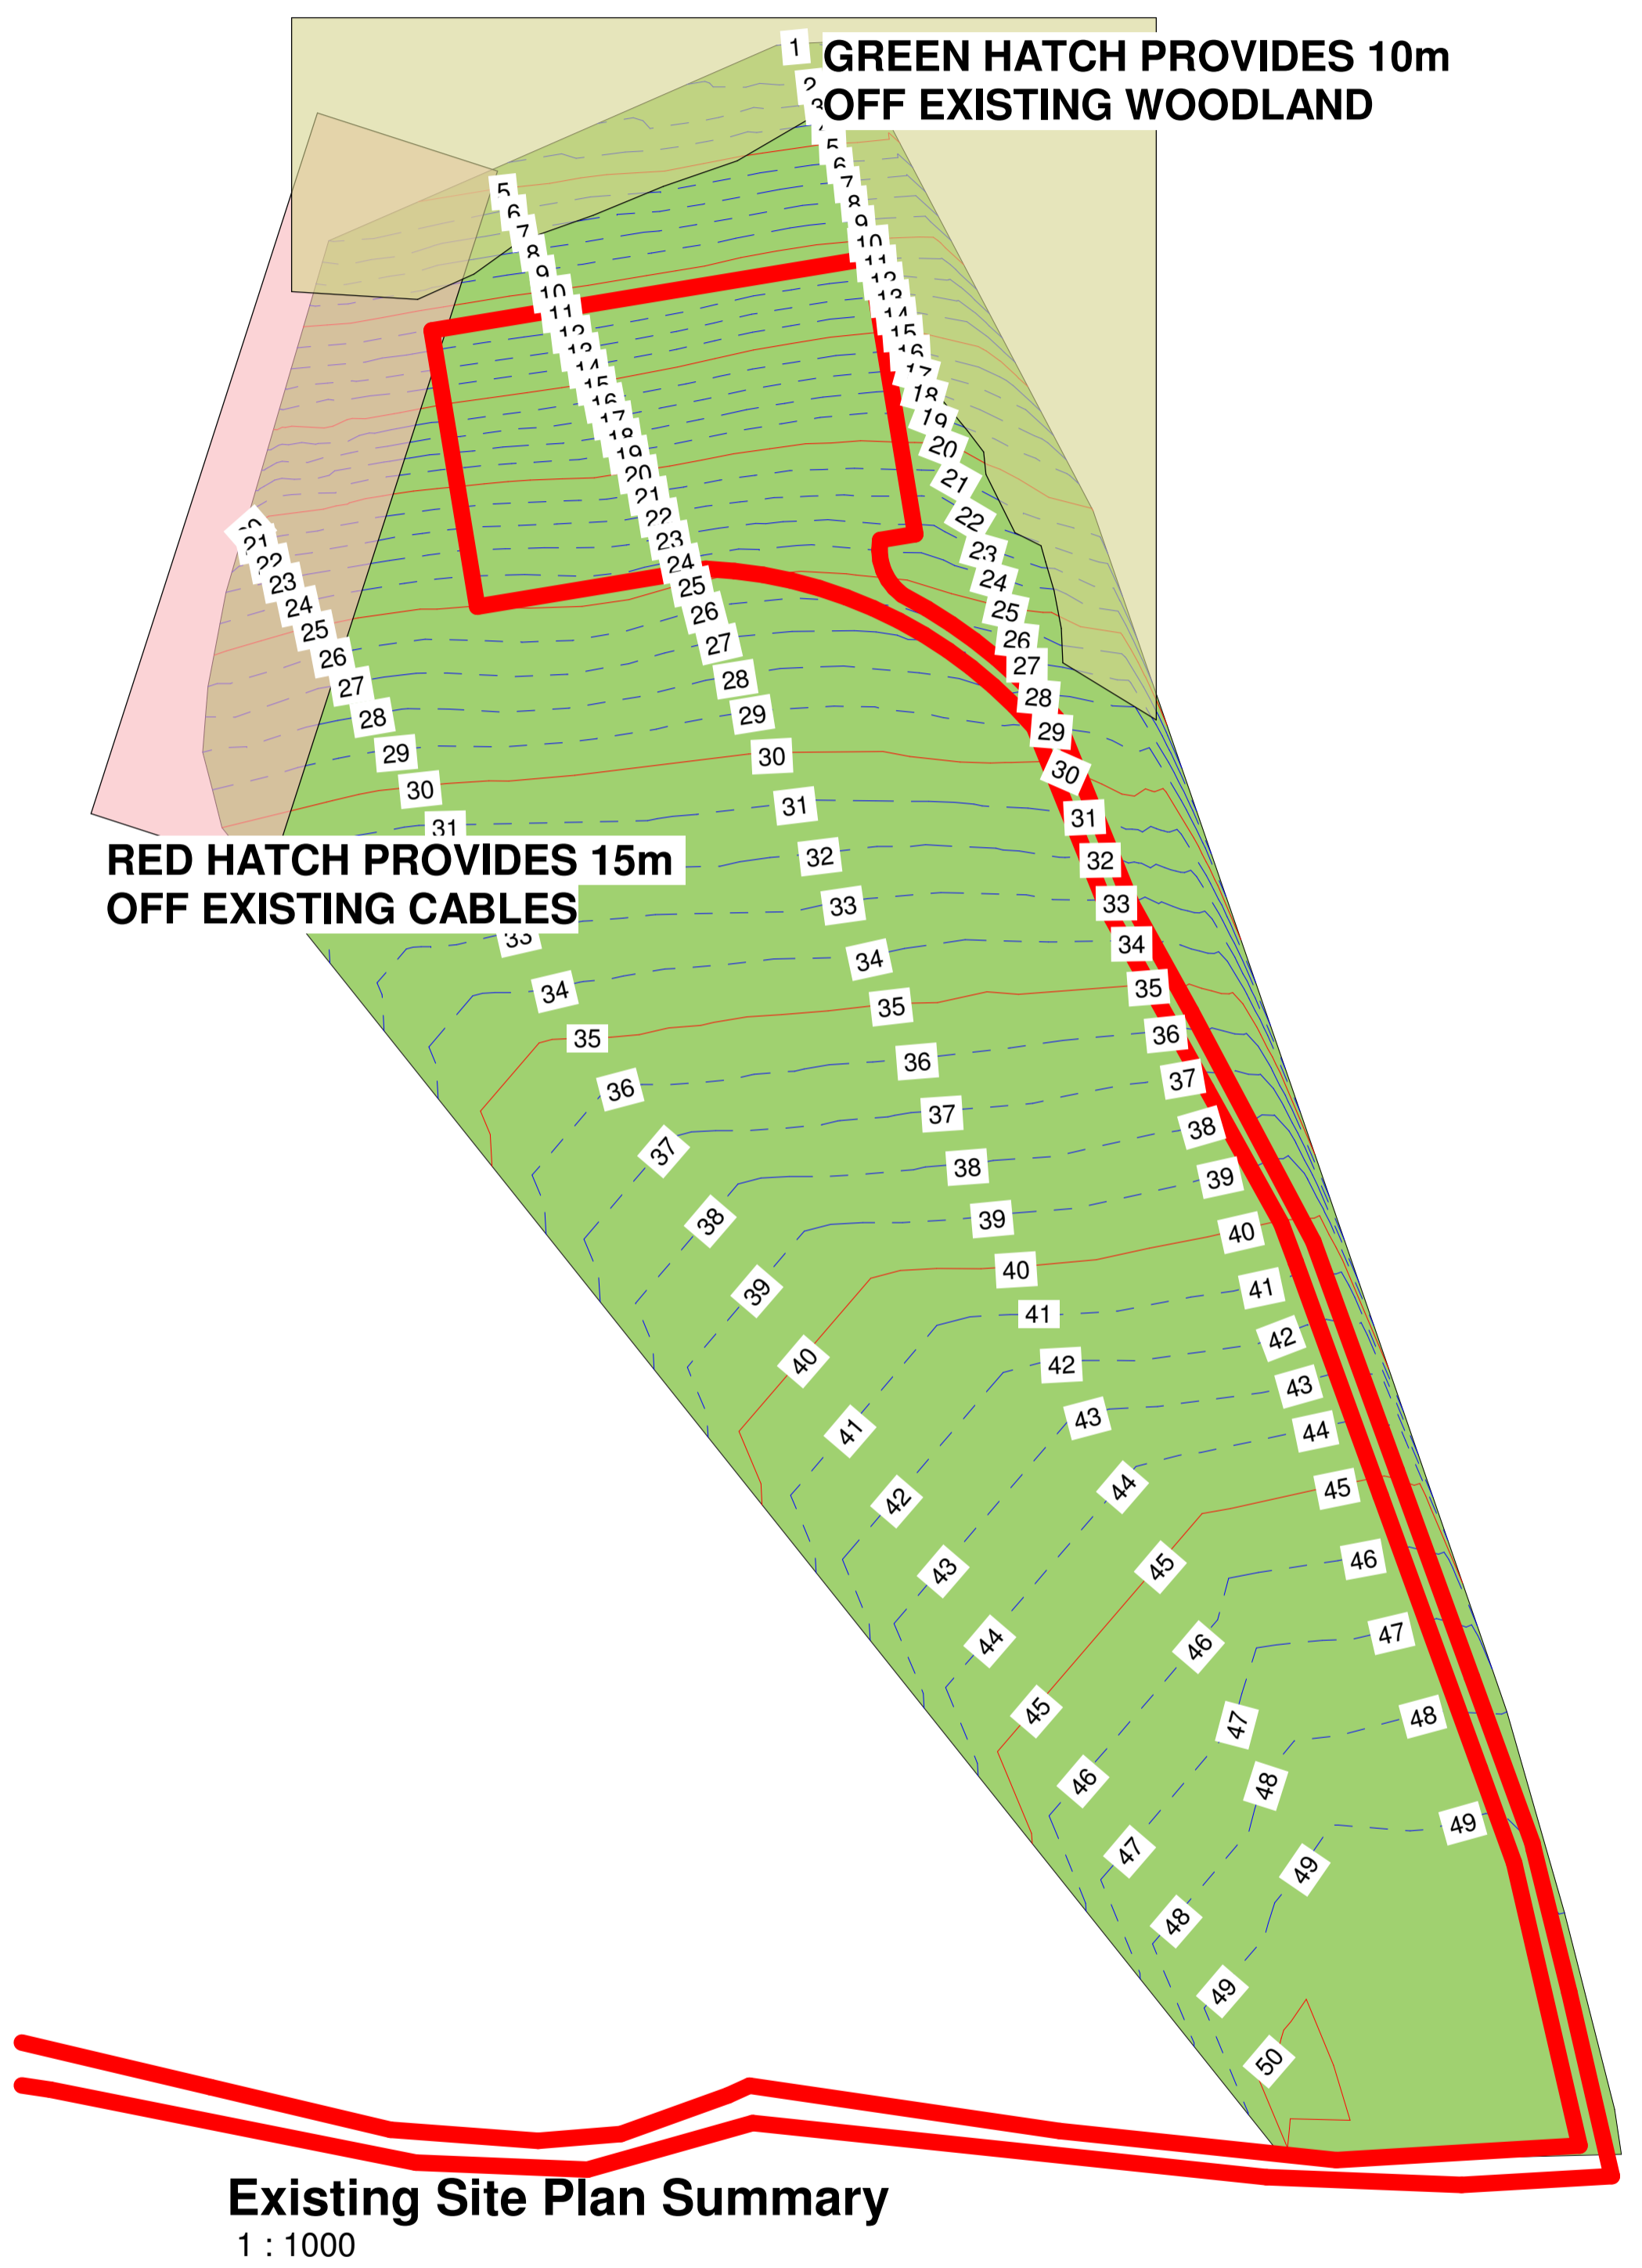

- Imported material to provide fill for underside of agricultural barn  
FFL: 26.00m AOD
- Land to slope at a 45 degree away from agricultural barn
- Indicative barn shown at 50m x 20m
- Hardstanding for machinery movement as per dimensions  
FFL: 26.00m AOD
- Agricultural track of 4m - proposed 2m off existing

| REV | DESCRIPTION      | DATE      | DRAWN |
|-----|------------------|-----------|-------|
| A   | BARN AOD ALTERED | 24 MAY 23 | NH    |



GORDON COURT EAST,  
MILLFIELDS, PLYMOUTH  
PL1 3JB

studio@ercle.co.uk  
01752 223686

CLIENT : KERNOW SERVICES

PROJECT : HIGH DOWN PENSILVA

DRAWING : Existing and Proposed Site Comparison

SCALE : 1 : 1000 @ A1 DRAWN : NH

NUMBER : 2023-31 1001A