




PT3111002

LED bollard fitting, height 800mm and Ø 70mm, in AISI 316L stainless steel. Single lighting fixtures. Power supply included

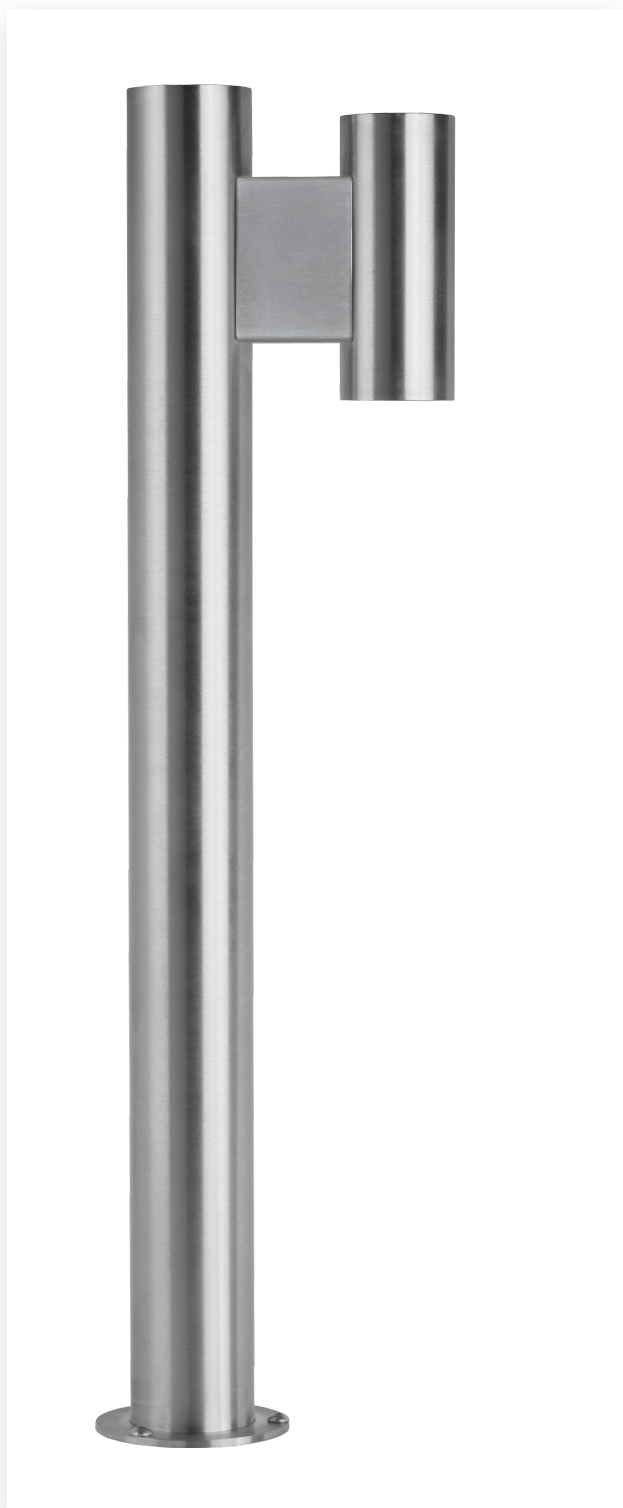

REGISTRY

Min order quantity 1

EAN Code 8014950103041

TECHNICAL DATA

No. Led 1 LED MULTICHIP

Lamp type LED

Optics 45°

Shock resistance IK08

Frequency 50/60Hz

Protection degree IP66

Diffuser type TRANSPARENT
TEMPERED GLASS

Via F. Palazzoli, 31
25128 Brescia BS – Italia
Telefono: +39 030 2015.1

| | |
|------------------------------------|--------------------------------|
| Color temperature | 3000 K |
| Power Supply Unit | INTEGRATED |
| Luminous flux (TJ=25°C) | 500 lm |
| Rated Operating Voltage | 220V-240V |
| Energetic class | A/A+/A++ |
| Surface Finishing | PAINTING / ELECTROPOLISHING |
| Execution | A4 |
| Power on label (lighting) | 5W |
| Fixture power | 5 |
| Insulation Class | II |
| ATTACHMENTS | |
| <u>DXF drawing</u> | |
| <u>LDT photometric data</u> | |