


W009

snug

timber window to bay at brickwork extension to main house, 4-part window with 2no fixed, 2no. side hung openers, stone external sill, timber roof structure over.


Proposed works: retain and refurbish as required, secondary glazing to inside.

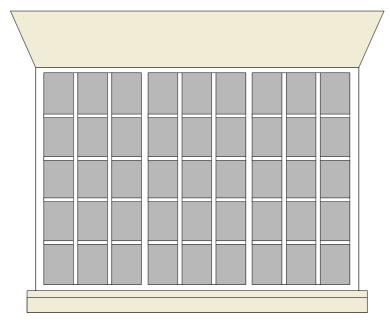

W010

sitting room small panel metal window to brickwork extension to main house, 3-part window with 2no fixed, 1no. side hung opener, stone external sill, stone lintel.

Proposed works: retain and refurbish as required, secondary glazing to inside.




W011

kitchen / dining

small panel metal window to brickwork extension to main house, 2-part window with 1no fixed, 1no. side hung opener, stone external sill, stone lintel.

Proposed works: retain and refurbish as required, secondary glazing to inside.




W013

kitchen / dining

timber window to brickwork extension to main house, 2-part fixed window, brick external sill, timber lintel.

Proposed works: retain and refurbish as required, secondary glazing to inside.




W014

kitchen / dining

timber window to brickwork extension to main house, 2-part fixed window, brick external sill, timber lintel.

Proposed works: retain and refurbish as required, secondary glazing to inside.



W015

sitting room timber window to brickwork extension to main house, 2-part side hung opening window, brick external sill, stone lintel.

Previously a door opening.

Proposed works: retain and refurbish as required, secondary glazing to inside.



W016

stair

Proposed works: retain and refurbish as required, secondary glazing to inside.


© 2021 RAISE ARCHITECTS LTD

All rights reserved All stated dimensions shall be verified on site.

RAISEARCHITECTS.COM

Any discrepancies shall be reported to the project architect in writing. This drawing shall only be used in relation to the project stated below.

KEY / NOTES

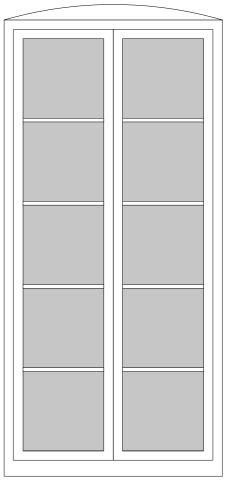


W012 - proposed french door

W012


kitchen / dining

proposed timber french door to replace existing sash window. stone external sill, brick arch lintel.

Proposed works: replace existing window with proposed french door



small pane metal window to brickwork extension to main house, 2-part side hung opening window, stone external sill, stone lintel.




Proposed window W017

kitchen / dining

small pane metal window to brickwork extension to main house, 2-part side hung opening window, stone external sill, stone lintel.

(To match W011)



W012 - existing window to be replaced



ARCHITECTS

PROJECT

Proposed alterations to the Farmhouse at Churton Hall Farm, Churton, Chester CH3 6LR

DRAWING Window schedules 03 Residential unit 02 Ground floor			
SCALE	DATE	DRAWN BY	CHECKED BY
1:20@A2	JUN 21	AB	AF
DRG N°			REV
439-PL/FH-12 -			