



KEY / NOTES

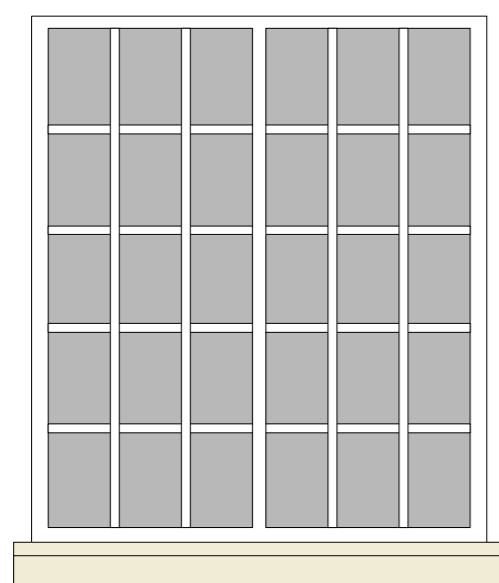

W109

bedroom 03
 small pane metal window to brickwork extension to main house, 2-part window with 1no fixed, 1no. side hung opener, stone external sill, no visible lintel.


Proposed works:
 retain and refurbish as required, secondary glazing to inside.

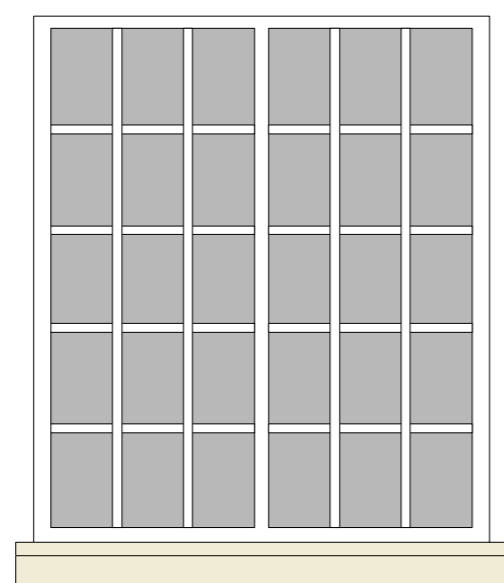

W110

bedroom 02
 small pane metal window to brickwork extension to main house, 2-part window with 1no fixed, 1no. side hung opener, stone external sill, no visible lintel.


Proposed works:
 retain and refurbish as required, secondary glazing to inside.

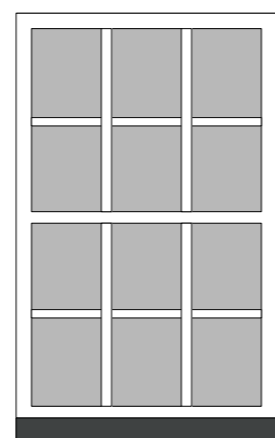

W111

bathroom
 small pane metal window to brickwork extension to main house, 2-part openable window, timber external sill, no visible lintel.

Proposed works:
 retain and refurbish as required, secondary glazing to inside.

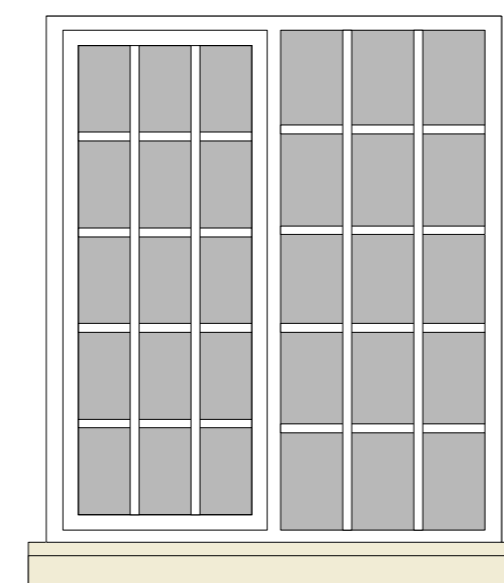


W112 proposed


W112

ensuite
 small pane metal window to brickwork extension to main house, 2-part window with 1no fixed, 1no. side hung opener, stone external sill, no visible lintel.

Proposed works:
 retain and refurbish as required, reinstate pane that had been replaced in the past, secondary glazing to inside.

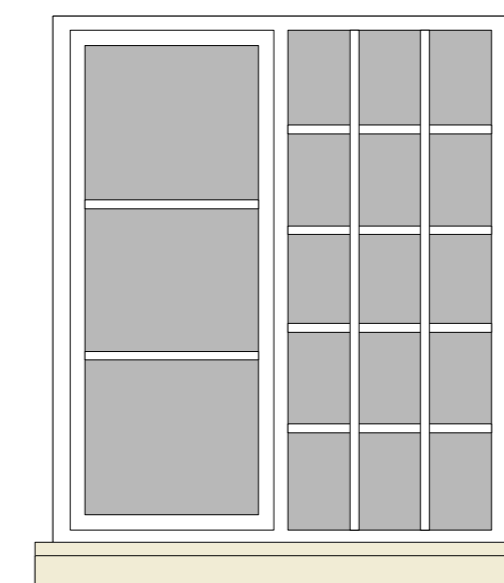


W112 existing

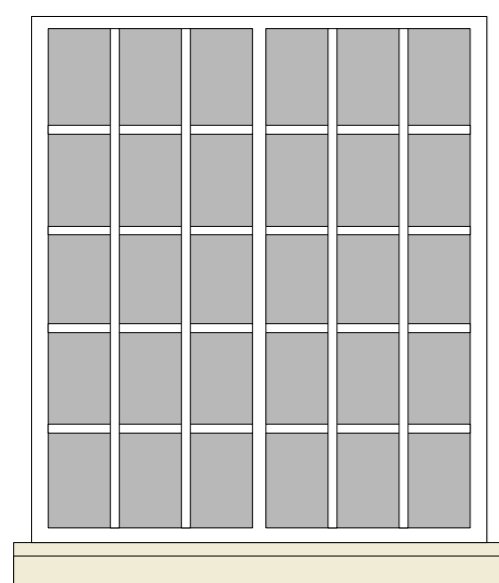

W113

bedroom 01
 small pane metal window to brickwork extension to main house, 2-part window with 1no fixed, 1no. side hung opener, stone external sill, no visible lintel.


Proposed works:
 retain and refurbish as required, secondary glazing to inside.

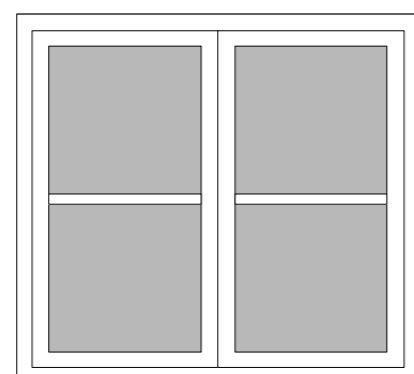

W114

hall
 timber window to brickwork extension to main house, 2-part side hung opening window, no external sill, timber lintel.


Proposed works:
 retain and refurbish as required, secondary glazing to inside.

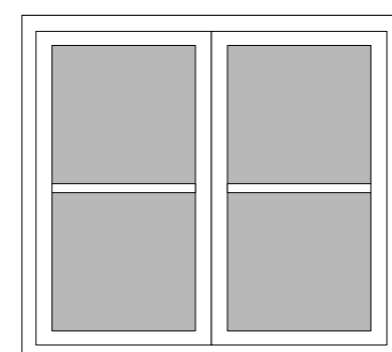

W115

stair
 timber window to brickwork extension to main house, 2-part side hung opening window, no external sill, timber lintel.

Proposed works:
 retain and refurbish as required, secondary glazing to inside.

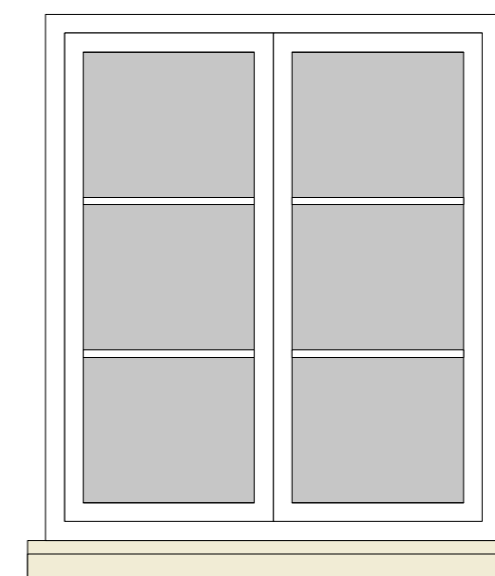

Proposed windows W116 - W119 (4no. windows)

bedroom 01, hall
 small pane metal window to brickwork extension to main house, 2-part side hung opening window, stone external sill, brick / steel lintel.

(To match windows to gable and rear elevation)

REV	DESCRIPTION	DATE
-----	-------------	------

RAISE
 ARCHITECTS

PROJECT
Proposed alterations to the Farmhouse at Churton Hall Farm, Churton, Chester CH3 6LR

DRAWING
Window schedules 04 Residential unit 02 First floor

SCALE	DATE	DRAWN BY	CHECKED BY
1:20@A2	JUN 21	AB	AF
DRG N°	REV		

439-PL/FH-13 -