

EDGEGLIDE⁺

INLINE SLIDING DOOR

EXPAND
YOUR
HORIZONS



Arkay Windows is a specialist large-scale fabricator *with over 45 years* experience based in Watford, North West London.

Through growth built on putting our customers first, we have risen to supply some of the country's biggest retail companies, contractors and commercial installers.

 **Arkay Windows**




Watford: 01923 803923
London: 020 8889 6821

edgeglide@arkaywindows.com
arkaywindows.com

EdgeGLIDE+ V2

Expand your horizons with this slim, thermally efficient sliding door.

 **Arkay Windows**



 **Arkay Windows**


EDGEGLIDE⁺

THE AMAZINGLY
SLEEK NEW INLINE
SLIDING DOOR

Choose your design, choose your view. EdgeGlide is the sleek sliding door which combines top quality, colour-matched hardware with elegant design. So the look of your door can match the look of your outdoors.

- Modern Square Look
- Ultra Slim 35mm Interlock
- Up to 2.2m x 2.6m per panel
- Stylish Colour-Matched Hardware
- U-Value From 1.2 W/m²K
- Double or Triple Glazing
- Multi-Point Locking
- 70mm Frame Depth For Easy Replacement
- Kit Frame and Sash Option For Full Site-Assembly

EDGEGLIDE⁺
INLINE SLIDING DOOR

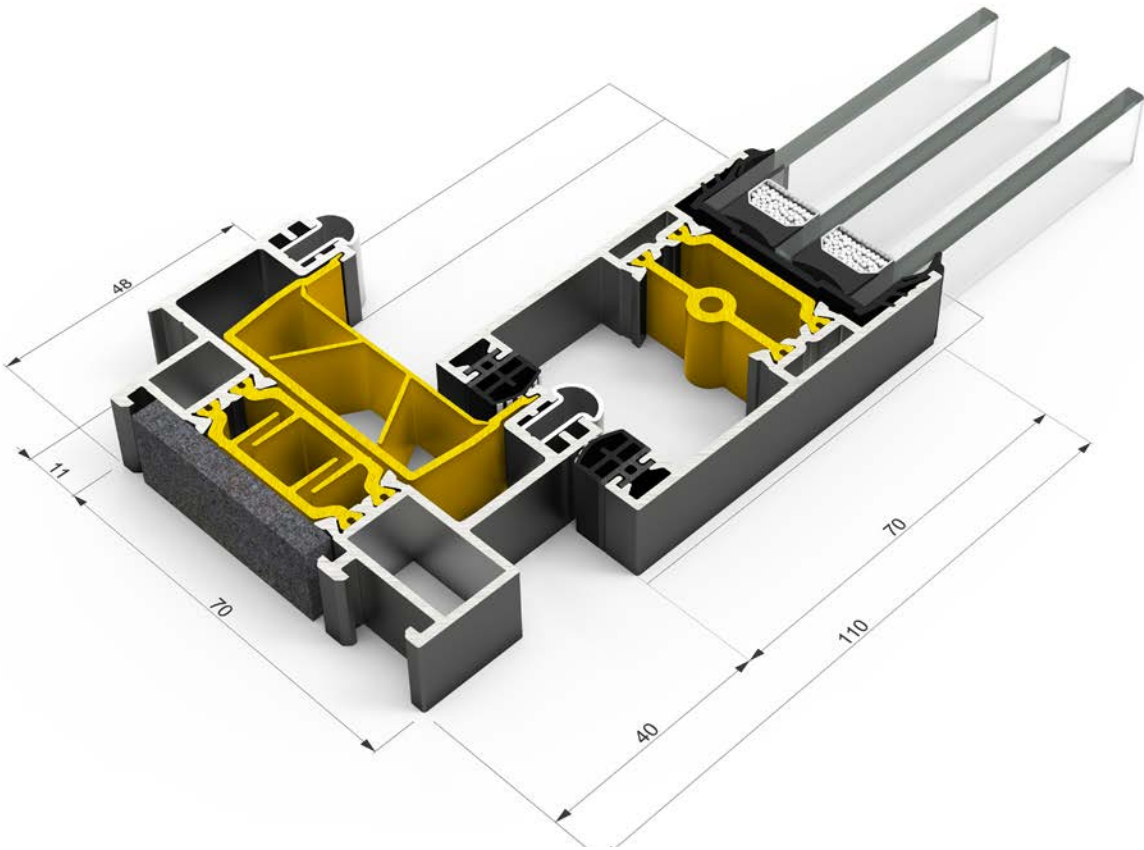

**Size
Limits**

Maximum Panel Width	2200 mm
Maximum Panel Height	2600 mm
Maximum Panel Weight	240 kg

THRESHOLD HEIGHT	48 mm	
GLAZING THICKNESS	14 - 36 mm	
GLAZING METHOD	Wrap-Around	
GLAZING	Double or Triple	
SIGHTLINE (TYPICAL)	35 mm	
FRAME DEPTH	2 RAIL	70 mm
FRAME DEPTH	3 RAIL	126 mm

PERFORMANCE	
U-VALUE	From 1.2 W/m ² K
AIR PERMEABILITY	Class 4
WATER TIGHTNESS	Class 7A
WIND RESISTANCE	Class C5
ENHANCED SECURITY	Multi-Point Locking
MAXIMUM ACOUSTIC INSULATION	40 dB Rw