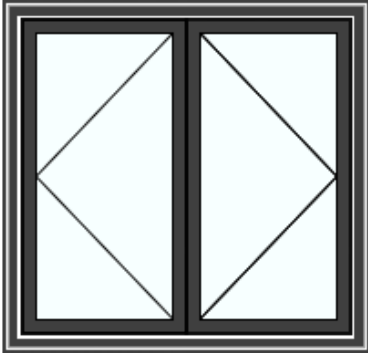
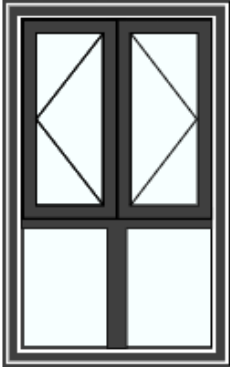


<p style="text-align: center;"><u>South east GF X 3</u></p>  <p>1) IMAGES ARE EXTERNAL VIEW AND ARE FOR ILLUSTRATION ONLY</p>	<p><u>Frame</u> Style: S25 Casement window (Alitherm 500) Number of items: 3 Frame: Aluminium Frame style: Square Bead style: Square Drainage: Concealed Cill: 150mm Fitting: New opening Internal window board: None Head Extension: 42mm Frame extender: None () Coupler: None () Bay Post: None () Flying mullion: Yes Mastic: Standard Trim: None <u>Spec</u> Hinge: Egress Handle: Colour coded Trickle vent: 1 Trickle vent position: Frame Dummy sash: No Dummy fanlight: No</p>	<p><u>Glass</u> 1: 4mm / 4mm toughened glass low E 2: 4mm / 4mm toughened glass low E <u>Design</u> Glass pattern: Clear Colour: Std Matt BL (Ext/Int) Spacer colour: Black <u>Measurements</u> Total width: 1250mm Total height: 1200mm Mullion: 625mm</p>
<p style="text-align: center;"><u>South East 1st Floor X 3</u></p>  <p>1) IMAGES ARE EXTERNAL VIEW AND ARE FOR ILLUSTRATION ONLY</p>	<p><u>Frame</u> Style: S156 Casement window (Alitherm 500) Number of items: 3 Frame: Aluminium Frame style: Square Bead style: Square Drainage: Concealed Cill: 150mm Fitting: New opening Internal window board: None Head Extension: 42mm Frame extender: None () Coupler: None () Bay Post: None () Flying mullion: Yes Mastic: Standard Trim: None <u>Spec</u> Hinge: Egress Handle: Colour coded Trickle vent: 1 Trickle vent position: Frame Dummy sash: No Dummy fanlight: No</p>	<p><u>Glass</u> 1: 4mm / 4mm toughened glass low E 2: 4mm / 4mm toughened glass low E 3: 4mm / 4mm toughened glass low E 4: 4mm / 4mm toughened glass low E <u>Design</u> Glass pattern: Clear Colour: Std Matt BL (Ext/Int) Spacer colour: Black <u>Measurements</u> Total width: 1260mm Total height: 2040mm Transom: 1240mm Mullion: 630mm</p>