

Quotation Prepared for: Rich Hillier
62 High Street
Lenham
Maidstone
Kent
ME17 2QB

Scope of Project:

Replacement - Carefully remove existing items, prepare openings and supply and fit replacements. To include all making good of aperture ready for final decoration by others. All installed in full compliance with Building Regulations Document L (2010 Edition) by our trained and experienced installers.

Site Address: As quotation

Technical Specification:

All products in multi-layer Engineered Meranti sections for added stability. Factory glazed with argon/krypton gas filled double glazed units featuring soft-coat energy saving glass. Fully factory finished with high performance, micro-porous paint treatments. Entrance doors fitted with multi-point claw locks and robust, adjustable hinges. Flush casement windows with high security multi-point locking systems and locking handles. French doors fitted with multi-point claw locks to master doors, flush bolts to slave door. Robust, adjustable hinges.

Item	Qty	Item Reference	Product	Style	Remarks
1	1	Kitchen 1	Flush Casement Window	DL2	Special Item. Monkeytail - Black. Diamond Leaded Lights. Dark Oak
2	1	Kitchen 2	Flush Casement Window	DL2	Special Item. Monkeytail - Black. Diamond Leaded Lights. Dark Oak
3	1	Lounge	Flush Casement Window	DL47	Monkeytail - Black. Diamond Leaded Lights. Dark Oak Finished.
4	1	Middle Bedroom	Flush Casement Window	DL21	Monkeytail - Black. Diamond Leaded Lights. Dark Oak Finished.
5	1	Master Bedroom	Flush Casement Window	DL47	Monkeytail - Black. Diamond Leaded Lights. Dark Oak Finished.
6	1	Bathroom	Flush Casement Window	DL2	Monkeytail - Black. Diamond Leaded Lights. Dark Oak Finished.
7	1	Bedroom Dormer	Flush Casement Window	DL21	Monkeytail - Black. Diamond Leaded Lights. Dark Oak Finished.
8	1	Kitchen 3	Flush Casement Window	DL2	Special Item. Monkeytail - Black. Diamond Leaded Lights. Dark Oak
9	1	Entrance Door	Entrance Door	IN-A-Staverton	Dark Oak Finished.
10	1	French Door	French Door	OUT-A-Apsley	Cottage - Black. Dark Oak Finished.
11	1	For 4. Flush Casement Window (Middle	Trim	Flat - 20x150 2350mm	Dark Oak Finished.
12	1	For 5. Flush Casement Window (Master	Trim	Flat - 20x150 2350mm	Dark Oak Finished.
13	12	Finishing trim	Trim	Cover Strip - 8x70 2350mm	Dark Oak Finished.

All prices are inclusive of the current Timber Windows promotion

Prepared By:
Dean Allen
Sales Advisor

Your Project is covered by:



Valid upon registration. Ask for full details

QUOTATION VALID FOR: 14 DAYS

Lead Time:
* Approximately 11-13 weeks from Sign Off of Final Detail.

Terms:
Deposit with order: 50%
Stage Payment required before delivery due: 40%
Balance to installers on day of completion: 10%

Your Guarantees:

Fungal & Insect	Sealed Unit	Hardware	Workmanship	Paint	Stain
					
30 YEARS GUARANTEE	10 YEARS* GUARANTEE	10 YEARS GUARANTEE	10 YEARS GUARANTEE	12 YEARS GUARANTEE	UP TO 6 YEARS* GUARANTEE

* 5 years for 14mm double glazed units. * 6 years for Meranti & Redwood. 1 year for Oak. Not applicable to putty finished products.

Item: 1

FLUSH CASEMENT WINDOW IN MERANTI (SPECIAL)



Quantity: 1

Style: DL2

Item Reference: Kitchen 1

Quote Ref: 456/3 V3

Key Features:

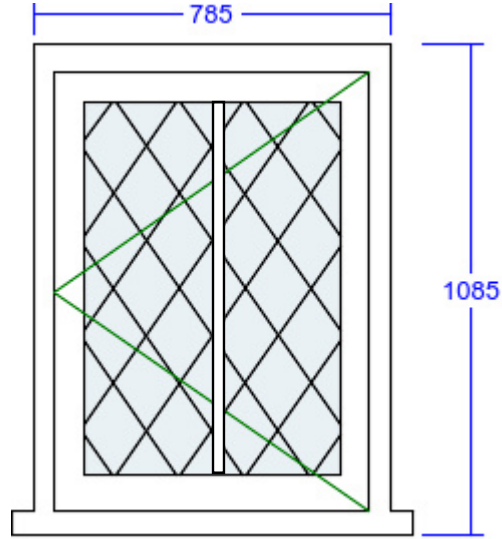

Detailed Specification:

VIEWED FROM OUTSIDE. POINT OF ARROW DENOTES HINGE POSITION.

Width (mm)	785	Head Drip	Yes	Glass Pattern	Clear
Height (mm)	1085	Head Drip Horns	No		
Frame Head Size	75mm	Factory Fit Head Drip	Yes	Glass Type	4mm Annealed/10mm Krypton/4mm Annealed LowE (18mm)
Feature Mould	Ovolo	Add Ons Required	No	Glazing Features	Diamond Leaded Lights (145mm x 210mm)
Colour	Dark Oak	Trickle Vent Quantity	1	Lead Profile	Oval
Cill	145mm x 68mm (Ext 55mm x 38mm)	Trickle Vent Size	EA 3000	Lead Size	6mm
Cill Species	Engineered Meranti	Trickle Vent Location	Head of Frame	Lead Joints	Overlay
Cill Horns	50mm Each Side	External Grille Colour	Brown	Lead Finish	Standard
Factory Fit Cill	Yes	Window Board Required	No	Handle	Monkeytail - Black
				Peg Stay Alignment	Opening end pointing to handle
				Peg Stay	Monkeytail - Black
				Dummy Hinges	None
				Hinge System	Pivot with Seigenia locks
				FSC Certified	No

Item: 3

FLUSH CASEMENT WINDOW IN MERANTI


Quantity: 1

Style: DL47

Item Reference: Lounge

Quote Ref: 456/3 V3

Key Features:

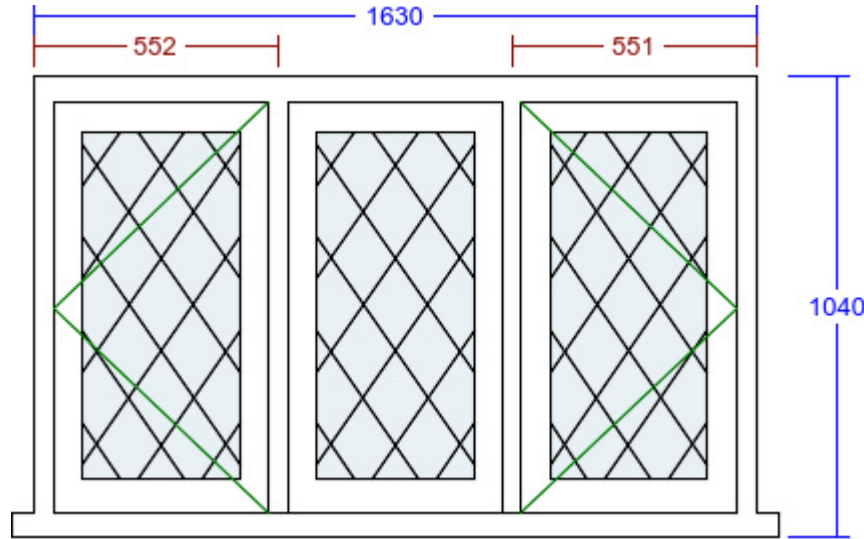

Detailed Specification:

VIEWED FROM OUTSIDE. POINT OF ARROW DENOTES HINGE POSITION.

Width (mm)	1630	Head Drip	Yes	Glass Pattern	Clear
Height (mm)	1040	Head Drip Horns	No	Glass Type	4mm Annealed
Frame Head Size	75mm	Factory Fit Head Drip	Yes	Glazing Features	Diamond Leaded Lights (145mm x 210mm)
Feature Mould	Ovolo	Add Ons Required	No	Lead Profile	Oval
Style Option	Dummy Sash	Trickle Vent Quantity	1	Lead Size	6mm
Equalise Glass Widths	Yes	Trickle Vent Size	EA 3000	Lead Joints	Overlay
Colour	Dark Oak	Trickle Vent Location	Head of Frame	Lead Finish	Standard
Cill	145mm x 68mm (Ext 55mm x 38mm)	External Grille Colour	Brown	Handle	Monkeytail - Black
Cill Species	Engineered Meranti	Window Board Required	No	Peg Stay Alignment	Opening end pointing to handle
Cill Horns	50mm Each Side			Peg Stay	Monkeytail - Black
Factory Fit Cill	Yes			Dummy Hinges	None
				Hinge System	Pivot with Seigenia locks
				FSC Certified	No

Item: 4

FLUSH CASEMENT WINDOW IN MERANTI





Quantity: 1

Style: DL21

Item Reference: Middle Bedroom

Quote Ref: 456/3 V3

Key Features:

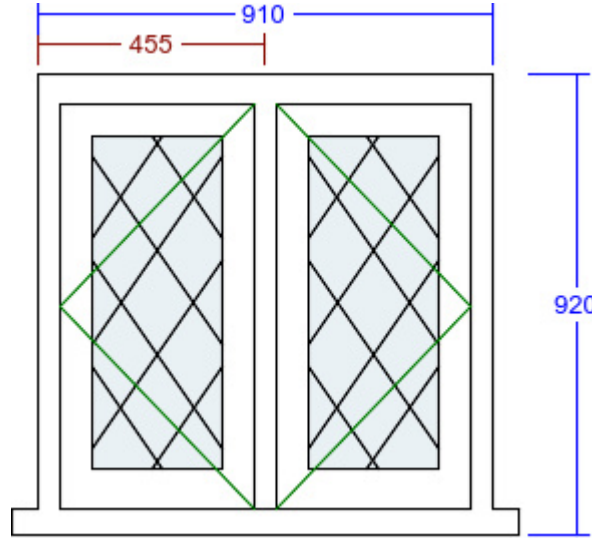

Associated Trims:

11. Flat - 20x150 2350mm

Detailed Specification:

VIEWED FROM OUTSIDE. POINT OF ARROW DENOTES HINGE POSITION.

Width (mm)	910	Head Drip	Yes	Glass Pattern	Clear
Height (mm)	920	Head Drip Horns	No	Glass Type	4mm Annealed
Frame Head Size	75mm	Factory Fit Head Drip	Yes	Glazing Features	Diamond Leaded Lights (145mm x 210mm)
Feature Mould	Ovolo	Add Ons Required	No	Lead Profile	Oval
Floating Mullion	No	Trickle Vent Quantity	1	Lead Size	6mm
Equalise Glass Widths	Yes	Trickle Vent Size	EA 3000	Lead Joints	Overlay
Colour	Dark Oak	Trickle Vent Location	Head of Frame	Lead Finish	Standard
Cill	145mm x 68mm (Ext 55mm x 38mm)	External Grille Colour	Brown	Handle	Monkeytail - Black
Cill Species	Engineered Meranti	Window Board Required	No	Peg Stay Alignment	Opening end pointing to handle
Cill Horns	50mm Each Side			Peg Stay	Monkeytail - Black
Factory Fit Cill	Yes			Dummy Hinges	None
				Hinge System	Pivot with Seigenia locks
				FSC Certified	No

Item: 5

FLUSH CASEMENT WINDOW IN MERANTI


Quantity: 1

Style: DL47

Item Reference: Master Bedroom

Quote Ref: 456/3 V3

Key Features:

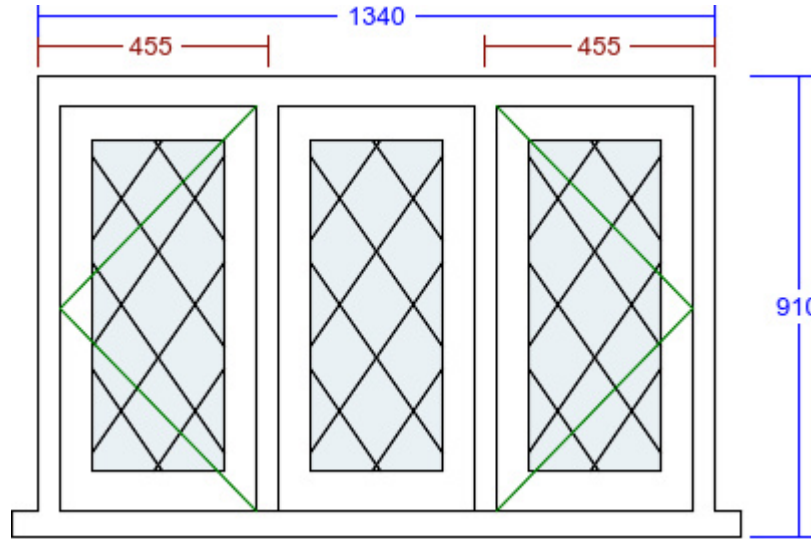


Associated Trims:
12. Flat - 20x150 2350mm

Detailed Specification:

VIEWED FROM OUTSIDE. POINT OF ARROW DENOTES HINGE POSITION.

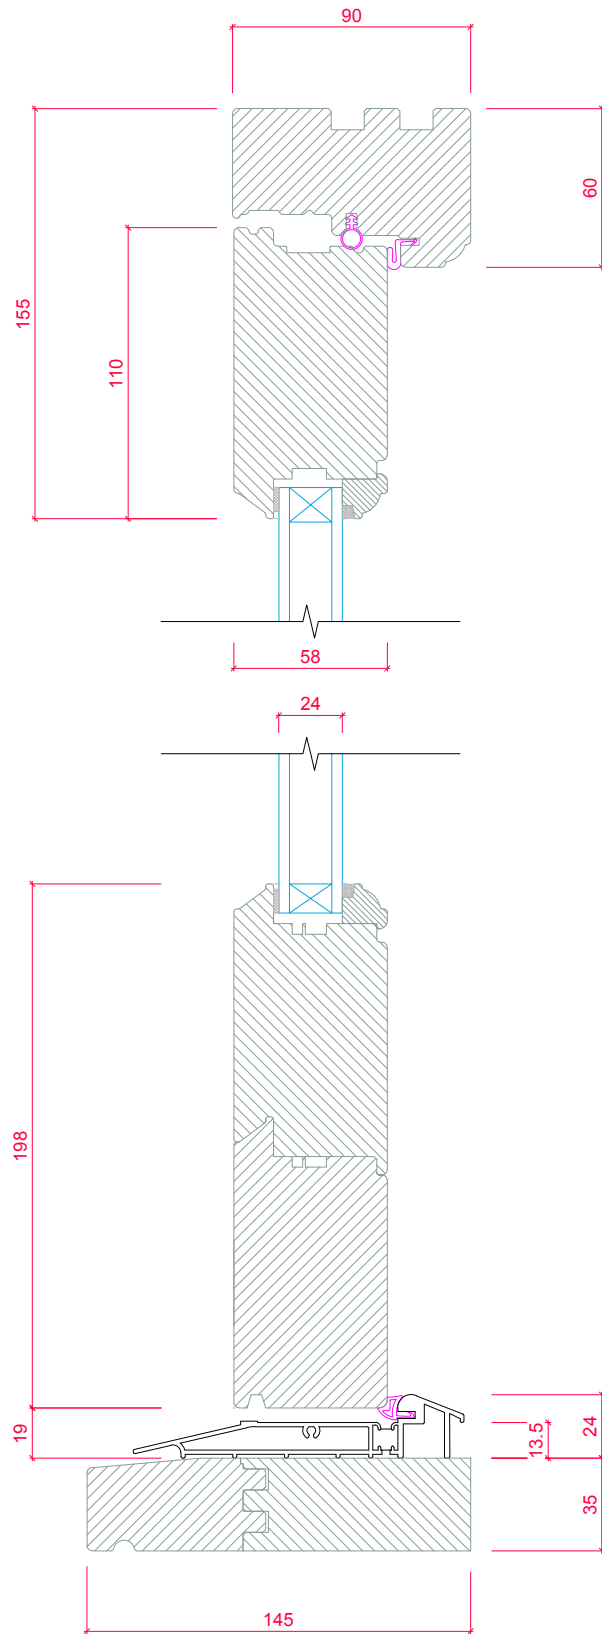

Width (mm)	1340	Head Drip	Yes	Glass Pattern	Clear
Height (mm)	910	Head Drip Horns	No	Glass Type	4mm Annealed
Frame Head Size	75mm	Factory Fit Head Drip	Yes	Glazing Features	Diamond Leaded Lights (145mm x 210mm)
Feature Mould	Ovolo	Add Ons Required	No	Lead Profile	Oval
Style Option	Dummy Sash	Trickle Vent Quantity	1	Lead Size	6mm
Equalise Glass Widths	Yes	Trickle Vent Size	EA 3000	Lead Joints	Overlay
Colour	Dark Oak	Trickle Vent Location	Head of Frame	Lead Finish	Standard
Cill	145mm x 68mm (Ext 55mm x 38mm)	External Grille Colour	Brown	Handle	Monkeytail - Black
Cill Species	Engineered Meranti	Window Board Required	No	Peg Stay Alignment	Opening end pointing to handle
Cill Horns	50mm Each Side			Peg Stay	Monkeytail - Black
Factory Fit Cill	Yes			Dummy Hinges	None
				Hinge System	Pivot with Seigenia locks
				FSC Certified	No



Optimal Door - Open Out
Feature Mould: Ovolo
Vertical Section
Standard Threshold with 145mm x 35mm Projecting Cill

Quote Ref: 456/3 V3

Trims

item	qty	style	species	colour	
11	1	Flat - 20x150 2350mm For 4. Flush Casement Window (Middle Bedroom)	Meranti	Dark Oak	
12	1	Flat - 20x150 2350mm For 5. Flush Casement Window (Master Bedroom)	Meranti	Dark Oak	
13	12	Cover Strip - 8x70 2350mm Finishing trim	Meranti	Dark Oak	