

# French Doors TOTAL70

REHAU offers a wide range of possibilities when a large opening is required to let the outside in. Our French Doors provide great aesthetics, durability and are energy efficient.



## Characteristics

REHAU French doors comprise a range of multi-chambered profiles that are designed to meet the requirements of the new build, commercial and domestic refurbishment markets and allow for excellent thermal insulation.

Available in open-in and open-out styles, with equal or non-equal split panes, and with flag, butt or cranked hinges for an all-round design.

Dummy mullion allows for full aperture opening.


French doors are available in a range of foil laminate options allowing for complete personalised profile design. Our complete range of foil laminate options can be seen on our colour page or the REHAU Colour Brochure.





Feature	Specification
Profile depth	70mm
Maximum door size	1900 x 2200mm
Thermal performance	Exceeds 1.0 W/m <sup>2</sup> K
Maximum sash weight	100kg
Glass width	4 – 44mm
Further options	Low threshold options for Part M compliance Decorative glass
Accreditations	See page 60

- 1 Dummy mullion allows for full aperture opening
- 2 Open-in and open-out styles available for increased versatility
- 3 Slim sightlines, perfectly suited to open up conservatories

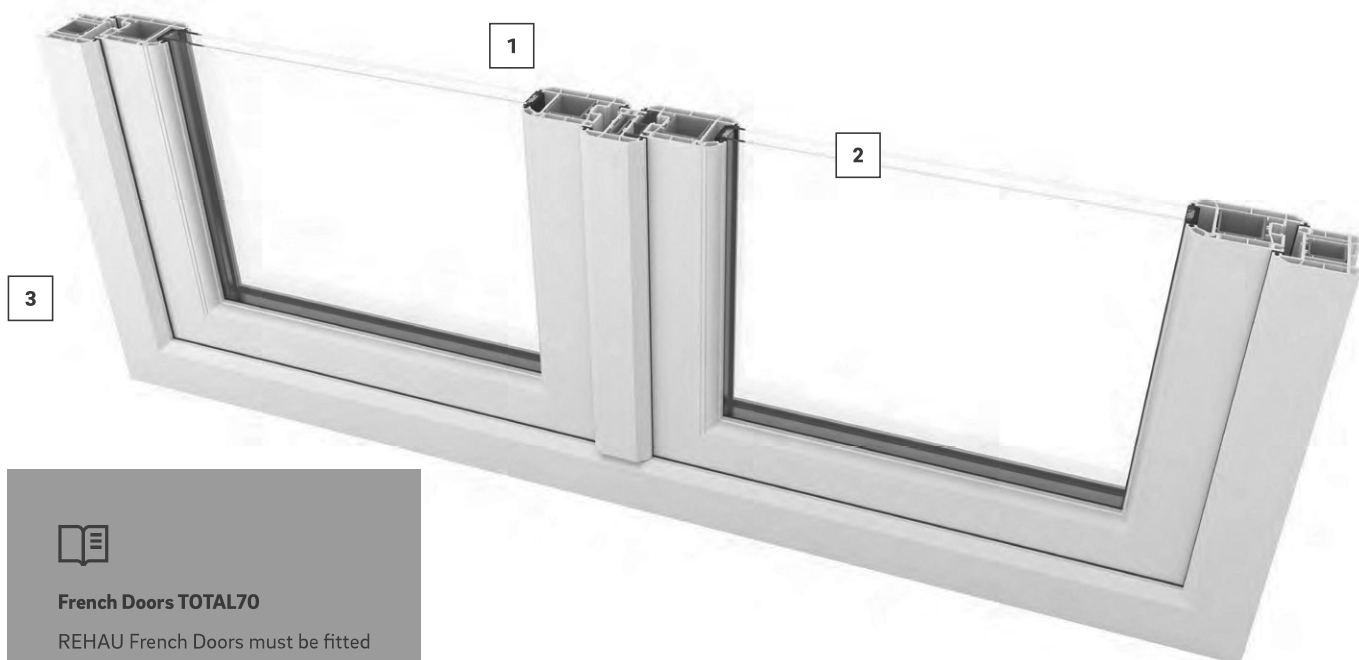

#### French Doors TOTAL70

REHAU French Doors must be fitted with safety glass, which meets the requirements of BS 6262.