




Proposed east elevation

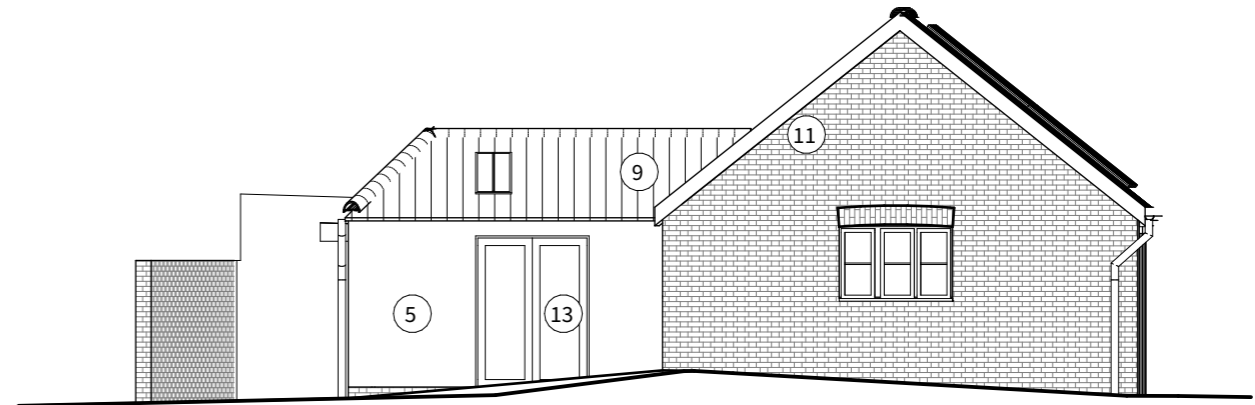

Proposed west elevation

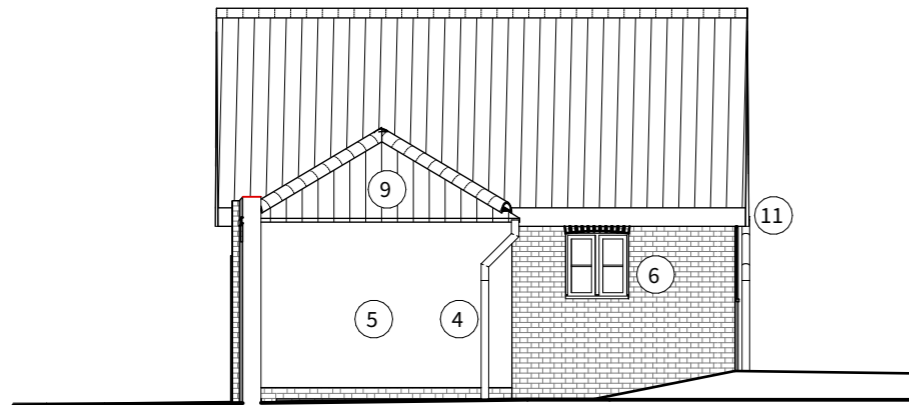

Proposed north elevation

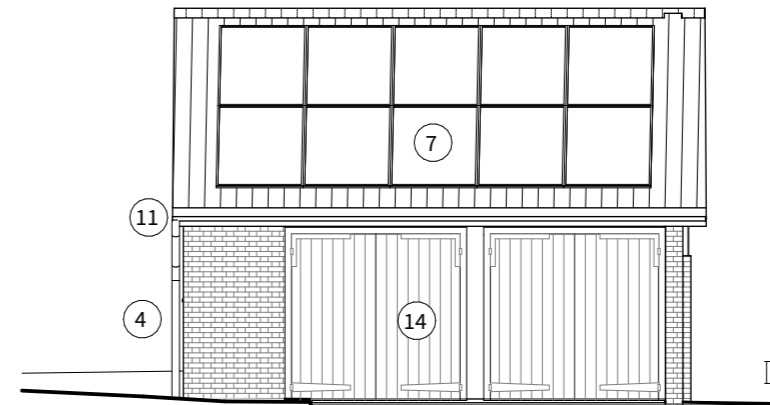


Proposed south elevation

Key

1. Existing red brick in Flemish bond internally insulated with breathable insulation.
2. Existing pantiles retained.
3. Existing stable doors with new glazed doors inserted into reveal to create thermal line.
4. Proposed aluminium rainwater goods; deep flow half round with traditional style downpipes.
5. Proposed painted lime render.
6. Brickwork repair; brickwork to be locally repaired where needed in matching brick and mortar.
7. Photovoltaic panels (shown indicatively, sizing TBC).
8. Conservation rooflight.
9. Proposed reclaimed clay pantiles to closely match existing
10. Existing garden wall retained
11. Existing bargeboards and eaves fascias replaced to match existing, or redecorated as necessary
12. Proposed window/glazed slot behind existing opening
13. Proposed glazed painted timber French doors
14. Existing timber stable doors to be restored. New glazed doors installed within internal reveal to form thermal line
15. Proposed window.
16. External terrace/hard landscaping.

PROPOSED POOL HOUSE ELEVATIONS

1:100@A3



(-) revisions 20.10.23 First issue to planning HUDSONArchitects <small>+44 (0)1603 766 220 www.hudsonarchitects.co.uk info@hudsonarchitects.co.uk</small>	job Fern House Reepham address EYNSFORD HOUSE NR10 4LA	PL-216 FHR <small>job code</small>	(-) revision
	title AS PROPOSED PROPOSED POOL HOUSE ELEVATIONS	status PLANNING	
	scale 1:100@A3	<small>Do not scale off dimensions. Check all dimensions on site and report any discrepancies immediately. This drawing is copyright.</small>	