


GLAZED BLUE

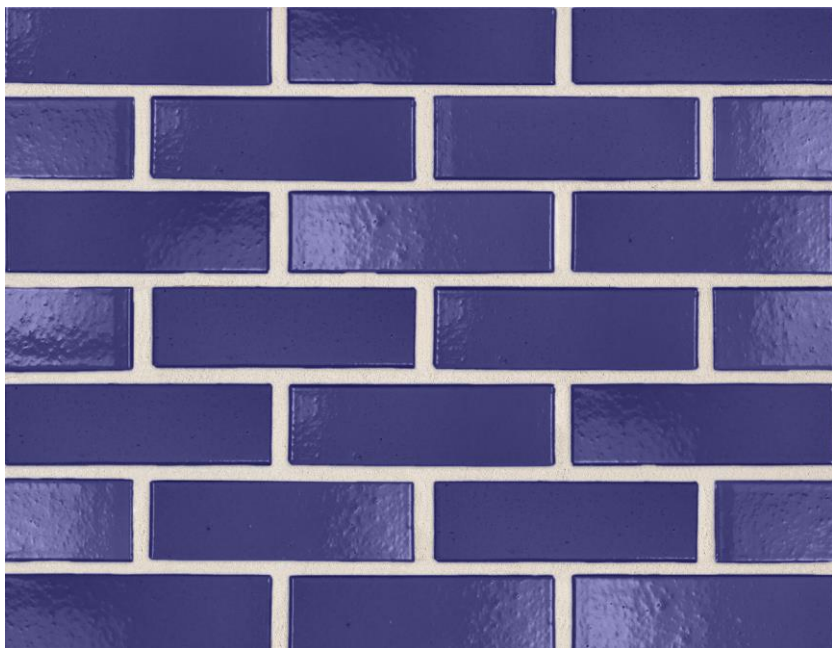

www.modularclayproducts.co.uk

01293 854430

salse@modularclayproducts.co.uk

Unit 18, Blackhouse Farm, Blackhouse Road, Colgate

West Sussex, RH13 6HS

Issue Date: January 2021

PRODUCT INFORMATION

Packaging	Shrink wrapped & Palletised
-----------	-----------------------------

TECHNICAL INFORMATION

Brick Dimensions (L x W x H)	215 x 102.5 x 65mm
Size Tolerances Mean & Range	T2, R2
Configuration	Perforated
Voids	37%
Mean Compressive Strength	45 N/mm ²
Active Soluble Salts	S2
Water Absorption	≤6%
Durability	F2
Gross Dry Density	1400 Kg/m ³
Equivalent Thermal Conductivity	0,21 W/mK
Initial Rate of Absorption	0.8 kg/(m ² min)