



## Code Specification

ASD Lighting Micro Highway Diamond™ Elite Flood, Black, Clear, IP66/IK10, 3000K. 111mm Height, 165mm Width, 255mm Length, Tool less entry to gear compartment.


Applications not limited to: Airport, Car Park, Commercial & Amenity, Education, Healthcare, Hospitality, Industrial & Warehousing, Rail & Transport, Social Housing, Sports Venue, Urban & Street Lighting.  
CE, UKCA, BS EN 60598, ENEC, Class I.

## Technical Information

Colour	Black
Diffuser	Clear
CCT	3000 K
System Power	38 W
Delivered Lumens	3561.5 lm
Efficacy	93.72 lm/W
Weight	3.5 KG
Design Life	100k hours to L90

## Dimensions

Height	111mm
Length	255mm
Width	165mm

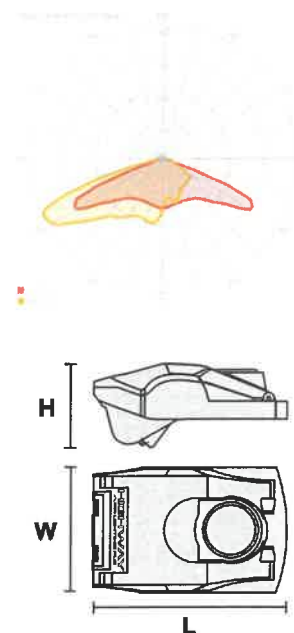

## Range Information

---

The Micro Highway Diamond is part of the Highway Diamond™ Elite family of luminaires with an unsurpassed flexibility of lumen outputs, optical distributions and specification features.

---

## Range Specification

---

UK designed, developed and manufactured

---

5 Year LED guarantee (extended warranties available)

---

10 Day delivery lead time

---

Four body sizes

---

3.5kg weight with spigot

---

3.1kg weight excluding spigot

---

< 0.02m<sup>2</sup> windage

---

Post top / side entry Ø 60 mm – Ø 76 mm (HWD2)

---

Post top tilt 0° / 5° / 10° / 15° / 20°

---

Side entry tilt -10° / -5° / 0° / 5° / 10° / 15°

---

Side entry Ø 28 mm – Ø 42 mm (HWD2S)

---

Inbuilt anti-tamper facility to secure gear compartment

---

## Range Options

---

Emergency option available

---

Mini Cell option available

---

NEMA Socket option available

---

PIR option available

---

Wall bracket option available

---

Corner wall bracket option available

---

Front, side & rear light shield options available

---

Other RAL colours available on request

---





## Code Specification


ASD Lighting Stealth Elite T-Beam Angle, Black, Clear, IP65/IK10, 3000K. 176mm Depth, 343mm Height, 330mm Width, Diffuser: Vandal resistant polycarbonate, Body: Die cast aluminium (powder coated). Applications not limited to: Airport, Car Park, Commercial & Amenity, Education, Healthcare, Hospitality, Industrial & Warehousing, Rail & Transport, Social Housing, Sports Venue, Urban & Street Lighting. UKCA & CE, BS EN 60598, ENEC, Class I.

## Technical Information

Colour	Black
Diffuser	Clear
CCT	3000 K
System Power	22.8 W
Delivered Lumens	2816.7 lm
Efficacy	123.54 lm/W
Weight	4.3 KG
Design Life	100k hrs L90-B10

## Dimensions

Depth	176mm
Height	343mm
Width	330mm

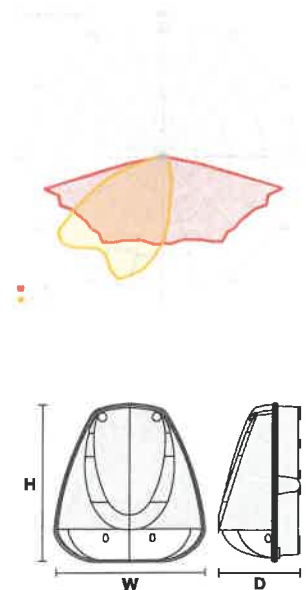

## Range Information

---

The Stealth Elite is a robust high performance exterior wallpack luminaire.

---

## Range Specification

---

High operation temperature version available

---

5 Year LED guarantee

---

ULOR as low as 0.6%

---

Standard specification paint finish passes 2000 hours Salt Spray Test in accordance with BS EN ISO 9227:2006

---

Flood, wide and T beam angle distribution available

---

Wall mount

---

10KV Surge Protection

---

Integrated Over Voltage Protection

---

Standby Power less than 0.5W

---

Latest generation of LED chips

---

BESA fixing and rear cable entry

---

## Range Options

---

CLO

---

Emergency option available

---

PIR / Photocell options available

---

Step Dim (Additional PIR required)

---

Astro Dim (Additional Photocell required)

---

Presence Detection (Additional PIR required)

---

