


Quote Ref: 3316/1 V1

Date: Thursday 21 September 2023

Quotation Prepared for:



Scope of Project:

Replacement - Carefully remove existing items, prepare openings and supply and fit replacements. To include all making good of aperture ready for final decoration by others. All installed in full compliance with Building Regulations Document L (2021 edition incorporating 2023 amendments) by our trained and experienced installers.

Site Address: As above

Technical Specification:

All products in multi-layer Engineered European Redwood or Finger Jointed Redwood sections for added stability. Factory glazed with argon/krypton gas filled double glazed units featuring soft-coat energy saving glass. Fully factory finished with high performance, micro-porous paint treatments. Flush casement windows with high security multi-point locking systems and locking handles. Conventional Cottage Casement windows with high security multi-point locking systems and locking handles. Entrance doors fitted with multi-point claw locks and robust, adjustable hinges. Where FSC is shown against an item, joinery is supplied as FSC Mix Credit under Chain of Custody Registration No TT-COC-005135

Item	Qty	Item Reference	Product	Style	Remarks
1	1	Living Room Window	Flush Casement Window	DL43	Monkeytail - Black. Horizontal Astragal Bars. Off White Finished. FSC
2	1	Spare Room Window	Flush Casement Window	DL17	Monkeytail - Black. Horizontal Astragal Bars. Off White Finished. FSC
3	1	Main Bedroom	Conventional Cottage Window	DL200	Monkeytail - Black. Horizontal Astragal Bars. Off White Finished. FSC
4	1	Front Door	Entrance Door	IN-A-Staverton	Cottage - Black. Dual Colour. FSC

Prepared By:
Maria Charles
Sales Executive

Your Project is covered by:



Nett Price:
VAT (20%):
Total Price:



Showroom: Stamford

Valid upon registration. Ask for full details

QUOTATION VALID FOR: 60 DAYS

Lead Time:

* Approximately 9-11 weeks from Sign Off of Final Detail.

Terms:

Deposit with Order: 50%

Stage Payment required before delivery due: 40%

Balance to installers on day of completion: 10%

Your Guarantees:

Fungal & Insect	Sealed Unit	Hardware	Workmanship	Paint	Stain
					
30 YEARS GUARANTEE	10 YEARS* GUARANTEE	10 YEARS GUARANTEE	10 YEARS GUARANTEE	12 YEARS GUARANTEE	6 YEARS GUARANTEE
* 5 years for 14mm double glazed units.		* 6 years for Meranti & Redwood: 1 year for Oak. Not applicable to putty finished products.			

Item: 1

FLUSH CASEMENT WINDOW IN FINGER JOINTED REDWOOD


Quantity: 1

Style: DL43

Item Reference: Living Room Window

Quote Ref: 3316/1 V1

Key Features:

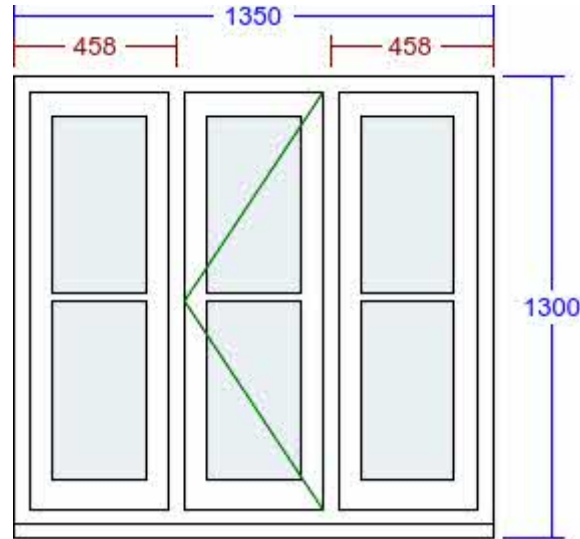

Detailed Specification:

VIEWED FROM OUTSIDE. POINT OF ARROW DENOTES HINGE POSITION.

Width (mm)	1350	Head Drip	None	Glass Pattern	Clear
Height (mm)	1300	Add Ons Required	No	Glass Type	4mm Tgh/6mm Krypton/4mm Tgh LowE (Putty Glazed)
Frame Head Size	60mm	Trickle Vents Required	No	Glazing Features	Horizontal Astragal Bars
Feature Mould	Ovolo	Window Board Required	No	Size of Bar	22mm (True Bar)
Style Option	Dummy Sash			Handle	Monkeytail - Black
Equalise Glass Widths	Yes			Peg Stay Alignment	Opening end pointing to handle
Colour	Off White (RAL 9010)			Peg Stay	Monkeytail - Black
Cill	145mm x 38mm (inc. in overall ht)			Dummy Hinges	None
Cill Species	Finger Jointed Redwood			Hinge System	Pivot with Seigenia locks
Cill Horns	No			FSC Certified	Yes
Factory Fit Cill	Yes				

Item: 2

FLUSH CASEMENT WINDOW IN FINGER JOINTED REDWOOD




Quantity: 1

Style: DL17

Item Reference: Spare Room Window

Quote Ref: 3316/1 V1

Key Features:

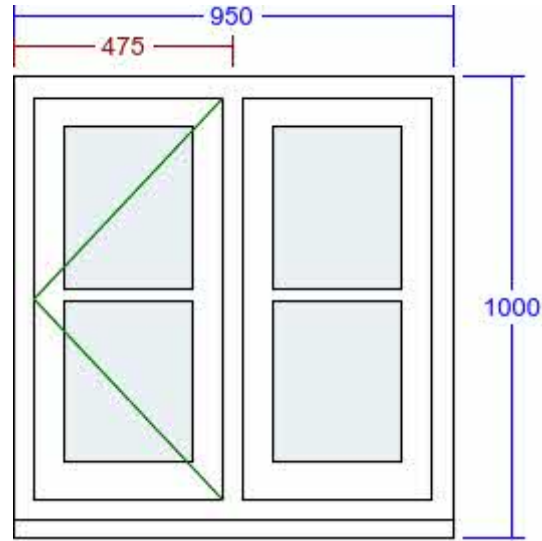

Detailed Specification:

VIEWED FROM OUTSIDE. POINT OF ARROW DENOTES HINGE POSITION.

Width (mm)	950	Head Drip	None	Glass Pattern	Clear
Height (mm)	1000	Add Ons Required	No	Glass Type	4mm Tgh/6mm Krypton/4mm Tgh LowE (Putty Glazed)
Frame Head Size	60mm	Trickle Vents Required	No	Glazing Features	Horizontal Astragal Bars
Feature Mould	Ovolo	Window Board Required	No	Size of Bar	22mm (True Bar)
Style Option	Dummy Sash	Handle		Peg Stay Alignment	Monkeytail - Black
Equalise Glass Widths	Yes	Peg Stay		Peg Stay	Opening end pointing to handle
Colour	Off White (RAL 9010)	Dummy Hinges		Dummy Hinges	Monkeytail - Black
Cill	145mm x 38mm (inc. in overall ht)	Hinge System		Hinge System	None
Cill Species	Finger Jointed Redwood	FSC Certified		FSC Certified	Pivot with Seigenia locks
Cill Horns	No				
Factory Fit Cill	Yes				

Key Features:

Detailed Specification: VIEWED FROM OUTSIDE. POINT OF ARROW DENOTES HINGE POSITION.

Width (mm)	800	Head Drip	None	Glass Pattern	Clear
Height (mm)	700				
Frame Head Size	60mm	Add Ons Required	No	Glass Type	4mm Anl/6mm Krypton/4mm Anl LowE (Putty Glazed)
Feature Mould	Ovolo	Trickle Vents Required	No	Glazing Features	Horizontal Astragal Bars
				Size of Bar	22mm (True Bar)
Colour	Off White (RAL 9010)	Window Board Required	No	Handle	Monkeytail - Black
Cill	145mm x 38mm (inc. in overall ht)			Peg Stay Alignment	Opening end pointing to handle
Cill Species	Finger Jointed Redwood			Peg Stay	Monkeytail - Black
Cill Horns	No			Dummy Hinges	None
Factory Fit Cill	Yes			Hinge System	Pivot with Kenrick locks
				FSC Certified	Yes

Item: 4

ENTRANCE DOOR IN EUROPEAN REDWOOD



Quantity: 1


Style: IN-A-Staverton

Item Reference: Front Door

Quote Ref: 3316/1 V1

Key Features:

A 
B 

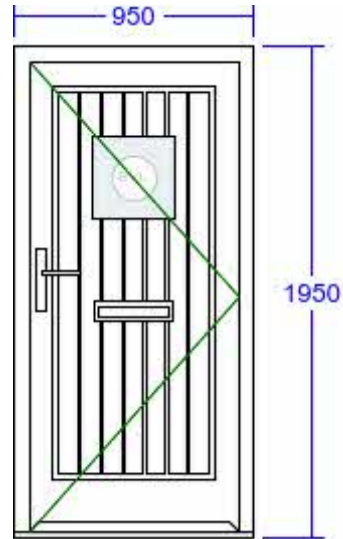


DRAWING NOTES: VIEWED FROM OUTSIDE. ARROW DENOTES HINGE POSITION.

DRAWINGS DO NOT DEPICT KNOCKERS, SPY HOLES, SECURITY CHAINS OR DOORKNOBS. REFER TO BROCHURE FOR FULL GLAZING CONFIGURATIONS.

Detailed Specification:

Overall Width (mm)	950	Head Drip	None	Door Sash Glass Pattern	Clear
Overall Height (mm)	1950				
Frame Head Size	60mm	Cill Type	Aluminium Threshold only	Glass Type	4mm Toughened/10mm Krypton/4mm Toughened LowE (18mm)
Stiles & Rails	110mm	Add Ons Required	No	Door Panel(s)	Plank Effect
Feature Mould	Ovolo	Trickle Vents Required	No	Door Sash Glazing Features	Bevel No Colour
Door Glass Size (Visible)	Width: 325mm / Height: 332mm	Threshold Board Required	Yes	Door Handle	Cottage - Black (Dark Kaba)
Hinge Side	Right	Threshold Board Species	Engineered European Redwood	Door Knocker	Regency - Black
Door Opens	In	Threshold Board Colour	Tent Grey (RAL 7033)	Letterbox	Blacksmith Traditional - Black
Door Sash Style	Staverton	Threshold Board Length (mm)	950	Letterbox Height (mm)	900
Door Type	Standard	Threshold Board Width (mm)	95	Security Chain	None
				FSC Certified	Yes
Internal Colour	Off White (RAL 9010) (B)	Hinge Colour	Black		
External Colour	Tent Grey (RAL 7033) (A)	Threshold Colour	Black		
		External Access	Yes		

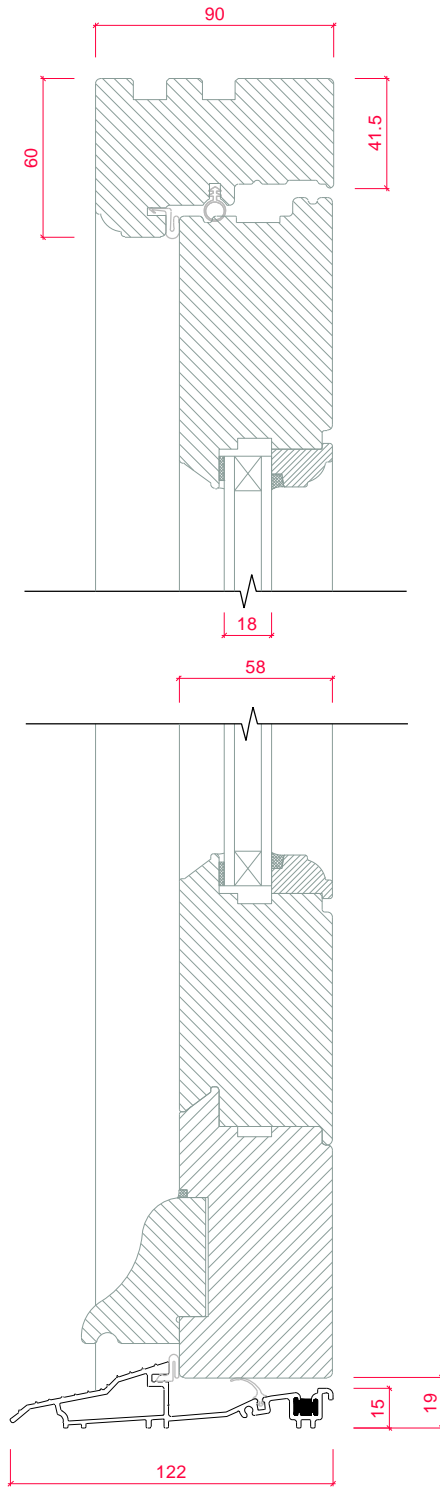

18mm Double Glazed Door - Open In
Feature Mould: Ovolo
Vertical Section
Standard Aluminium Threshold