




Roof pitch




Details

- The elegant choice for roof pitches from 2-15°.
- Glass-to-edge flat glass top unit.
- Unique window construction with a slim frame and invisible sash.
- Available with double or triple glazing for excellent energy performance and sound reduction.
- Laminated insulated glass unit for safety.
- Burglary resistant*.
- Comes in a fixed or electrically-vented variant.
- Electrically-vented variant provides fresh air at the touch of a button and a pre-installed rain sensor.

* Complies with EU legislative requirements for burglary resistance, class 2.

Blind options

The blinds are discreetly placed in the base-unit construction, between the lower pane and outer glass, and do not compromise daylight, design or your views to the sky. See more about blinds options on p118.

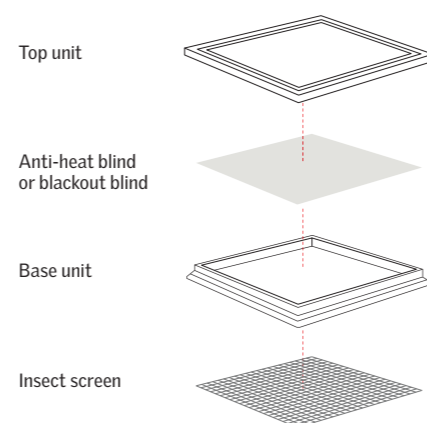

Mounting of blinds is done most conveniently during the rooflight installation process.

Home automation

- The electrically-vented variant can be upgraded with our smart-home, sensor based system – VELUX ACTIVE with NETATMO – to create a healthier indoor climate.

Read more on p24.

Availability

- For glass rooflights available until Summer 2021, please see p65.



Flat roof windows

New Generation

Flat glass rooflight

Fixed or vented option available

Part of our new generation of rooflights, the VELUX flat glass rooflight will bring the magic of daylight into your home. The unique design with a slim frame and invisible sash provides maximum daylight and a beautiful design from inside the home – even with a blind installed.

- Maximum daylight area
- Excellent energy performance
- State-of-the art design
- Excellent sound reduction

Available sizes (w×h) cm	U-VALUE**		060060 090060 080080 090090 100100 120090 120120								LEAD TIME		
	Urc,ref300 W/(m²K)	Arc,ref300 Area m²	60×60	90×60	80×80	90×90	100×100	120×90	120×120	GB	NI		
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
													<input type="checkbox"/>
Top cover													
ISU 2093 Flat glass top unit			320	353	381	423	470	489	611	2	3		
Base													
CFU 0020Q Fixed base unit 2 layer glazing	0.75	4.1	306	338	365	405	450	468	549	2	3		
CFU 0025Q Fixed base unit 3 layer glazing	0.60	4.1	398	439	474	527	585	608	714	8	9		
CVU 0220Q Electrically-vented base unit 2 layer glazing	0.75	4.1	846	878	905	945	990	1,008	1,089	2	3		
CVU 0225Q Electrically-vented base unit 3 layer glazing	0.60	4.1	938	979	1,014	1,067	1,125	1,148	1,254	8	9		
Installation accessories													
ZCU 0015 Extension kerb 150mm			180	190	193	194	212	221	252	2	3		
ZZZ 210U Frame fixing kit			41	44	44	46	48	48	53	2	3		
LSF 2000 NEW Lining*			245	263	269	280	292	298	315	8	9		

* Lining for flat roof. This all-in-one solution includes PVC panels, vapour barrier and facings.

** Calculated for a reference size of 1.2x1.2 m and 300 mm upstand, in a 0° roof pitch. Delivery time is approximate in working days from receipt of an order placed before 4pm (UK) and 11.30am (NI).

All prices in GBP (£)
Find all sizes and prices on velux.co.uk