

LEGEND

ECOLOGY

		1 No. Wooden bat box
--	--	----------------------

ELECTRIC VEHICLE CHARGIN POINT

		EO Mini Pro 2 32A 1-Phase Charger Wall mounted at 750mm min height from ground
--	--	--

PLANTING SCHEDULE

HEDGEROW			
Number	Abbrev.	Species	Specification
20 No.	LAUR	Prunus laurocerasus (laurel)	To be planted 500mm between the plants in the row, plants should be 450-600mm high at the time of planting railings.

TREES		
Number	Abbrev.	Specification
1 No.	A	Proposed Tibetan cherry
1 No.	B	Proposed Norwegian Maple
1 No.	C	Proposed Red Oak
1 No.	D	Proposed Magnolia
1 No.	E	Proposed Weeping Pear
1 No.	F	Proposed Holly
1 No.	G	Proposed Amber Platinum

PLANTING NOTES

Planting Pit and Trench Preparation: Tree pits in soft landscape to be excavated to 1m x 1m x 1m depth prior to topsoiling and all shrub planting areas excavated to 450mm depth. Excavation of planting pits, beds or trenches shall not take place when the ground is frozen or waterlogged. All excavated areas to be backfilled. All topsoiled areas to be clear of rocks and any other debris.

Planting: All plants shall be planted in a random fashion avoiding formal regimented lines. Unless otherwise stated planting shall be carried out during the period of 1 Nov to 31 March when the ground is not frozen or waterlogged. If planting is required outside this period agreement shall be sought and all bare root plants shall be substituted with container grown stock.

Watering: All plants shall be watered in to field capacity immediately after planting and mulched with 50mm depth of medium grade crushed mulch. The Contractor shall water the trees, shrubs and hedges once daily so that the entire tree pit or planted area is maintained to field capacity. i.e. the amount of water retained by previously saturated soil once full drainage has ceased. Watering to field capacity shall continue frequently and on a regular basis as considered necessary by the landscape contractor and as necessary to ensure the successful establishment and continued thriving of all planting. Additional watering shall be undertaken during summer months and/or periods of drought.

Staking: All trees within soft landscape areas to be double staked with cross bar and tied, using 1.5m long, 75mm diameter rounded tree stakes 75mm thick, rubber tie and spacer block. Stakes not to extend more than 650mm above ground level.

Protection: Protection of existing vegetation to be retained. Existing trees to be retained shall be protected in accordance with BS5837, from commencement to completion of all works on site.

THE GRANARY, READS LANE
CUBLINGTON, BUCKINGHAMSHIRE
LU7 0LE



PROPOSED LANDSCAPE & EXTERNAL WORKS

1:100@A1	NOV '23		
RHC	106	-	

BLACKWOOD ARCHITECTS

E: office@blackwoodarchitects.co.uk
T: 01296 399959

3 Camera House
Merlin Centre
Cobdenhouse Close
Aylesbury HP19 8DP

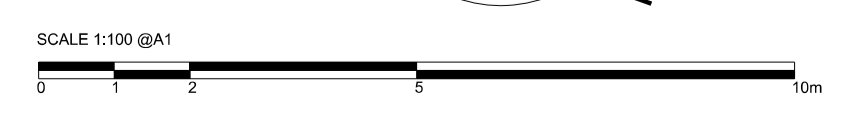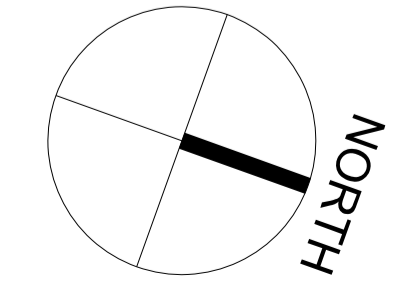

The Walled Gardens

Reads Lane

Pond