



Rhododendrons cleared from drive to open up views into this area




Mown paths cut through the area, between existing and new trees



0 1 2 3 4 5 10
Scale bar (m)

N ←

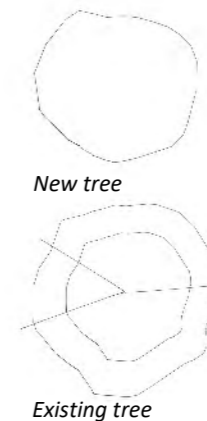

Additional information:

Revisions:
Rev A 06.11.23

Project:
Ladybrook

Drawing title:
Orchard & kitchen garden

Scale:
1:300@A3

Date:
1st August 2023

Drawn by:
JS

This drawing is indicative and shows design intent only. It must be read in conjunction with the Specification and other relevant drawings. All measurements are to be verified on site and confirmed by the contractor before the commencement of works

Method:

1. Remove all trees required (low amenity value, damaged and diseased), as directed, to leave a framework of established trees
2. Prune remaining trees as necessary, for individual tree health
3. Remove rhododendrons flanking drive
4. Kill off vegetation with a mix of spraying, followed by cutting and removing or flail and collect. 2-4 sprays over the course of a growing season (May to October) 2800 sq m
5. Plant 10no 14-16 std wrb additional trees over winter. Stake above ground
6. Final spray in Spring to kill off any germinating seeds
7. Sow wildflower mix, allow to establish and mow paths as required, once established

Additional information:



Water supply



Revisions:

Rev A 06.11.23

Project:

Ladybrook

Drawing title:

Orchard & kitchen garden

Scale:

1:50@A3

Date:

1st August 2023

Drawn by:

JS

This drawing is indicative and shows design intent only. It must be read in conjunction with the Specification and other relevant drawings. All measurements are to be verified on site and confirmed by the contractor before the commencement of works

Additional notes:

1. Exact location tbc
2. Beds to be marked out, edged and dug over. All large stones and roots to be removed. Top dress with organic compost
3. Grass paths to be turfed
4. Entire area to rabbit and deer proofed. Contractor design item. 1no gate for access
5. Plant hedge around perimeter (2px 1 day)