



## KKF Filter Cassettes

### Filter module for MUB fans

- Easy maintenance
- Supports multiple filter classes

[Find more details in our online catalogue.](#)

### Multibox fitting

The KKF fits Systemair MUB multiboxes exactly in terms of design and dimensions, therefore it is directly connectable to the suitable Multibox.

### Multiple filter classes

The filter module is designed to support panel filters of filter classes ePM10 60%, ePM1 55% and ePM1 85% (formerly M5, F7 and F9).

### Easy inspection

A removable inspection panel makes it simple to replace the filter and carry out maintenance.


## Technical parameters

### Dimensions and weights


Weight	17.9 kg
--------	---------

**Performances**


M5 / ePM10 60%

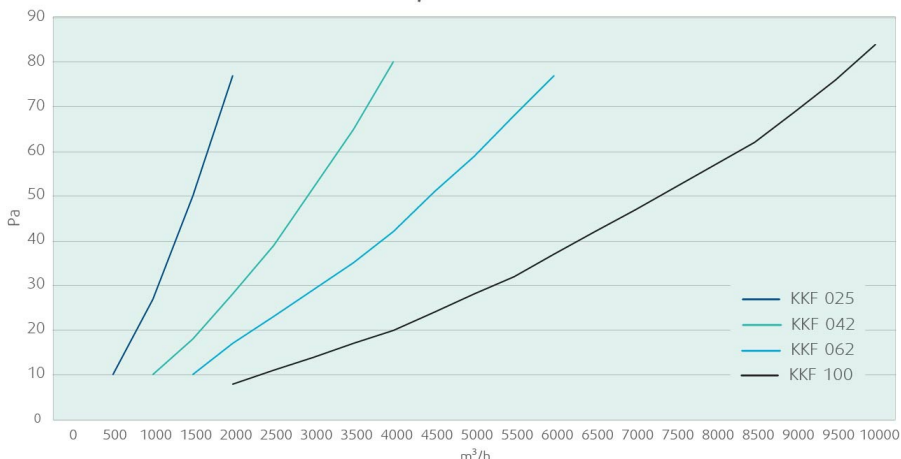


F7 / ePM1 55%

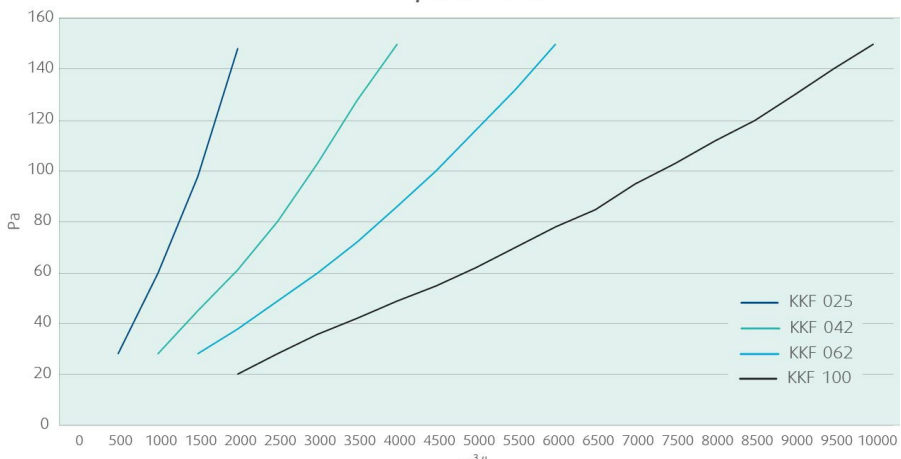

F9 / ePM1 85%

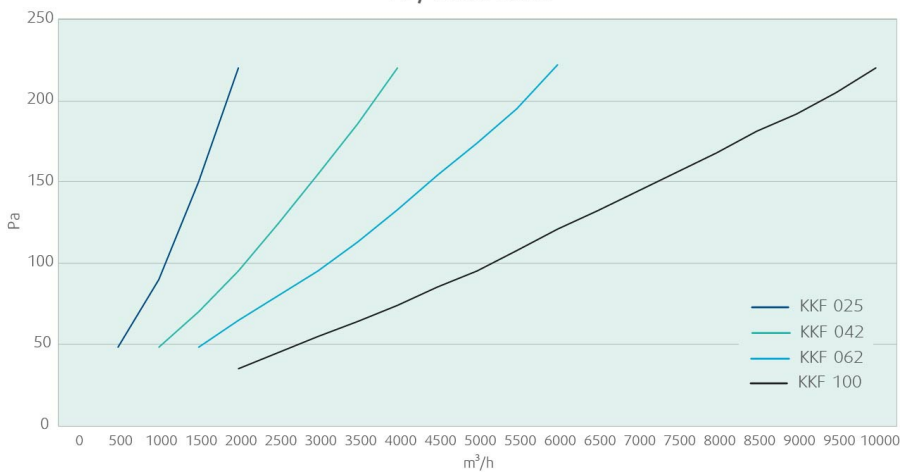

**Dimension**

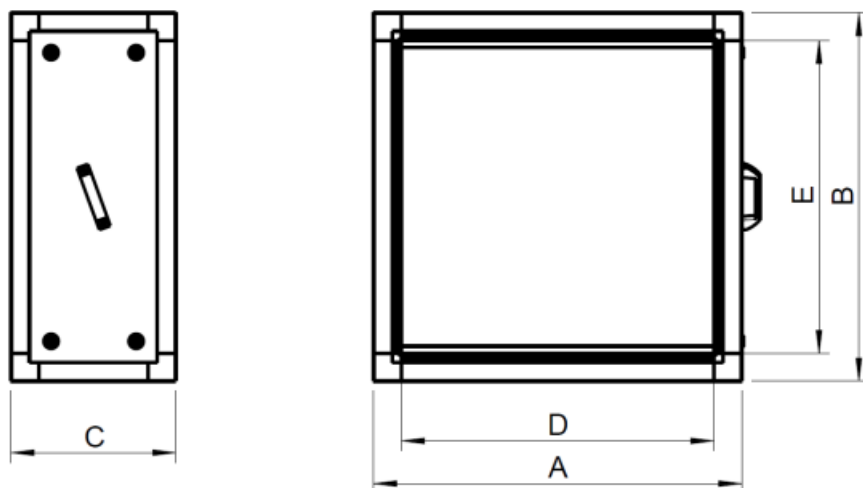

KKF	A	B	C	D	E
KKF 025	520 mm	520 mm	378 mm	378 mm	378 mm
KKF 042	690 mm	690 mm	378 mm	548 mm	548 mm
KKF 062	820 mm	820 mm	378 mm	678 mm	678 mm
KKF 100	1020 mm	1020 mm	520 mm	878 mm	878 mm