







**UK
Planning
Maps**

9 Abbey Row, Kelso, TD5 7JF

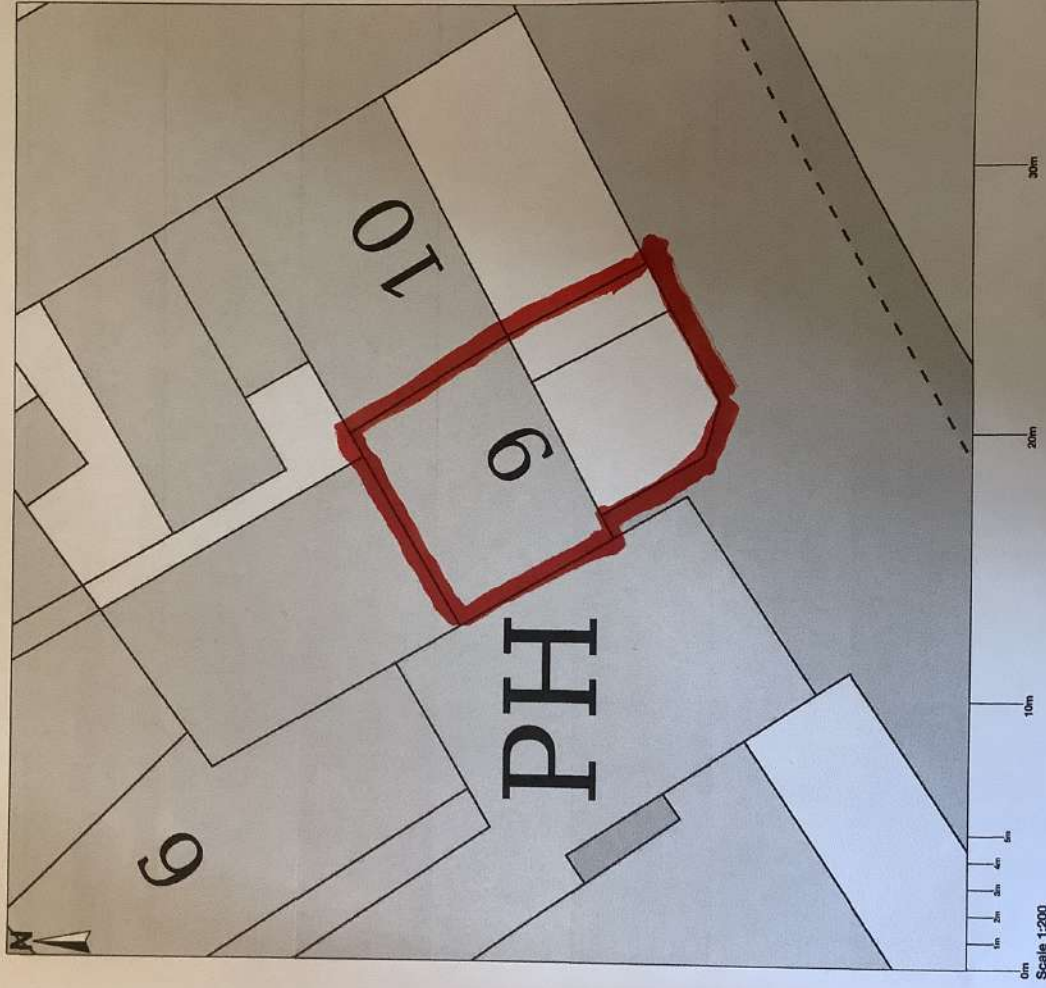

© Crown copyright and database rights 2023 OS 100054135. Map area bounded by: 372803,633918
372839,633954. Produced on 15 November 2023 from the OS National Geographic Database. Supplied by
UKPlanningMaps.com. Unique plan reference: b36e/uk/1026291/1383774



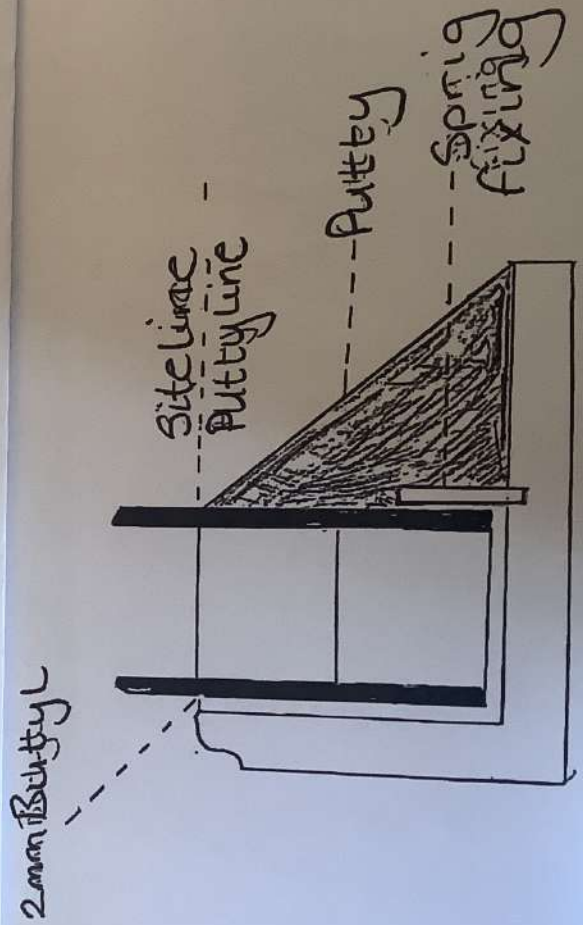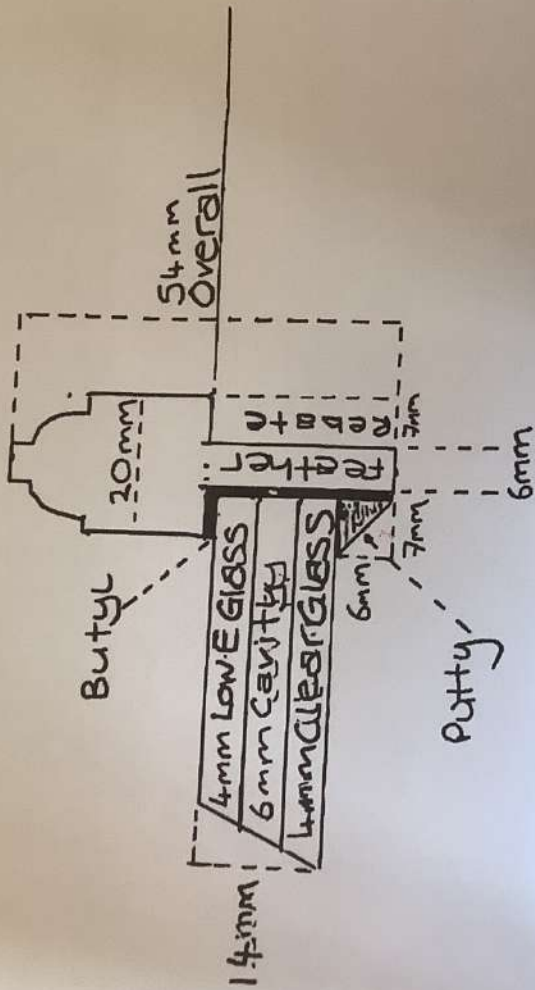

Edgeotech
A Quamex Building Products Company

Super Spacer® HERITAGE

Super Spacer® Heritage is an elegant 21st century solution to an age-old problem; high performance with outstanding aesthetics.

A high performance warm edge spacer system, Super Spacer® Heritage is designed especially to meet the needs of the restoration and replication sectors where the overriding criterion is authenticity.

Super Spacer Heritage Benefits

- High performance with outstanding aesthetics
- Neutral in appearance and blends with any frame finish for outstanding aesthetics
- Available with unit cavity options of 4mm, 6mm and 8mm
- Just 3mm in depth for ultra slim sightlines
- Heritage is applied using Edgeotech's unique Heritage Shuttle which provides ruler straight edges and sharp 90° corners while enabling fast application with excellent productivity

Super Spacer® Heritage is a flexible foam spacer developed for the restoration, replication and refurbishment market. Desiccant filled with pre-applied adhesive, the structural foam spacer significantly simplifies sealed unit manufacture yet enables slim sightlines and narrow unit cavities.

Compatible with:

✓ Hot Melt Butyl
Secondary Sealant



Super Spacer[®] HERITAGE

Warm-Edge Foam Features & Benefits

- Superior organic foam insulation
- Low thermal conductivity
- Substantially reduced condensation

Polymeric Foam Features

- Excellent UV resistance
- Extreme temperature performance
- Fast dry-point drop
- Superior compression-set resistance
- Excellent colour stability

Edge Seal Durability

- Continuous vapour barrier
- No chemical leaching
- High desiccant content

Unique Dual-Seal Design

- Inner structural acrylic side adhesive
- Irremovable unit handling
- No cold flow or spacer seal migration

Improved Productivity

- Fast application
- Elimination of desiccant filling
- No corner key assembly
- Simplified shipped unit production
- Limited equipment investment
- Small labour force required

Pleasing Aesthetic Appearance

- Smooth matte surface finish
- Pleasing neutral appearance
- No surface blistering or bubbling
- Straight line application with 90° corners
- Ultra slim sightline

Colours

Super Spacer Heritage is available in Black.

Composition

Polymeric foam base with desiccant pre-fill

Desiccant Fill

3A molecular-sieve, 38% minimum by weight.

Edge Clip Options

- IntelliClip SDL Duplex Edge Clips
- IntelliClip Flexible Edge Clips
- IntelliClip Georgian Edge Clips

Please ask for more details on our clips.

Spacer Cross-section

Flexible polymeric foam



Pressure-sensitive acrylic adhesive

Multi-layer vapour barrier

Characteristics

| Verified secondary products | Spec. / Typical Value | Norm |
|---|---------------------------|-------------|
| Reference IG Institute Technical Bulletin E0008 | | N/A |
| Fogging | No fog in visual area | EN 1279 - 6 |
| I.D. Durability | Pass with hot metal bush† | EN 1279 - 2 |

Reel Sizes

| Width (mm) | Metre / Reel | Suggested Max. Unit Size* |
|------------|--------------|---------------------------|
| 4.0 mm | 100 m | 600 mm x 600 mm |
| 6.0 mm | 80 m | 750 mm x 1000 mm |
| 8.0 mm | 60 m | 750 mm x 1200 mm |

*Due to potential glass deflection with narrow unit laminates, effective maximums will also vary with different cavity fills.

Note: Data is correct at time of going to print but is subject to change as further testing is undertaken.

Blanking of IG units incorporating Super Spacer Heritage should always be carried out in accordance with the recommendations of window and curtain manufacturers and IG Units and Glazing of Refer sites. IG units incorporating Super Spacer Heritage and hot-melt butyl are not compatible with liquid oil putties.



Google

© 2023 Google

9 Abbey Row

9 Abbey Row

9 Abbey Row, Kelso TD5 7JF · 79 ft
Building





