


ROOF TILES

Tile Range

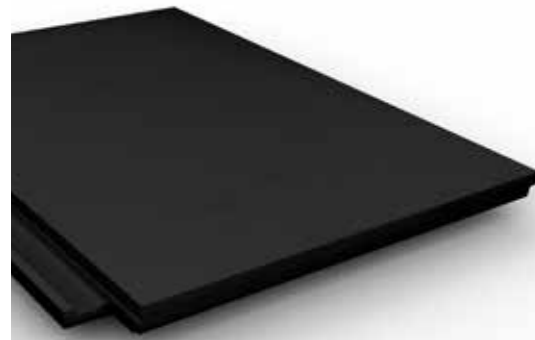

ROOF ACCESSORIES

Ridge Tiles

Multi Ridge
457mm x 250mm
Weight
5kg
Maximum Roof Pitch
45°




COLOURS

Available in 4 Colours

Grey



Brown



Anthracite



Terracotta



**15 YEAR
FULL ROOF
GUARANTEE**



Thin Flat Tile

Size	Thickness
420mm x 334mm	19.5mm
Weight	Minimum Headlap*
4.7kg	75mm (normal exposure)
Minimum Pitch*	Maximum Gauge
100mm headlap - 17.5°	345mm
75mm headlap - 22.5°	
Cover Width	Covering Capacity
305mm	75mm headlap - 9.7 tiles/m ²
Weight of Tiling	Weight of Tiling
75mm headlap - 45kg/m ²	100mm headlap - 10.5 tiles/m ²
100mm headlap - 49kg/m ²	
Batten Size	Nail Size
50 x 25mm (rafters not exceeding 600mm c/c)	40mm x 3.35mm
	Aluminium Alloy
Tiles per Band	Tiles per Pallet
38	228
Weight of Pallet	
1086kg	

Duo Thin Flat Tile

Size	Thickness
420mm x 334mm	19.5mm
Weight	Minimum Headlap*
4.7kg	75mm (normal exposure)
Minimum Pitch*	Maximum Gauge
100mm headlap - 17.5°	345mm
75mm headlap - 22.5°	
Cover Width	Covering Capacity
305mm	75mm headlap - 9.7 tiles/m ²
Weight of Tiling	Weight of Tiling
75mm headlap - 45kg/m ²	100mm headlap - 10.5 tiles/m ²
100mm headlap - 49kg/m ²	
Batten Size	Nail Size
50 x 25mm (rafters not exceeding 600mm c/c)	40mm x 3.35mm
	Aluminium Alloy
Tiles per Band	Tiles per Pallet
38	228
Weight of Pallet	
1086kg	

Seawave Tile

Size	Thickness
420mm x 334mm	26mm
Weight	Minimum Headlap
4.5kg	75mm
Minimum Pitch	Maximum Gauge
75mm headlap - 22.5°	345mm
Cover Width	Covering Capacity
305mm	75mm headlap - 9.8 tiles/m ²
Weight of Tiling	Weight of Tiling
75mm headlap - 47kg/m ²	100mm headlap - 10.6 tiles/m ²
100mm headlap - 51kg/m ²	
Batten Size	Nail Size
50 x 25mm (rafters not exceeding 600mm c/c)	40mm x 3.35mm
	Aluminium Alloy
Tiles per Band	Tiles per Pallet
35	210
Weight of Pallet	
960kg	

VENTILATION PRODUCTS

Underlay



FP McCann 150gsm Vapour Permeable Membrane

High performance breather membrane
3 layer membrane
Suited for all wind zones
Tested to BS5534:2014 +A2:2018
wind loading
Supplied via partnership with Permavent



Eaves Vent System 6m



Roll Out Rafter Eave Vent
300mm x 6m



Over Fascia Ventilator
10mm or 25mm x6



Felt Support Tray
x10

The Eaves Vent System 6m is available as either a 2 part or 3 part system providing a 10mm or 25mm ventilation gap.

McCannVent

Recommended Tile Spacing
5mm gap - 2m centres
10mm gap - 1m centres



Free ventilation area
10,000mm²

Profiles Available
Thin Flat, Duo Thin Flat and Seawave

FIXINGS AND CLIPS

Tile Fixings



2-1 Clip



Thin Flat Verge Clip



Seawave Verge Clip



Batten End Clip



Batten Holder

DRY FIX SYSTEMS

McCannFast Ridge 6m



McCannFast Ridge Roll 6m
Ventilated or Unventilated
100mm x M5 S/S Screw x10

McCannFast Ridge Union
x10

McCannFast Union Clip
x10

Ridge Batten Connector
x10

McCannFast Hip 6m



McCannFast Hip Roll 6m
Unventilated
125mm x M5 S/S Screw x10

McCannFast Hip Union
x10

McCannFast Union Clip
x10

Hip Batten Connector
x10

Filon Products Dry Fix Valley System



Eaves Closure Piece



Top Closure Piece 90°



GRP Dry Fix Valley Trough 3m

Minimum Pitch: As per tile profile Maximum Pitch: 60°

All components available with a 70mm or 110mm upstand

Dry Verge System



Dry Verge Unit



Multi Ridge End Cap

McCann

fpmccann

GET IN TOUCH

Jonathan Pratt

National Roof Tile Manager Roofing Division

Phone: 07740 433860
Email: JPratt@fpmccann.co.uk



Cadeby Factory

Brascote Lane,
Cadeby,
Nuneaton,
Warwickshire,
CV13 0BB