



- KEY PLANTING PLAN**
- Site boundary
  - Proposed reinforced amenity grass to accommodate fire tender access. Make up to fire access requirements
  - Proposed hedging, shrub & ground cover planting. For density and species refer to planting schedule on 350mm imported topsoil & 350mm imported subsoil with 50mm mulch finish
  - Proposed tree planting, soft landscape. 16nr, 18-20cm girth; 450-500cm height. 1,100 x 1,100 x 900mm pit filled with 300mm 50% imported topsoil & 50% compost on top of 600mm imported subsoil. Allow for 10no root directors. Staked. Finish: 75mm bark mulch.
  - Existing tree to be retained
  - 01 Prunus spp; multistem; Height: 3m; Spread: 3m
  - 02 Prunus spp; Height: 5m; Spread: 5m
  - 03 Prunus spp; Height: 5m; Spread: 4m
  - 04 Prunus spp; Height: 5m; Spread: 4m
  - Tree protection measures such as hand digging in line with BS5837-2012 will be applied during construction.
  - Tree Protection Fencing. Heras fencing to protect existing trees from any potential damage during construction. To be installed in front of existing retaining wall.

**All proposed planting in:**  
 Approved imported topsoil over approved imported subsoil. Cultivate, adding compost, and plant with density as outlined above.


Trees and shrubs to be in accordance with BS 3936 Part 1:1992, and shall be planted to BS 4043:1989. Topsoil to be Multipurpose Grade in accordance with 'BS 3882-2015 Topsoil'.

Subsoil to be Multipurpose Grade in accordance with 'BS 8601-2013 Specification for subsoil and requirements for use'.

Minimum combined depth of topsoil and subsoil to be 700mm

**Finish** All low shrub/perennial planting: 50mm depth composted bark mulch finish.

**Finish** All tree planting: 75mm depth composted bark mulch finish.

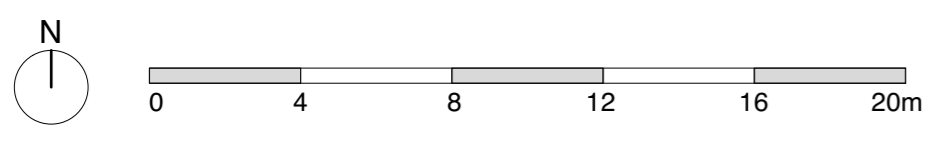

revision date	notes
Kildonan Street	
Client: North Lanarkshire Council	
Drawing title: Planting Plan	
Drawing nr 2305.L.G(92)002-PL	
Rev: 1:200 @A2 04.12.'23	
Planning Submission	